



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11


(2.10 GHz, Intel Xeon Platinum 8558)

SPECspeed®2017_fp_base = 369

SPECspeed®2017_fp_peak = 369

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2024
Hardware Availability: Feb-2024
Software Availability: Dec-2023

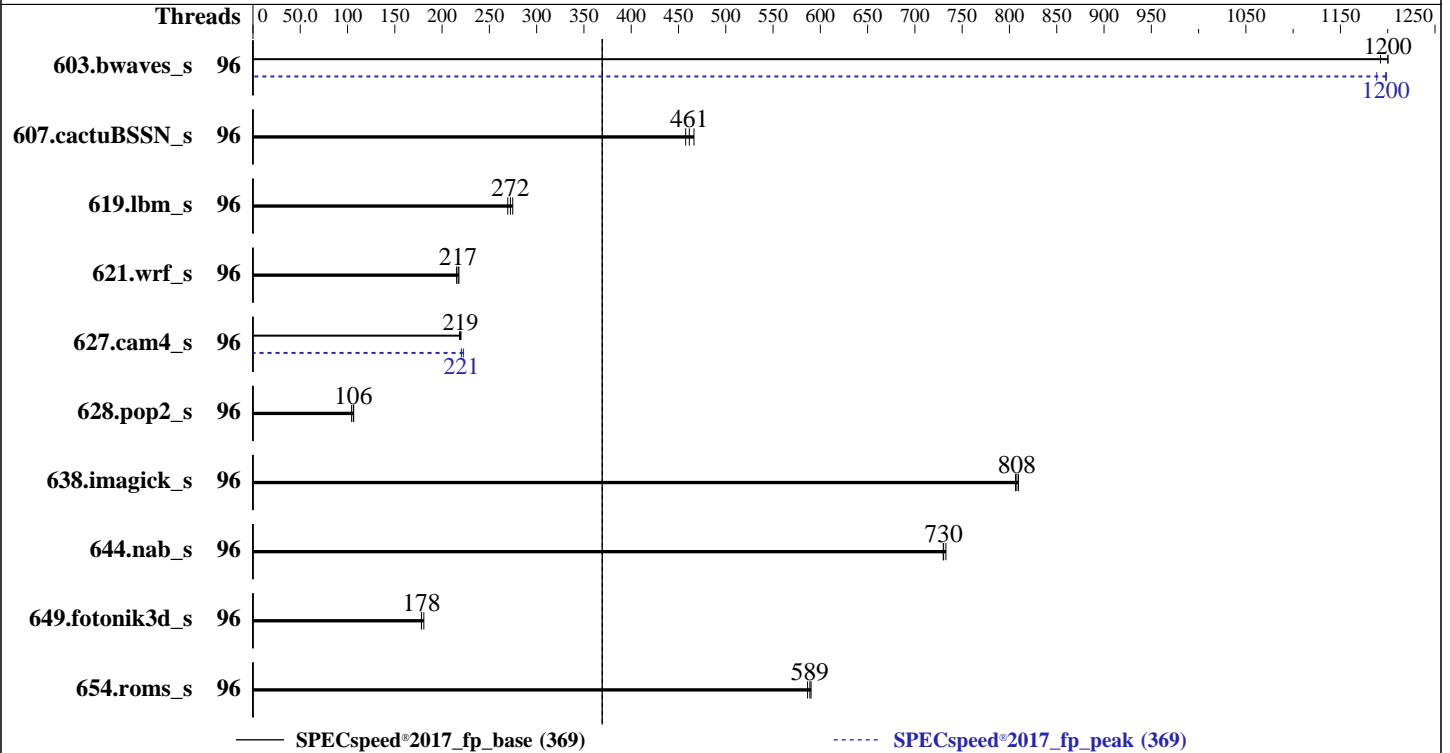

Hardware

CPU Name: Intel Xeon Platinum 8558
 Max MHz: 4000
 Nominal: 2100
 Enabled: 96 cores, 2 chips
 Orderable: 1, 2 chip(s)
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 260 MB I+D on chip per chip
 Other: None
 Memory: 512 GB (16 x 32 GB 2Rx8 PC5-5600B-R, running at 5200)
 Storage: 1 x 480 GB SATA SSD
 Other: CPU Cooling: DLC

Software

OS: SUSE Linux Enterprise Server 15 SP5
 Kernel 5.14.21-150500.53-default
 Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;
 Parallel: Yes
 Firmware: HPE BIOS Version v2.12 12/13/2023 released Dec-2023
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.10 GHz, Intel Xeon Platinum 8558)

SPECspeed®2017_fp_base = 369

SPECspeed®2017_fp_peak = 369

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2024
Hardware Availability: Feb-2024
Software Availability: Dec-2023

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	96	<u>49.2</u>	<u>1200</u>	49.5	1190	49.2	1200	96	49.6	1190	49.2	1200	<u>49.3</u>	<u>1200</u>
607.cactuBSSN_s	96	36.4	458	35.7	466	<u>36.1</u>	<u>461</u>	96	36.4	458	35.7	466	<u>36.1</u>	<u>461</u>
619.lbm_s	96	<u>19.2</u>	<u>272</u>	19.4	269	19.1	275	96	<u>19.2</u>	<u>272</u>	19.4	269	19.1	275
621.wrf_s	96	<u>61.0</u>	<u>217</u>	60.7	218	61.4	215	96	<u>61.0</u>	<u>217</u>	60.7	218	61.4	215
627.cam4_s	96	40.6	218	40.3	220	<u>40.4</u>	<u>219</u>	96	39.8	223	40.2	220	<u>40.2</u>	<u>221</u>
628.pop2_s	96	111	107	114	104	<u>112</u>	<u>106</u>	96	111	107	114	104	<u>112</u>	<u>106</u>
638.imagick_s	96	17.9	806	17.8	810	<u>17.9</u>	<u>808</u>	96	17.9	806	17.8	810	<u>17.9</u>	<u>808</u>
644.nab_s	96	23.9	730	23.8	733	<u>23.9</u>	<u>730</u>	96	23.9	730	23.8	733	<u>23.9</u>	<u>730</u>
649.fotonik3d_s	96	51.2	178	50.4	181	<u>51.1</u>	<u>178</u>	96	51.2	178	50.4	181	<u>51.1</u>	<u>178</u>
654.roms_s	96	<u>26.7</u>	<u>589</u>	26.7	590	26.8	586	96	<u>26.7</u>	<u>589</u>	26.7	590	26.8	586

SPECspeed®2017_fp_base = **369**

SPECspeed®2017_fp_peak = **369**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
tuned-adm profile was set to Throughput-Performance using "tuned-adm profile throughput-performance"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOCONF = "retain:true"
OMP_STACKSIZE = "192M"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Redhat Enterprise Linux 8.0
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.10 GHz, Intel Xeon Platinum 8558)

SPECspeed®2017_fp_base = 369

SPECspeed®2017_fp_peak = 369

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

Platform Notes

BIOS Configuration:

Workload Profile set to General Peak Frequency Compute
 Thermal Configuration set to Maximum Cooling
 Intel Hyper-Threading set to Disabled
 Memory Patrol Scrubbing set to Disabled
 Enhanced Processor Performance Profile set to Aggressive
 Dead Block Predictor set to Enabled
 Last Level Cache (LLC) Prefetch set to Enabled
 Last Level Cache (LLC) Dead Line Allocation set to Disabled
 Workload Profile set to Custom
 Adjacent Sector Prefetch set to Disabled
 Minimum Processor Idle Power Package C-State set to No Package State

Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost Tue Mar 19 10:41:51 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

1. uname -a
 Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043/lp)
 x86_64 x86_64 x86_64 GNU/Linux

2. w
 10:41:51 up 1 min, 0 users, load average: 0.38, 0.14, 0.05
 USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT

3. Username
 From environment variable \$USER: root

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.10 GHz, Intel Xeon Platinum 8558)

SPECspeed®2017_fp_base = 369

SPECspeed®2017_fp_peak = 369

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2024
Hardware Availability: Feb-2024
Software Availability: Dec-2023

Platform Notes (Continued)

```

-----
4. ulimit -a
   core file size          (blocks, -c) unlimited
   data seg size           (kbytes, -d) unlimited
   scheduling priority     (-e) 0
   file size               (blocks, -f) unlimited
   pending signals        (-i) 2062747
   max locked memory      (kbytes, -l) 64
   max memory size        (kbytes, -m) unlimited
   open files              (-n) 1024
   pipe size               (512 bytes, -p) 8
   POSIX message queues   (bytes, -q) 819200
   real-time priority     (-r) 0
   stack size             (kbytes, -s) unlimited
   cpu time                (seconds, -t) unlimited
   max user processes     (-u) 2062747
   virtual memory         (kbytes, -v) unlimited
   file locks              (-x) unlimited

```

```

-----
5. sysinfo process ancestry
   /usr/lib/systemd/systemd --switched-root --system --deserialize 29
   sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
   sshd: root@notty
   bash -c cd $SPEC/ && $SPEC/fpspeed_avx512.sh
   runcpu --nobuild --action validate --define default-platform-flags -c
     ic2023.2.3-lin-core-avx512-speed-20231121.cfg --define cores=96 --tune base,peak -o all --define
     drop_caches fpspeed
   runcpu --nobuild --action validate --define default-platform-flags --configfile
     ic2023.2.3-lin-core-avx512-speed-20231121.cfg --define cores=96 --tune base,peak --output_format all
     --define drop_caches --nopower --runmode speed --tune base:peak --size refspeed fpspeed --nopreenv
     --note-preenv --logfile $SPEC/tmp/CPU2017.001/templogs/preenv.fpspeed.001.0.log --lognum 001.0
     --from_runcpu 2
   specperl $SPEC/bin/sysinfo
   $SPEC = /home/cpu2017

```

```

-----
6. /proc/cpuinfo
   model name      : INTEL(R) XEON(R) PLATINUM 8558
   vendor_id      : GenuineIntel
   cpu family     : 6
   model          : 207
   stepping       : 2
   microcode      : 0x21000200
   bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
   cpu cores      : 48
   siblings       : 48
   2 physical ids (chips)
   96 processors (hardware threads)
   physical id 0: core ids 0-47
   physical id 1: core ids 0-47
   physical id 0: apicids
   0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
   ,74,76,78,80,82,84,86,88,90,92,94
   physical id 1: apicids
   128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,1
   80,182,184,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems. Use the above data carefully.

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.10 GHz, Intel Xeon Platinum 8558)

SPECspeed®2017_fp_base = 369

SPECspeed®2017_fp_peak = 369

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2024
Hardware Availability: Feb-2024
Software Availability: Dec-2023

Platform Notes (Continued)

7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          46 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 96
On-line CPU(s) list:   0-95
Vendor ID:              GenuineIntel
Model name:             INTEL(R) XEON(R) PLATINUM 8558
CPU family:             6
Model:                  207
Thread(s) per core:    1
Core(s) per socket:    48
Socket(s):              2
Stepping:               2
BogoMIPS:               4200.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                        sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                        lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                        invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                        vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep
                        bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                        xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                        cqm_mbm_local avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
                        avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                        avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
                        cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
                        arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities
Virtualization:         VT-x
L1d cache:              4.5 MiB (96 instances)
L1i cache:              3 MiB (96 instances)
L2 cache:               192 MiB (96 instances)
L3 cache:               520 MiB (2 instances)
NUMA node(s):          2
NUMA node0 CPU(s):     0-23,48-71
NUMA node1 CPU(s):     24-47,72-95
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:     Not affected
Vulnerability Mds:      Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSE-eIBRS SW
                        sequence
Vulnerability Srbds:    Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.10 GHz, Intel Xeon Platinum 8558)

SPECspeed®2017_fp_base = 369

SPECspeed®2017_fp_peak = 369

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2024
Hardware Availability: Feb-2024
Software Availability: Dec-2023

Platform Notes (Continued)

L1d	48K	4.5M	12 Data	1	64	1	64
L1i	32K	3M	8 Instruction	1	64	1	64
L2	2M	192M	16 Unified	2	2048	1	64
L3	260M	520M	20 Unified	3	212992	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0-23,48-71
node 0 size: 257729 MB
node 0 free: 257059 MB
node 1 cpus: 24-47,72-95
node 1 size: 257980 MB
node 1 free: 256685 MB
node distances:
node  0  1
  0:  10  20
  1:  20  10

```

9. /proc/meminfo

MemTotal: 528087388 kB

10. who -r

run-level 3 Mar 19 10:41

11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)

```

Default Target Status
multi-user      running

```

12. Services, from systemctl list-unit-files

```

STATE UNIT FILES
enabled apparmor auditd cron getty@ irqbalance issue-generator kbdsettings postfix purge-kernels
rollback sshd systemd-pstore tuned wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6
wickedd-nanny
enabled-runtime systemd-remount-fs
disabled boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell grub2-once
haveged haveged-switch-root hwloc-dump-hwdata issue-add-ssh-keys kexec-load lunmask
rpmconfigcheck serial-getty@ systemd-boot-check-no-failures systemd-network-generator
systemd-sysext systemd-time-wait-sync systemd-timesyncd
indirect pcsd wickedd

```

13. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default
root=UUID=65f8c630-625a-4316-81ef-8b2a075b341e
splash=silent
resume=/dev/disk/by-uuid/f51d909c-6cc3-417f-96c7-b77fec3ea376
mitigations=auto
quiet
security=apparmor

```

14. cpupower frequency-info

```

analyzing CPU 0:
Unable to determine current policy

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.10 GHz, Intel Xeon Platinum 8558)

SPECspeed®2017_fp_base = 369

SPECspeed®2017_fp_peak = 369

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

Platform Notes (Continued)

boost state support:

Supported: yes

Active: yes

15. tuned-adm active

Current active profile: throughput-performance

16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	20
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	10
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	0

17. /sys/kernel/mm/transparent_hugepage

defrag	always	defer	defer+madvise	[madvise]	never
enabled	[always]	madvise	never		
hpage_pmd_size	2097152				
shmem_enabled	always	within_size	advise	[never]	deny force

18. /sys/kernel/mm/transparent_hugepage/khugepaged

alloc_sleep_millisecs	60000
defrag	1
max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

19. OS release

From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP5

20. Disk information

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	xfs	351G	256G	96G	73%	/home

21. /sys/devices/virtual/dmi/id

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.10 GHz, Intel Xeon Platinum 8558)

SPECspeed®2017_fp_base = 369

SPECspeed®2017_fp_peak = 369

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

Platform Notes (Continued)

Vendor: HPE
Product: ProLiant DL360 Gen11
Product Family: ProLiant
Serial: CNX20800PW

22. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x Hynix HMC88AGBRA193N 32 GB 2 rank 5600, configured at 5200

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: HPE
BIOS Version: 2.12
BIOS Date: 12/13/2023
BIOS Revision: 2.12
Firmware Revision: 1.55

Compiler Version Notes

C | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

C++, C, Fortran | 607.cactuBSSN_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.10 GHz, Intel Xeon Platinum 8558)

SPECSpeed®2017_fp_base = 369

SPECSpeed®2017_fp_peak = 369

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

603.bwaves_s: -DSPEC_LP64

607.cactuBSSN_s: -DSPEC_LP64

619.lbm_s: -DSPEC_LP64

621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian

627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG

628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian

-assume byterecl

638.imagick_s: -DSPEC_LP64

644.nab_s: -DSPEC_LP64

649.fotonik3d_s: -DSPEC_LP64

654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math

-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp

-DSPEC_OPENMP -Wno-implicit-int -L/usr/local/jemalloc64-5.0.1/lib

-ljemalloc

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX512 -Ofast

-ffast-math -flto -mfpmath=sse -funroll-loops

-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs

-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using both Fortran and C:

-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.10 GHz, Intel Xeon Platinum 8558)

SPECspeed®2017_fp_base = 369

SPECspeed®2017_fp_peak = 369

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Peak Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.10 GHz, Intel Xeon Platinum 8558)

SPECspeed®2017_fp_base = 369

SPECspeed®2017_fp_peak = 369

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

Peak Optimization Flags (Continued)

Fortran benchmarks:

```
603.bwaves_s: -w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX512
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

649.fotonik3d_s: basepeak = yes

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf_s: basepeak = yes

```
627.cam4_s: -w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

628.pop2_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-EMR-rev1.0.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-EMR-rev1.0.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-03-19 01:11:51-0400.

Report generated on 2024-04-09 15:46:39 by CPU2017 PDF formatter v6716.

Originally published on 2024-04-09.