



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)
(Tyrone Camarero SDA200A2W-212)
(4.10 GHz, AMD EPYC 9174F)

SPECspeed®2017_fp_base = 226

SPECspeed®2017_fp_peak = 254

CPU2017 License: 6802


Test Sponsor: Netweb Technologies India Ltd

Tested by: Tyrone Systems

Test Date: Aug-2024

Hardware Availability: Jun-2023

Software Availability: Aug-2024

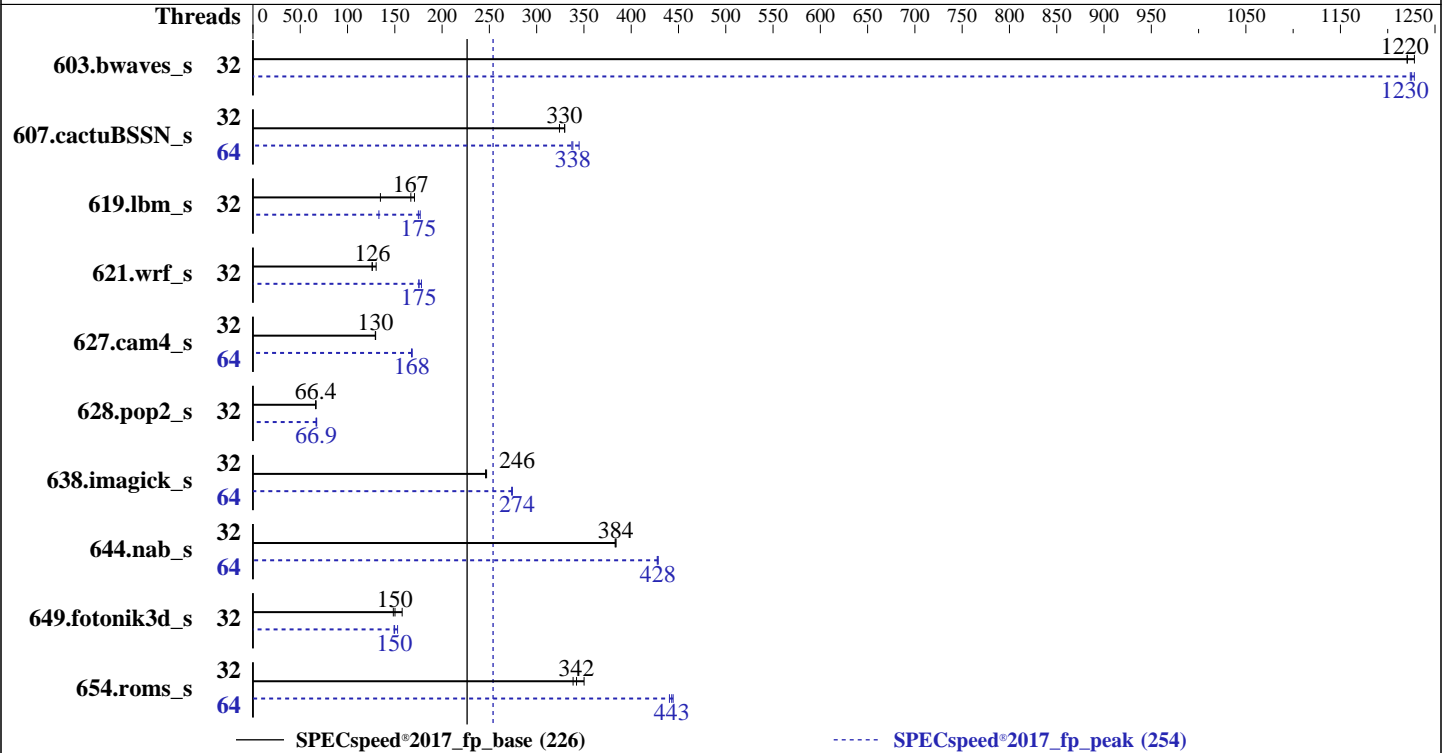

Hardware

CPU Name: AMD EPYC 9174F
 Max MHz: 4400
 Nominal: 4100
 Enabled: 32 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 256 MB I+D on chip per chip, 32 MB shared / 2 cores
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 1 x 1 TB NVMe
 Other: CPU Cooling: Air

Software

OS: Ubuntu 20.04.4 LTS
 kernel version 5.15.0-119-generic
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC
 Parallel: Yes
 Firmware: Version 1.9a released Jun-2024
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Tyrone Systems
(Test Sponsor: Netweb Technologies India Ltd)
(Tyrone Camarero SDA200A2W-212)
(4.10 GHz, AMD EPYC 9174F)

SPECSpeed®2017_fp_base = 226
SPECSpeed®2017_fp_peak = 254

CPU2017 License: 6802
Test Sponsor: Netweb Technologies India Ltd
Tested by: Tyrone Systems

Test Date: Aug-2024
Hardware Availability: Jun-2023
Software Availability: Aug-2024

Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	32	48.3	1220	<u>48.3</u>	<u>1220</u>	48.0	1230	32	48.0	1230	48.2	1220	<u>48.1</u>	<u>1230</u>
607.cactuBSSN_s	32	<u>50.6</u>	<u>330</u>	50.6	330	51.4	324	64	48.3	345	<u>49.3</u>	<u>338</u>	49.4	337
619.lbm_s	32	<u>31.4</u>	<u>167</u>	38.9	135	30.7	171	32	<u>29.9</u>	<u>175</u>	29.6	177	39.3	133
621.wrf_s	32	<u>105</u>	<u>126</u>	102	130	105	126	32	75.4	175	74.2	178	<u>75.4</u>	<u>175</u>
627.cam4_s	32	68.5	129	68.3	130	<u>68.4</u>	<u>130</u>	64	<u>52.7</u>	<u>168</u>	52.9	168	52.7	168
628.pop2_s	32	178	66.6	179	66.4	<u>179</u>	<u>66.4</u>	32	176	67.4	<u>177</u>	<u>66.9</u>	178	66.9
638.imagick_s	32	58.4	247	<u>58.6</u>	<u>246</u>	58.6	246	64	52.7	274	52.6	274	<u>52.7</u>	<u>274</u>
644.nab_s	32	45.5	384	45.6	383	<u>45.5</u>	<u>384</u>	64	40.8	428	40.9	428	<u>40.8</u>	<u>428</u>
649.fotonik3d_s	32	61.4	148	57.8	158	<u>60.7</u>	<u>150</u>	32	61.1	149	<u>60.9</u>	<u>150</u>	59.6	153
654.roms_s	32	45.0	350	<u>46.0</u>	<u>342</u>	46.5	339	64	35.7	440	35.4	444	<u>35.6</u>	<u>443</u>

SPECSpeed®2017_fp_base = **226**

SPECSpeed®2017_fp_peak = **254**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) only on request for base runs,
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To enable THP for all allocations for peak runs,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Tyrone Systems
(Test Sponsor: Netweb Technologies India Ltd)
(Tyrone Camarero SDA200A2W-212)
(4.10 GHz, AMD EPYC 9174F)

SPECspeed®2017_fp_base = 226

SPECspeed®2017_fp_peak = 254

CPU2017 License: 6802
Test Sponsor: Netweb Technologies India Ltd
Tested by: Tyrone Systems

Test Date: Aug-2024
Hardware Availability: Jun-2023
Software Availability: Aug-2024

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-63"
LD_LIBRARY_PATH = "/home/cpu2017/amd_speed_aocc400_znver4_A_lib/lib:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "oversize_threshold:0,retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "64"
```

Environment variables set by runcpu during the 603.bwaves_s peak run:
GOMP_CPU_AFFINITY = "0-31"

Environment variables set by runcpu during the 607.cactuBSSN_s peak run:
GOMP_CPU_AFFINITY = "0-63"

Environment variables set by runcpu during the 619.lbm_s peak run:
GOMP_CPU_AFFINITY = "0-31"

Environment variables set by runcpu during the 621.wrf_s peak run:
GOMP_CPU_AFFINITY = "0-31"

Environment variables set by runcpu during the 627.cam4_s peak run:
GOMP_CPU_AFFINITY = "0-63"

Environment variables set by runcpu during the 628.pop2_s peak run:
GOMP_CPU_AFFINITY = "0-31"

Environment variables set by runcpu during the 638.imagick_s peak run:
GOMP_CPU_AFFINITY = "0-63"

Environment variables set by runcpu during the 644.nab_s peak run:
GOMP_CPU_AFFINITY = "0-63"

Environment variables set by runcpu during the 649.fotonik3d_s peak run:
GOMP_CPU_AFFINITY = "0-31"
PGHPF_ZMEM = "yes"

Environment variables set by runcpu during the 654.roms_s peak run:
GOMP_CPU_AFFINITY = "0 32 1 33 2 34 3 35 4 36 5 37 6 38 7 39 8 40 9 41 10 42 11 43 12 44 13 45 14 46 15 47
16 48 17 49 18 50 19 51 20 52 21 53 22 54 23 55 24 56 25 57 26 58 27 59 28 60 29 61 30 62 31 63"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Tyrone Systems
(Test Sponsor: Netweb Technologies India Ltd)
(Tyrone Camarero SDA200A2W-212)
(4.10 GHz, AMD EPYC 9174F)

SPECspeed®2017_fp_base = 226

SPECspeed®2017_fp_peak = 254

CPU2017 License: 6802
Test Sponsor: Netweb Technologies India Ltd
Tested by: Tyrone Systems

Test Date: Aug-2024
Hardware Availability: Jun-2023
Software Availability: Aug-2024

Platform Notes

BIOS Settings:
cTDP: 400
Determinism Slider set to Power
Package Power: 400
EDC: 400
ACPI SRAT L3 Cache as NUMA Domain: enabled

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on amd2-Super-Server Sat Aug 31 09:56:23 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

- 1. uname -a
- 2. w
- 3. Username
- 4. ulimit -a
- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 245 (245.4-4ubuntu3.20)
- 12. Failed units, from systemctl list-units --state=failed
- 13. Services, from systemctl list-unit-files
- 14. Linux kernel boot-time arguments, from /proc/cmdline
- 15. sysctl
- 16. /sys/kernel/mm/transparent_hugepage
- 17. /sys/kernel/mm/transparent_hugepage/khugepaged
- 18. OS release
- 19. Disk information
- 20. /sys/devices/virtual/dmi/id
- 21. dmidecode
- 22. BIOS

1. uname -a
Linux amd2-Super-Server 5.15.0-119-generic #129~20.04.1-Ubuntu SMP Wed Aug 7 13:07:13 UTC 2024 x86_64
x86_64 x86_64 GNU/Linux

2. w
09:56:23 up 20:44, 1 user, load average: 6.04, 4.72, 2.89
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root ttyl - Fri13 2:53m 1.98s 0.62s /bin/bash ./amd_speed_aocc400_znver4_A1.sh

3. Username
From environment variable \$USER: root

4. ulimit -a
time(seconds) unlimited
file(blocks) unlimited
data(kbytes) unlimited

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)
(Tyrone Camarero SDA200A2W-212)
(4.10 GHz, AMD EPYC 9174F)

SPECspeed®2017_fp_base = 226

SPECspeed®2017_fp_peak = 254

CPU2017 License: 6802

Test Sponsor: Netweb Technologies India Ltd

Tested by: Tyrone Systems

Test Date: Aug-2024

Hardware Availability: Jun-2023

Software Availability: Aug-2024

Platform Notes (Continued)

stack(kbytes)	unlimited
coredump(blocks)	0
memory(kbytes)	unlimited
locked memory(kbytes)	2097152
process	4126730
nofiles	1024
vmemory(kbytes)	unlimited
locks	unlimited
rtprio	0

5. sysinfo process ancestry

```

/sbin/init splash
/bin/login -p --
-bash
python3 ./run_amd_speed_aocc400_znver4_A1.py
/bin/bash ./amd_speed_aocc400_znver4_A1.sh
runcpu --config amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 fpspeed
runcpu --configfile amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeed fpspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.002/templogs/preenv.fpspeed.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

```

6. /proc/cpuinfo

```

model name      : AMD EPYC 9174F 16-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model          : 17
stepping       : 1
microcode      : 0xa101148
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass rsro
TLB size      : 3584 4K pages
cpu cores     : 16
siblings      : 32
2 physical ids (chips)
64 processors (hardware threads)
physical id 0: core ids 0-1,8-9,16-17,24-25,32-33,40-41,48-49,56-57
physical id 1: core ids 0-1,8-9,16-17,24-25,32-33,40-41,48-49,56-57
physical id 0: apicids 0-3,16-19,32-35,48-51,64-67,80-83,96-99,112-115
physical id 1: apicids 128-131,144-147,160-163,176-179,192-195,208-211,224-227,240-243

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.34:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Byte Order:	Little Endian
Address sizes:	52 bits physical, 57 bits virtual
CPU(s):	64
On-line CPU(s) list:	0-63
Thread(s) per core:	2
Core(s) per socket:	16
Socket(s):	2
NUMA node(s):	8
Vendor ID:	AuthenticAMD

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)
(Tyrone Camarero SDA200A2W-212)
(4.10 GHz, AMD EPYC 9174F)

SPECspeed®2017_fp_base = 226

SPECspeed®2017_fp_peak = 254

CPU2017 License: 6802

Test Sponsor: Netweb Technologies India Ltd

Tested by: Tyrone Systems

Test Date: Aug-2024

Hardware Availability: Jun-2023

Software Availability: Aug-2024

Platform Notes (Continued)

```

CPU family:                25
Model:                     17
Model name:                AMD EPYC 9174F 16-Core Processor
Stepping:                  1
Frequency boost:           enabled
CPU MHz:                   884.114
CPU max MHz:               4408.2998
CPU min MHz:               1500.0000
BogoMIPS:                  8187.18
Virtualization:            AMD-V
L1d cache:                 1 MiB
L1i cache:                 1 MiB
L2 cache:                  32 MiB
L3 cache:                  512 MiB
NUMA node0 CPU(s):        0-3,32-35
NUMA node1 CPU(s):        4-7,36-39
NUMA node2 CPU(s):        8-11,40-43
NUMA node3 CPU(s):        12-15,44-47
NUMA node4 CPU(s):        16-19,48-51
NUMA node5 CPU(s):        20-23,52-55
NUMA node6 CPU(s):        24-27,56-59
NUMA node7 CPU(s):        28-31,60-63
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:       Not affected
Vulnerability Mds:        Not affected
Vulnerability Meltdown:   Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:   Not affected
Vulnerability Spec rstack overflow: Mitigation; safe RET
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
                          always-on; RSB filling; PBRBSB-eIBRS Not affected; BHI Not affected
Vulnerability Srbds:      Not affected
Vulnerability Tsx async abort: Not affected
Flags:                    fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                          pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                          rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid
                          aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1
                          sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                          cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                          osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                          perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single hw_pstate ssbd
                          mba ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase bmi1 avx2 smep
                          bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                          avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                          xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                          cqm_mbm_local avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd
                          amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean
                          flushbyasid decodeassists pausefilter pfthreshold avic
                          v_vmsave_vmload vgif v_spec_ctrl avx512vbmi umip pku ospke
                          avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                          avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d

```

```

From lscpu --cache:
NAME ONE-SIZE ALL-SIZE WAYS TYPE LEVEL
L1d 32K 1M 8 Data 1
L1i 32K 1M 8 Instruction 1

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Tyrone Systems
(Test Sponsor: Netweb Technologies India Ltd)
(Tyrone Camarero SDA200A2W-212)
(4.10 GHz, AMD EPYC 9174F)

SPECspeed®2017_fp_base = 226

SPECspeed®2017_fp_peak = 254

CPU2017 License: 6802
Test Sponsor: Netweb Technologies India Ltd
Tested by: Tyrone Systems

Test Date: Aug-2024
Hardware Availability: Jun-2023
Software Availability: Aug-2024

Platform Notes (Continued)

L2	1M	32M	8 Unified	2
L3	32M	512M	16 Unified	3

```

8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
available: 8 nodes (0-7)
node 0 cpus: 0-3,32-35
node 0 size: 128712 MB
node 0 free: 127873 MB
node 1 cpus: 4-7,36-39
node 1 size: 129021 MB
node 1 free: 128367 MB
node 2 cpus: 8-11,40-43
node 2 size: 129021 MB
node 2 free: 128448 MB
node 3 cpus: 12-15,44-47
node 3 size: 129021 MB
node 3 free: 128452 MB
node 4 cpus: 16-19,48-51
node 4 size: 129021 MB
node 4 free: 128770 MB
node 5 cpus: 20-23,52-55
node 5 size: 129021 MB
node 5 free: 128738 MB
node 6 cpus: 24-27,56-59
node 6 size: 128974 MB
node 6 free: 128764 MB
node 7 cpus: 28-31,60-63
node 7 size: 128974 MB
node 7 free: 128647 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10 12 12 12 32 32 32 32
1:  12 10 12 12 32 32 32 32
2:  12 12 10 12 32 32 32 32
3:  12 12 12 10 32 32 32 32
4:  32 32 32 32 10 12 12 12
5:  32 32 32 32 12 10 12 12
6:  32 32 32 32 12 12 10 12
7:  32 32 32 32 12 12 12 10

```

```

9. /proc/meminfo
MemTotal:      1056532744 kB

```

```

10. who -r
run-level 3 Aug 30 13:12

```

```

11. Systemd service manager version: systemd 245 (245.4-4ubuntu3.20)
Default Target Status
multi-user      degraded

```

```

12. Failed units, from systemctl list-units --state=failed
UNIT                                LOAD ACTIVE SUB    DESCRIPTION
* fwupd-refresh.service             loaded failed failed Refresh fwupd metadata and update motd
* NetworkManager-wait-online.service loaded failed failed Network Manager Wait Online

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)
(Tyrone Camarero SDA200A2W-212)
(4.10 GHz, AMD EPYC 9174F)

SPECspeed®2017_fp_base = 226

SPECspeed®2017_fp_peak = 254

CPU2017 License: 6802

Test Sponsor: Netweb Technologies India Ltd

Tested by: Tyrone Systems

Test Date: Aug-2024

Hardware Availability: Jun-2023

Software Availability: Aug-2024

Platform Notes (Continued)

* snapd.apparmor.service loaded failed failed Load AppArmor profiles managed internally by snapd

13. Services, from systemctl list-unit-files

```

STATE          UNIT FILES
enabled        ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
                accounts-daemon anacron apparmor autovt@ avahi-daemon bluetooth console-setup cron cups
                cups-browsed dmesg e2scrub_reap getty@ gpu-manager grub-common grub-initrd-fallback
                irqbalance kerneloops keyboard-setup network-manager networkd-dispatcher ondemand openvpn
                pppd-dns rsync rsyslog secureboot-db setvtrgb snapd ssh sshd switcheroo-control syslog
                systemd-pstore systemd-resolved systemd-timesynod thermald ua-reboot-cmds udisks2 ufw
                unattended-upgrades whoopsie wpa_supplicant
enabled-runtime netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled       acpid brltty console-getty debug-shell ipmievd openvpn-client@ openvpn-server@ openvpn@
                rtkit-daemon serial-getty@ speech-dispatcher speech-dispatcherd
                systemd-boot-check-no-failures systemd-network-generator systemd-networkd
                systemd-networkd-wait-online systemd-time-wait-sync upower wpa_supplicant-nl80211@
                wpa_supplicant-wired@ wpa_supplicant@
generated      apport ipmidrv openipmi
indirect        display-manager lightdm saned@ spice-vdagent spice-vdagentd uidd
masked         alsa-utils cryptdisks cryptdisks-early hwclock pulseaudio-enable-autospawn rc rcS saned
                sudo x11-common

```

14. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=/boot/vmlinuz-5.15.0-119-generic
root=UUID=1ae71a13-cac0-48f6-b6e6-e15e5e687f57
ro
quiet
splash
vt.handoff=7

```

15. sysctl

```

kernel.numa_balancing          1
kernel.randomize_va_space      0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  8
vm.dirty_writeback_centisecs    500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                    1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           1

```

16. /sys/kernel/mm/transparent_hugepage

```

defrag      [always] defer defer+madvise madvise never
enabled     [always] madvise never
hpage_pmd_size 2097152

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Tyrone Systems
(Test Sponsor: Netweb Technologies India Ltd)
(Tyrone Camarero SDA200A2W-212)
(4.10 GHz, AMD EPYC 9174F)

SPECspeed®2017_fp_base = 226

SPECspeed®2017_fp_peak = 254

CPU2017 License: 6802
Test Sponsor: Netweb Technologies India Ltd
Tested by: Tyrone Systems

Test Date: Aug-2024
Hardware Availability: Jun-2023
Software Availability: Aug-2024

Platform Notes (Continued)

shmem_enabled always within_size advise [never] deny force

17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

18. OS release
From /etc/*-release /etc/*-version
os-release Ubuntu 20.04.4 LTS

19. Disk information
SPEC is set to: /home/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme0n1p2 ext4 938G 21G 870G 3% /

20. /sys/devices/virtual/dmi/id
Vendor: Tyrone Systems
Product: Tyrone Camarero SDA200A2N-212
Product Family: SMC H13
Serial: 0123456789

21. dmidecode
Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
8x NO DIMM NO DIMM
16x Samsung M321R8GA0BB0-CQKZJ 64 GB 2 rank 4800

22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 1.9a
BIOS Date: 06/21/2024
BIOS Revision: 5.27

Compiler Version Notes

=====
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Tyrone Systems
(Test Sponsor: Netweb Technologies India Ltd)
(Tyrone Camarero SDA200A2W-212)
(4.10 GHz, AMD EPYC 9174F)

SPECspeed®2017_fp_base = 226
SPECspeed®2017_fp_peak = 254

CPU2017 License: 6802
Test Sponsor: Netweb Technologies India Ltd
Tested by: Tyrone Systems

Test Date: Aug-2024
Hardware Availability: Jun-2023
Software Availability: Aug-2024

Compiler Version Notes (Continued)

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====
Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====
Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

Base Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)
(Tyrone Camarero SDA200A2W-212)
(4.10 GHz, AMD EPYC 9174F)

SPECspeed®2017_fp_base = 226

SPECspeed®2017_fp_peak = 254

CPU2017 License: 6802

Test Sponsor: Netweb Technologies India Ltd

Tested by: Tyrone Systems

Test Date: Aug-2024

Hardware Availability: Jun-2023

Software Availability: Aug-2024

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-mllvm -reduce-array-computations=3 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang

Benchmarks using both Fortran and C:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang

Benchmarks using Fortran, C, and C++:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Tyrone Systems
(Test Sponsor: Netweb Technologies India Ltd)
(Tyrone Camarero SDA200A2W-212)
(4.10 GHz, AMD EPYC 9174F)

SPECspeed®2017_fp_base = 226
SPECspeed®2017_fp_peak = 254

CPU2017 License: 6802
Test Sponsor: Netweb Technologies India Ltd
Tested by: Tyrone Systems

Test Date: Aug-2024
Hardware Availability: Jun-2023
Software Availability: Aug-2024

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

Base Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Benchmarks using Fortran, C, and C++:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Peak Compiler Invocation

C benchmarks:

```
clang
```

Fortran benchmarks:

```
flang
```

Benchmarks using both Fortran and C:

```
flang clang
```

Benchmarks using Fortran, C, and C++:

```
clang++ clang flang
```



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)
(Tyrone Camarero SDA200A2W-212)
(4.10 GHz, AMD EPYC 9174F)

SPECSpeed®2017_fp_base = 226

SPECSpeed®2017_fp_peak = 254

CPU2017 License: 6802

Test Sponsor: Netweb Technologies India Ltd

Tested by: Tyrone Systems

Test Date: Aug-2024

Hardware Availability: Jun-2023

Software Availability: Aug-2024

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
619.lbm_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

638.imagick_s: Same as 619.lbm_s

```
644.nab_s: -m64 -Wl,-mllvm -Wl,-region-vectorize -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

Fortran benchmarks:

```
603.bwaves_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP
-Ofast -march=znver4 -fveclib=AMDLIBM -ffast-math
-fopenmp -Mrecursive -mllvm -reduce-array-computations=3
-fvector-transform -fscalar-transform -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang
```

```
649.fotonik3d_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP
-Ofast -march=znver4 -fveclib=AMDLIBM -ffast-math
-fopenmp -flto -Mrecursive
-mllvm -reduce-array-computations=3 -zopt -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Technologies India Ltd)
(Tyrone Camarero SDA200A2W-212)
(4.10 GHz, AMD EPYC 9174F)

SPECspeed®2017_fp_base = 226

SPECspeed®2017_fp_peak = 254

CPU2017 License: 6802

Test Sponsor: Netweb Technologies India Ltd

Tested by: Tyrone Systems

Test Date: Aug-2024

Hardware Availability: Jun-2023

Software Availability: Aug-2024

Peak Optimization Flags (Continued)

654.roms_s: Same as 603.bwaves_s

Benchmarks using both Fortran and C:

```
621.wrf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-O3 -Mrecursive -funroll-loops -mllvm -lsr-in-nested-loop
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

```
627.cam4_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-Mrecursive -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

```
628.pop2_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-Mrecursive -fvector-transform -fscalar-transform
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=9
-mllvm -unroll-threshold=50 -freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -finline-aggressive -mllvm -unroll-threshold=100
-Mrecursive -fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Tyrone Systems
(Test Sponsor: Netweb Technologies India Ltd)
(Tyrone Camarero SDA200A2W-212)
(4.10 GHz, AMD EPYC 9174F)

SPECspeed®2017_fp_base = 226

SPECspeed®2017_fp_peak = 254

CPU2017 License: 6802
Test Sponsor: Netweb Technologies India Ltd
Tested by: Tyrone Systems

Test Date: Aug-2024
Hardware Availability: Jun-2023
Software Availability: Aug-2024

Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-Genoa-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-Genoa-revD.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-08-31 00:26:23-0400.
Report generated on 2024-09-25 09:17:25 by CPU2017 PDF formatter v6716.
Originally published on 2024-09-24.