



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fusionstor
(Test Sponsor: Meganet)


SPECrate®2017_fp_base = 592

Invento i6000 (Intel Xeon Gold 6442Y)

SPECrate®2017_fp_peak = 603

CPU2017 License: 6221
Test Sponsor: Meganet
Tested by: Fusionstor system

Test Date: Dec-2024
Hardware Availability: Dec-2022
Software Availability: Dec-2023

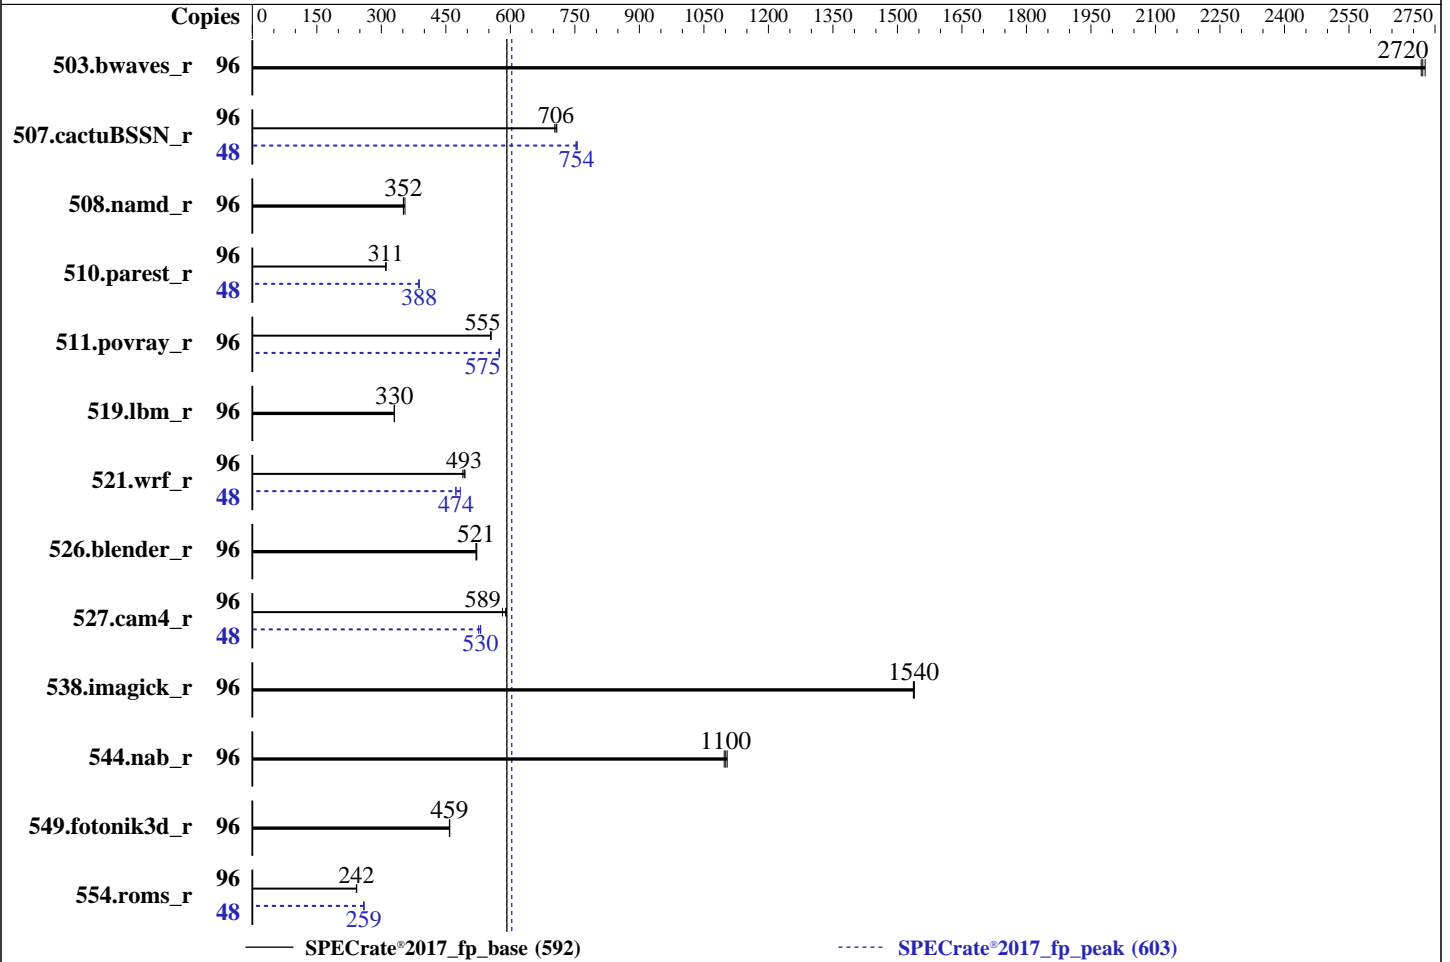

Hardware

CPU Name: Intel Xeon Gold 6442Y
 Max MHz: 4000
 Nominal: 2600
 Enabled: 48 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 60 MB I+D on chip per chip
 Other: 5 GB I+D off chip per system board
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R, running at 4400)
 Storage: 960 GB SATA SSD
 Other: CPU Cooling: Air

Software

OS: Ubuntu 22.04.5 LTS
 6.8.0-49-generic
 Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: Version EG0.10.01 released Mar-2024
 File System: ext4
 System State: Run level 5 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: OS set to prefer performance at the expense of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fusionstor
(Test Sponsor: Meganet)

SPECrate®2017_fp_base = 592

Invento i6000 (Intel Xeon Gold 6442Y)

SPECrate®2017_fp_peak = 603

CPU2017 License: 6221
Test Sponsor: Meganet
Tested by: Fusionstor system

Test Date: Dec-2024
Hardware Availability: Dec-2022
Software Availability: Dec-2023

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	96	353	2730	354	2720	354	2720	96	353	2730	354	2720	354	2720
507.cactuBSSN_r	96	172	706	172	708	173	703	48	80.6	754	80.4	755	80.7	753
508.namd_r	96	260	351	259	352	257	355	96	260	351	259	352	257	355
510.parest_r	96	808	311	809	311	810	310	48	324	388	324	387	324	388
511.povray_r	96	404	554	404	555	404	555	96	390	575	391	573	390	575
519.lbm_r	96	306	330	306	330	306	330	96	306	330	306	330	306	330
521.wrf_r	96	439	490	436	493	435	495	48	222	484	227	474	227	473
526.blender_r	96	281	521	281	521	280	522	96	281	521	281	521	280	522
527.cam4_r	96	284	590	285	589	289	582	48	158	531	158	530	160	526
538.imagick_r	96	155	1540	155	1540	155	1540	96	155	1540	155	1540	155	1540
544.nab_r	96	147	1100	147	1100	146	1100	96	147	1100	147	1100	146	1100
549.fotonik3d_r	96	816	459	815	459	816	458	96	816	459	815	459	816	458
554.roms_r	96	630	242	628	243	631	242	48	294	260	294	259	294	259

SPECrate®2017_fp_base = **592**

SPECrate®2017_fp_peak = **603**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/speccpu/cpu2017/lib/intel64:/home/speccpu/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fusionstor
(Test Sponsor: Meganet)

SPECrate®2017_fp_base = 592

Invento i6000 (Intel Xeon Gold 6442Y)

SPECrate®2017_fp_peak = 603

CPU2017 License: 6221
Test Sponsor: Meganet
Tested by: Fusionstor system

Test Date: Dec-2024
Hardware Availability: Dec-2022
Software Availability: Dec-2023

General Notes (Continued)

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

Sysinfo program /home/speccpu/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on intel Wed Dec 4 17:52:48 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

- 1. uname -a
- 2. w
- 3. Username
- 4. ulimit -a
- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.12)
- 12. Failed units, from systemctl list-units --state=failed
- 13. Services, from systemctl list-unit-files
- 14. Linux kernel boot-time arguments, from /proc/cmdline
- 15. cpupower frequency-info
- 16. sysctl
- 17. /sys/kernel/mm/transparent_hugepage
- 18. /sys/kernel/mm/transparent_hugepage/khugepaged
- 19. OS release
- 20. Disk information
- 21. /sys/devices/virtual/dmi/id
- 22. dmidecode
- 23. BIOS

```

1. uname -a
Linux intel 6.8.0-49-generic #49~22.04.1-Ubuntu SMP PREEMPT_DYNAMIC Wed Nov 6 17:42:15 UTC 2 x86_64 x86_64
x86_64 GNU/Linux

```

```

2. w
17:52:48 up 5:45, 2 users, load average: 59.21, 86.62, 92.07
USER      TTY      FROM          LOGIN@      IDLE        JCPU      PCPU      WHAT
intel    :l        :l            12:08      ?xdm?      18:35      0.00s    /usr/libexec/gdm-x-session --run-script env
GNOME_SHELL_SESSION_MODE=ubuntu /usr/bin/gnome-session --session=ubuntu
intel    pts/1    -             12:12      5:40m      0.93s     0.00s    sudo
./reportable-ic2023.2.3-lin-sapphirerapids-rate-smt-on-20231121.sh

```

```

3. Username
From environment variable $USER:  root
From the command 'logname':      intel

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fusionstor
(Test Sponsor: Meganet)

SPECrate®2017_fp_base = 592

Invento i6000 (Intel Xeon Gold 6442Y)

SPECrate®2017_fp_peak = 603

CPU2017 License: 6221
Test Sponsor: Meganet
Tested by: Fusionstor system

Test Date: Dec-2024
Hardware Availability: Dec-2022
Software Availability: Dec-2023

Platform Notes (Continued)

```
4. ulimit -a
time(seconds)          unlimited
file(blocks)           unlimited
data(kbytes)           unlimited
stack(kbytes)          unlimited
coredump(blocks)      0
memory(kbytes)         unlimited
locked memory(kbytes) 132059524
process                4126556
nofiles                1024
vmemory(kbytes)        unlimited
locks                  unlimited
rtprio                 0
```

```
-----
5. sysinfo process ancestry
/sbin/init splash
/lib/systemd/systemd --user
/usr/libexec/gnome-terminal-server
bash
sudo ./reportable-ic2023.2.3-lin-sapphirerapids-rate-smt-on-20231121.sh
sudo ./reportable-ic2023.2.3-lin-sapphirerapids-rate-smt-on-20231121.sh
sh ./reportable-ic2023.2.3-lin-sapphirerapids-rate-smt-on-20231121.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=96 -c
  ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=48 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=96 --configfile
  ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=48 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
  --runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.029/templogs/preenv.fprate.029.0.log --lognum 029.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/speccpu/cpu2017
```

```
-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Gold 6442Y
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping      : 8
microcode     : 0x2b0005c0
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb bhi
cpu cores     : 24
siblings      : 48
2 physical ids (chips)
96 processors (hardware threads)
physical id 0: core ids 0-23
physical id 1: core ids 0-23
physical id 0: apicids 0-47
physical id 1: apicids 128-175
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

```
-----
7. lscpu

From lscpu from util-linux 2.37.2:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fusionstor
(Test Sponsor: Meganet)

SPECrate®2017_fp_base = 592

Invento i6000 (Intel Xeon Gold 6442Y)

SPECrate®2017_fp_peak = 603

CPU2017 License: 6221
Test Sponsor: Meganet
Tested by: Fusionstor system

Test Date: Dec-2024
Hardware Availability: Dec-2022
Software Availability: Dec-2023

Platform Notes (Continued)

```

Address sizes:                52 bits physical, 57 bits virtual
Byte Order:                   Little Endian
CPU(s):                        96
On-line CPU(s) list:         0-95
Vendor ID:                     GenuineIntel
Model name:                   Intel(R) Xeon(R) Gold 6442Y
CPU family:                   6
Model:                        143
Thread(s) per core:          2
Core(s) per socket:          24
Socket(s):                    2
Stepping:                     8
CPU max MHz:                  4000.0000
CPU min MHz:                  800.0000
BogoMIPS:                     5200.00
Flags:                         fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                               pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                               pdpelgb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                               nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                               pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
                               pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
                               xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb
                               cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp
                               ibrs_enhanced tpr_shadow flexpriority ept vpid ept_ad fsgsbase
                               tsc_adjust bmil avx2 smep bmi2 erms invpcid cqm rdt_a avx512f
                               avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd
                               sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc
                               cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect
                               user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hfi
                               vnmi avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
                               vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                               bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
                               serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
                               amx_int8 flush_lld arch_capabilities

Virtualization:               VT-x
L1d cache:                    2.3 MiB (48 instances)
L1i cache:                    1.5 MiB (48 instances)
L2 cache:                     96 MiB (48 instances)
L3 cache:                     120 MiB (2 instances)
NUMA node(s):                 4
NUMA node0 CPU(s):            0-11,48-59
NUMA node1 CPU(s):            12-23,60-71
NUMA node2 CPU(s):            24-35,72-83
NUMA node3 CPU(s):            36-47,84-95
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:   Not affected
Vulnerability L1tf:           Not affected
Vulnerability Mds:             Not affected
Vulnerability Meltdown:       Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:       Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:      Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:      Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
                               PBRSE-eIBRS SW sequence; BHI BHI_DIS_S
Vulnerability Srbds:          Not affected
Vulnerability Tsx async abort: Not affected

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fusionstor
(Test Sponsor: Meganet)

SPECrate®2017_fp_base = 592

Invento i6000 (Intel Xeon Gold 6442Y)

SPECrate®2017_fp_peak = 603

CPU2017 License: 6221
Test Sponsor: Meganet
Tested by: Fusionstor system

Test Date: Dec-2024
Hardware Availability: Dec-2022
Software Availability: Dec-2023

Platform Notes (Continued)

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	2.3M	12	Data	1	64	1	64
L1i	32K	1.5M	8	Instruction	1	64	1	64
L2	2M	96M	16	Unified	2	2048	1	64
L3	60M	120M	15	Unified	3	65536	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-11,48-59
node 0 size: 257646 MB
node 0 free: 243144 MB
node 1 cpus: 12-23,60-71
node 1 size: 258039 MB
node 1 free: 246687 MB
node 2 cpus: 24-35,72-83
node 2 size: 258039 MB
node 2 free: 246566 MB
node 3 cpus: 36-47,84-95
node 3 size: 257989 MB
node 3 free: 246627 MB
node distances:
node  0  1  2  3
  0: 10 12 21 21
  1: 12 10 21 21
  2: 21 21 10 12
  3: 21 21 12 10

```

9. /proc/meminfo

MemTotal: 1056476196 kB

10. who -r

run-level 5 Dec 4 12:08

11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.12)

Default Target	Status
graphical	degraded

12. Failed units, from systemctl list-units --state=failed

UNIT	LOAD	ACTIVE	SUB	DESCRIPTION
* NetworkManager-wait-online.service	loaded	failed	failed	Network Manager Wait Online

13. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon anacron anydesk apparmor avahi-daemon bluetooth console-setup cron cups cups-browsed dmesg e2scrub_reap getty@ gpu-manager grub-common grub-initrd-fallback irqbalance kerneloops keyboard-setup networkd-dispatcher openvpn power-profiles-daemon rsyslog secureboot-db setvtrgb snapd ssh switcheroo-control systemd-oom systemd-pstore systemd-resolved systemd-timesyncd teamviewerd thermald ua-reboot-cmds ubuntu-advantage udisks2 ufw unattended-upgrades wpa_supplicant
enabled-runtime	netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled	acpid brltty console-getty debug-shell nftables openvpn-client@ openvpn-server@ openvpn@

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fusionstor
(Test Sponsor: Meganet)

SPECrate®2017_fp_base = 592

Invento i6000 (Intel Xeon Gold 6442Y)

SPECrate®2017_fp_peak = 603

CPU2017 License: 6221
Test Sponsor: Meganet
Tested by: Fusionstor system

Test Date: Dec-2024
Hardware Availability: Dec-2022
Software Availability: Dec-2023

Platform Notes (Continued)

```

rsync rtkit-daemon serial-getty@ speech-dispatcherd systemd-boot-check-no-failures
systemd-network-generator systemd-networkd systemd-networkd-wait-online systemd-sysext
systemd-time-wait-sync tlp upower wpa_supplicant-nl80211@ wpa_supplicant-wired@
wpa_supplicant@
generated          apport cpufrequtils loadcpufreq speech-dispatcher
indirect           saned@ spice-vdagentd uidd
masked            als-utils cryptdisks cryptdisks-early hwclock pulseaudio-enable-autospawn rc rcS saned
screen-cleanup sudo systemd-rfkill x11-common

```

```

-----
14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.8.0-49-generic
root=UUID=073562bb-1438-42b9-adfa-6a6f7f3d3559
ro
quiet
splash
vt.handoff=7

```

```

-----
15. cpupower frequency-info
analyzing CPU 20:
  current policy: frequency should be within 800 MHz and 4.00 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.
boost state support:
  Supported: yes
  Active: yes

```

```

-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space     2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                  60
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          0

```

```

-----
17. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvise [madvise] never
enabled        always [madvise] never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force

```

```

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fusionstor
(Test Sponsor: Meganet)

SPECrate®2017_fp_base = 592

Invento i6000 (Intel Xeon Gold 6442Y)

SPECrate®2017_fp_peak = 603

CPU2017 License: 6221
Test Sponsor: Meganet
Tested by: Fusionstor system

Test Date: Dec-2024
Hardware Availability: Dec-2022
Software Availability: Dec-2023

Platform Notes (Continued)

```
defrag                1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs  10000
```

19. OS release
From /etc/*-release /etc/*-version
os-release Ubuntu 22.04.5 LTS

20. Disk information
SPEC is set to: /home/speccpu/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda2 ext4 879G 684G 151G 82% /

21. /sys/devices/virtual/dmi/id
Vendor: Fusionstor
Product: Invento_i6000
Product Family: SG_Intel_EagleStream
Serial: HQ3110001BDA03CD0002

22. dmidecode
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
16x NO DIMM NO DIMM
16x Samsung M321R8GA0BB0-CQKZJ 64 GB 2 rank 4800, configured at 4400

23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: American Megatrends International, LLC.
BIOS Version: EGO.10.01
BIOS Date: 03/22/2024
BIOS Revision: 5.32

Compiler Version Notes

=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fusionstor
(Test Sponsor: Meganet)

SPECrate®2017_fp_base = 592

Invento i6000 (Intel Xeon Gold 6442Y)

SPECrate®2017_fp_peak = 603

CPU2017 License: 6221
Test Sponsor: Meganet
Tested by: Fusionstor system

Test Date: Dec-2024
Hardware Availability: Dec-2022
Software Availability: Dec-2023

Compiler Version Notes (Continued)

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fusionstor
(Test Sponsor: Meganet)

SPECrate®2017_fp_base = 592

Invento i6000 (Intel Xeon Gold 6442Y)

SPECrate®2017_fp_peak = 603

CPU2017 License: 6221
Test Sponsor: Meganet
Tested by: Fusionstor system

Test Date: Dec-2024
Hardware Availability: Dec-2022
Software Availability: Dec-2023

Base Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fusionstor
(Test Sponsor: Meganet)

SPECrate®2017_fp_base = 592

Invento i6000 (Intel Xeon Gold 6442Y)

SPECrate®2017_fp_peak = 603

CPU2017 License: 6221
Test Sponsor: Meganet
Tested by: Fusionstor system

Test Date: Dec-2024
Hardware Availability: Dec-2022
Software Availability: Dec-2023

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapfirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapfirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Peak Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fusionstor
(Test Sponsor: Meganet)

SPECrate®2017_fp_base = 592

Invento i6000 (Intel Xeon Gold 6442Y)

SPECrate®2017_fp_peak = 603

CPU2017 License: 6221
Test Sponsor: Meganet
Tested by: Fusionstor system

Test Date: Dec-2024
Hardware Availability: Dec-2022
Software Availability: Dec-2023

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes
538.imagick_r: basepeak = yes
544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes
510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: basepeak = yes
549.fotonik3d_r: basepeak = yes
554.roms_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:

511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1) -fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1) -flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fusionstor
(Test Sponsor: Meganet)

SPECrate®2017_fp_base = 592

Invento i6000 (Intel Xeon Gold 6442Y)

SPECrate®2017_fp_peak = 603

CPU2017 License: 6221
Test Sponsor: Meganet
Tested by: Fusionstor system

Test Date: Dec-2024
Hardware Availability: Dec-2022
Software Availability: Dec-2023

Peak Optimization Flags (Continued)

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Fusionstor-Platform-Flags-Intel-ICX-rev6.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Fusionstor-Platform-Flags-Intel-ICX-rev6.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-12-04 07:22:48-0500.

Report generated on 2025-03-12 10:24:47 by CPU2017 PDF formatter v6716.

Originally published on 2025-03-11.