



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant MicroServer Gen11
(3.50 GHz, Intel Xeon 6325P)

SPECrate®2017_fp_base = 75.8

SPECrate®2017_fp_peak = 78.5

CPU2017 License: 3


Test Date: Jan-2025

Test Sponsor: HPE

Hardware Availability: Mar-2025

Tested by: HPE

Software Availability: Apr-2024

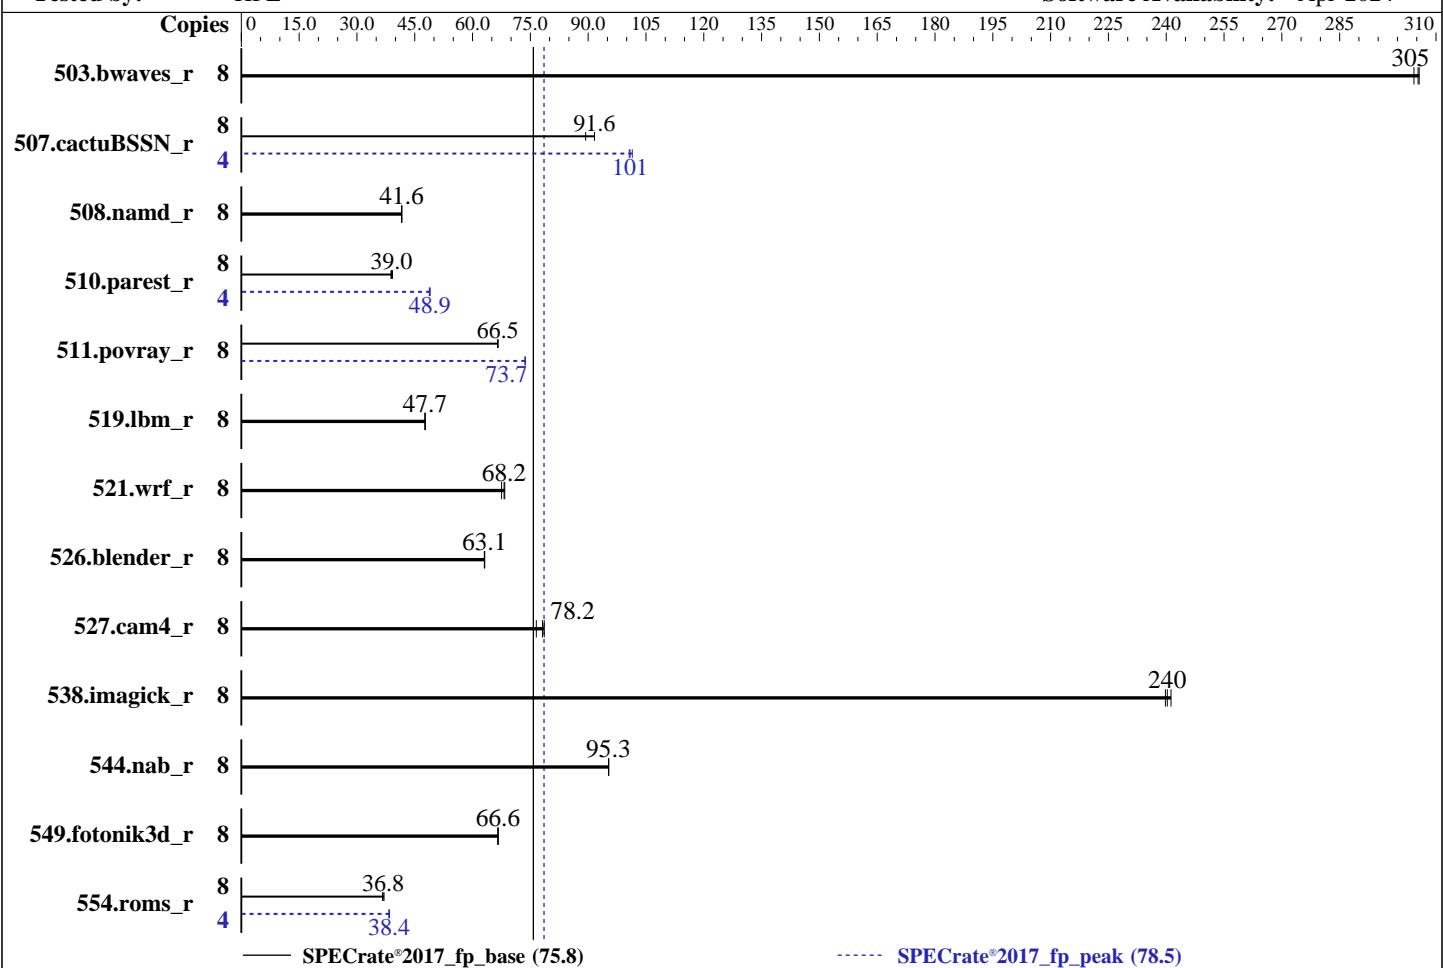

Hardware

CPU Name: Intel Xeon 6325P
Max MHz: 5200
Nominal: 3500
Enabled: 4 cores, 1 chip, 2 threads/core
Orderable: 1 Chip
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 12 MB I+D on chip per chip
Other: None
Memory: 64 GB (2 x 32 GB 2Rx8 PC5-5600B-E, running at 4400 , orderable using HPE part# P64339-B21)
Storage: 1 x 1 TB 7.2 K SATA HDD
Other: CPU Cooling: Air

OS:

Red Hat Enterprise Linux 9.4 (Plow)

Compiler:

Kernel 5.14.0-427.13.1.el9_4.x86_64

C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;

Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;

No

Parallel:

HPE BIOS Version v2.10 12/06/2024 released Dec-2024

Firmware:

xfs

File System:

Run level 3 (multi-user)

System State:

64-bit

Base Pointers:

64-bit

Peak Pointers:

64-bit

Other:

jemalloc memory allocator V5.0.1

Power Management: BIOS and OS set to prefer performance at the cost of additional power usage

Software



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant MicroServer Gen11
(3.50 GHz, Intel Xeon 6325P)

SPECrate®2017_fp_base = 75.8

SPECrate®2017_fp_peak = 78.5

CPU2017 License: 3

Test Date: Jan-2025

Test Sponsor: HPE

Hardware Availability: Mar-2025

Tested by: HPE

Software Availability: Apr-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	8	264	304	262	306	263	305	8	264	304	262	306	263	305
507.cactuBSSN_r	8	111	91.6	113	89.4	111	91.6	4	50.2	101	50.3	101	49.9	101
508.namd_r	8	183	41.6	183	41.6	183	41.6	8	183	41.6	183	41.6	183	41.6
510.parest_r	8	537	39.0	534	39.2	539	38.8	4	214	49.0	214	48.9	215	48.8
511.povray_r	8	280	66.6	281	66.5	281	66.5	8	254	73.7	254	73.7	254	73.6
519.lbm_r	8	177	47.7	177	47.7	177	47.7	8	177	47.7	177	47.7	177	47.7
521.wrf_r	8	262	68.4	263	68.2	265	67.5	8	262	68.4	263	68.2	265	67.5
526.blender_r	8	193	63.2	193	63.1	193	63.1	8	193	63.2	193	63.1	193	63.1
527.cam4_r	8	183	76.5	179	78.2	178	78.6	8	183	76.5	179	78.2	178	78.6
538.imagick_r	8	82.5	241	82.8	240	83.0	240	8	82.5	241	82.8	240	83.0	240
544.nab_r	8	141	95.4	141	95.3	141	95.3	8	141	95.4	141	95.3	141	95.3
549.fotonik3d_r	8	468	66.6	468	66.6	468	66.6	8	468	66.6	468	66.6	468	66.6
554.roms_r	8	346	36.8	347	36.6	343	37.0	4	165	38.5	166	38.4	166	38.3

SPECrate®2017_fp_base = 75.8

SPECrate®2017_fp_peak = 78.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor.
For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
tuned-adm profile was set to throughput-performance using "tuned-adm profile throughput-performance"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant MicroServer Gen11
(3.50 GHz, Intel Xeon 6325P)

SPECrate®2017_fp_base = 75.8

SPECrate®2017_fp_peak = 78.5

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2025

Hardware Availability: Mar-2025

Software Availability: Apr-2024

General Notes (Continued)

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Configuration:

Workload Profile set to General Throughput Compute
Thermal Configuration set to Maximum Cooling
Enhanced Processor Performance Profile set to Enabled
Workload Profile set to Custom
Minimum Processor Idle Power Package C-State set to Package C6 (non-retention) State

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Wed Jan 22 11:57:37 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-32.el9_4)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. tuned-adm active
17. sysctl
18. /sys/kernel/mm/transparent_hugepage
19. /sys/kernel/mm/transparent_hugepage/khugepaged
20. OS release
21. Disk information
22. /sys/devices/virtual/dmi/id
23. dmidecode
24. BIOS

1. uname -a
Linux localhost.localdomain 5.14.0-427.13.1.el9_4.x86_64 #1 SMP PREEMPT_DYNAMIC Wed Apr 10 10:29:16 EDT
2024 x86_64 x86_64 x86_64 GNU/Linux

2. w
11:57:37 up 3 min, 1 user, load average: 0.10, 0.08, 0.03
USER TTY LOGIN@ IDLE JCPU PCPU WHAT
root pts/0 11:56 9.00s 0.64s 0.00s -bash

3. Username

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant MicroServer Gen11
(3.50 GHz, Intel Xeon 6325P)

SPECrate®2017_fp_base = 75.8

SPECrate®2017_fp_peak = 78.5

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2025

Hardware Availability: Mar-2025

Software Availability: Apr-2024

Platform Notes (Continued)

From environment variable \$USER: root

```
4. ulimit -a
real-time non-blocking time  (microseconds, -R) unlimited
core file size                (blocks, -c) 0
data seg size                 (kbytes, -d) unlimited
scheduling priority           (-e) 0
file size                     (blocks, -f) unlimited
pending signals               (-i) 256647
max locked memory             (kbytes, -l) 8192
max memory size               (kbytes, -m) unlimited
open files                    (-n) 1024
pipe size                     (512 bytes, -p) 8
POSIX message queues          (bytes, -q) 819200
real-time priority             (-r) 0
stack size                     (kbytes, -s) unlimited
cpu time                      (seconds, -t) unlimited
max user processes             (-u) 256647
virtual memory                 (kbytes, -v) unlimited
file locks                    (-x) unlimited
```

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 31
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@pts/0
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=8 -c
  ic2024.1-lin-core-avx2-rate-20240308.cfg --define smt-on --define cores=4 --define physicalfirst --define
  no-numa --tune base,peak -o all --define drop_caches fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=8 --configfile
  ic2024.1-lin-core-avx2-rate-20240308.cfg --define smt-on --define cores=4 --define physicalfirst --define
  no-numa --tune base,peak --output_format all --define drop_caches --nopower --runmode rate --tune
  base:peak --size refrate fprate --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.005/templogs/preenv.fprate.005.0.log --lognum 005.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

```
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) 6325P
vendor_id       : GenuineIntel
cpu family     : 6
model          : 183
stepping        : 1
microcode       : 0x12c
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrp_brs
cpu cores       : 4
siblings        : 8
1 physical ids (chips)
8 processors (hardware threads)
physical id 0: core ids 0-3
physical id 0: apicids 0-7
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant MicroServer Gen11
(3.50 GHz, Intel Xeon 6325P)

SPECrate®2017_fp_base = 75.8

SPECrate®2017_fp_peak = 78.5

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2025

Hardware Availability: Mar-2025

Software Availability: Apr-2024

Platform Notes (Continued)

7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):       32-bit, 64-bit
Address sizes:        46 bits physical, 48 bits virtual
Byte Order:           Little Endian
CPU(s):               8
On-line CPU(s) list: 0-7
Vendor ID:            GenuineIntel
BIOS Vendor ID:      Intel(R) Corporation
Model name:           Intel(R) Xeon(R) 6325P
BIOS Model name:     Intel(R) Xeon(R) 6325P
CPU family:           6
Model:                183
Thread(s) per core:  2
Core(s) per socket:  4
Socket(s):            1
Stepping:             1
BogoMIPS:             6988.80
Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                      clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb
                      rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl
                      xtopology nonstop_tsc cpuid aperf mperf tsc_known_freq pni pclmulqdq
                      dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
                      sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
                      rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb ssbd ibrs ibpb stibp
                      ibrs_enhanced tpr_shadow flexpriority ept vpid ept_ad fsgsbase
                      tsc_adjust bmi1 avx2 smep bmi2 erms invpcid rdseed adx smap clflushopt
                      clwb intel_pt sha_ni xsaveopt xsavec xgetbv1 xsaves split_lock_detect
                      avx_vnni dtherm ida arat pln pts hfi vnmi umip pku ospke waitpkg gfni
                      vaes vpclmulqdq tme rdpid movdir64b fsrm md_clear serialize
                      pconfig arch_lbr ibt flush_l1d arch_capabilities
Virtualization:       VT-x
L1d cache:            192 KiB (4 instances)
L1i cache:            128 KiB (4 instances)
L2 cache:             8 MiB (4 instances)
L3 cache:             12 MiB (1 instance)
NUMA node(s):         1
NUMA node0 CPU(s):   0-7
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:    Not affected
Vulnerability Mds:    Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation: Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:  Mitigation: usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:  Mitigation: Enhanced / Automatic IBRS, IBPB conditional, RSB filling,
                           PBRSB-eIBRS SW sequence
Vulnerability Srbds:   Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	192K	12	Data	1	64	1	64
L1i	32K	128K	8	Instruction	1	64	1	64
L2	2M	8M	16	Unified	2	2048	1	64

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant MicroServer Gen11
(3.50 GHz, Intel Xeon 6325P)

SPECrate®2017_fp_base = 75.8

SPECrate®2017_fp_peak = 78.5

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2025

Hardware Availability: Mar-2025

Software Availability: Apr-2024

Platform Notes (Continued)

L3 12M 12M 6 Unified 3 32768 1 64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.
available: 1 nodes (0)
node 0 cpus: 0-7
node 0 size: 64203 MB
node 0 free: 63568 MB
node distances:
node 0
 0: 10

9. /proc/meminfo

MemTotal: 65744716 kB

10. who -r
run-level 3 Jan 22 11:54

11. Systemd service manager version: systemd 252 (252-32.el9_4)

Default Target Status
multi-user degraded

12. Failed units, from systemctl list-units --state=failed

UNIT	LOAD	ACTIVE	SUB	DESCRIPTION
* NetworkManager-wait-online.service	loaded	failed	failed	Network Manager Wait Online

13. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd crond dbus-broker firewalld getty@ insights-client-boot irqbalance kdump lvm2-monitor mdmonitor microcode nis-domainname rhsmcertd rsyslog selinux-autorelabel-mark sshd sssd systemd-boot-update systemd-network-generator tuned udisks2
enabled-runtime	systemd-remount-fs
disabled	blk-availability console-getty cpupower debug-shell dnf-system-upgrade hwloc-dump-hwdata kvm_stat man-db-restart-cache-update nftables powertop rdisc rhcd rhsm rhsm-facts rpmbuild rebuild selinux-check-proper-disable serial-getty@ sshd-keygen@ systemd-boot-check-no-failures systemd-pstore systemd-sysext
indirect	sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate systemd-sysupdate-reboot

14. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-427.13.1.el9_4.x86_64
root=/dev/mapper/rhel00-root
ro
resume=/dev/mapper/rhel00-swap
rd.lvm.lv=rhel00/root
rd.lvm.lv=rhel00/swap

15. cpupower frequency-info

analyzing CPU 6:
 Unable to determine current policy
 boost state support:

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant MicroServer Gen11
(3.50 GHz, Intel Xeon 6325P)

SPECrate®2017_fp_base = 75.8

SPECrate®2017_fp_peak = 78.5

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2025

Hardware Availability: Mar-2025

Software Availability: Apr-2024

Platform Notes (Continued)

Supported: yes

Active: yes

16. tuned-adm active

Current active profile: throughput-performance

17. sysctl

kernel.numa_balancing	0
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	40
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	10
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	0

18. /sys/kernel/mm/transparent_hugepage

defrag	always defer defer+madvise [madvise] never
enabled	[always] madvise never
hugepage_pmd_size	2097152
shmem_enabled	always within_size advise [never] deny force

19. /sys/kernel/mm/transparent_hugepage/khugepaged

alloc_sleep_millisecs	60000
defrag	1
max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

20. OS release

From /etc/*-release /etc/*-version	
os-release	Red Hat Enterprise Linux 9.4 (Plow)
redhat-release	Red Hat Enterprise Linux release 9.4 (Plow)
system-release	Red Hat Enterprise Linux release 9.4 (Plow)

21. Disk information

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel00-home	xfs	829G	53G	776G	7%	/home

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant MicroServer Gen11
(3.50 GHz, Intel Xeon 6325P)

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

SPECrate®2017_fp_base = 75.8

SPECrate®2017_fp_peak = 78.5

Test Date: Jan-2025

Hardware Availability: Mar-2025

Software Availability: Apr-2024

Platform Notes (Continued)

22. /sys/devices/virtual/dmi/id

Vendor: HPE
Product: ProLiant MicroServer Gen11
Product Family: ProLiant
Serial: 91ZV86L0HM

23. dmidecode

Additional information from dmidecode 3.5 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

2x Hynix HMCG88AGBEA084N 32 GB 2 rank 5600, configured at 4400

24. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: HPE
BIOS Version: 2.10
BIOS Date: 12/06/2024
BIOS Revision: 2.10
Firmware Revision: 1.67

Compiler Version Notes

=====

C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

=====

C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

=====

C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

=====

C++, C, Fortran | 507.cactusBSSN_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant MicroServer Gen11
(3.50 GHz, Intel Xeon 6325P)

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

SPECrate®2017_fp_base = 75.8

SPECrate®2017_fp_peak = 78.5

Test Date: Jan-2025

Hardware Availability: Mar-2025

Software Availability: Apr-2024

Compiler Version Notes (Continued)

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant MicroServer Gen11
(3.50 GHz, Intel Xeon 6325P)

SPECrate®2017_fp_base = 75.8

SPECrate®2017_fp_peak = 78.5

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2025

Hardware Availability: Mar-2025

Software Availability: Apr-2024

Base Portability Flags (Continued)

```
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -nostandard-realloc-lhs -align array32byte -auto
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant MicroServer Gen11
(3.50 GHz, Intel Xeon 6325P)

SPECrate®2017_fp_base = 75.8

SPECrate®2017_fp_peak = 78.5

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2025

Hardware Availability: Mar-2025

Software Availability: Apr-2024

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast
-ffast-math -futo -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant MicroServer Gen11
(3.50 GHz, Intel Xeon 6325P)

SPECrate®2017_fp_base = 75.8

SPECrate®2017_fp_peak = 78.5

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2025

Hardware Availability: Mar-2025

Software Availability: Apr-2024

Peak Optimization Flags (Continued)

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

```
554.roms_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

521.wrf_r: basepeak = yes

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2 -flto
-Ofast -ffast-math -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-GNR-rev1.1.html>
<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-GNR-rev1.1.xml>
<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant MicroServer Gen11
(3.50 GHz, Intel Xeon 6325P)

SPECrate®2017_fp_base = 75.8

SPECrate®2017_fp_peak = 78.5

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2025

Hardware Availability: Mar-2025

Software Availability: Apr-2024

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-01-22 01:27:36-0500.

Report generated on 2025-02-25 19:04:31 by CPU2017 PDF formatter v6716.

Originally published on 2025-02-25.