



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR655 V3  
(3.15 GHz, AMD EPYC 9455)

SPECrate®2017\_fp\_base = 740

SPECrate®2017\_fp\_peak = 779

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Feb-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

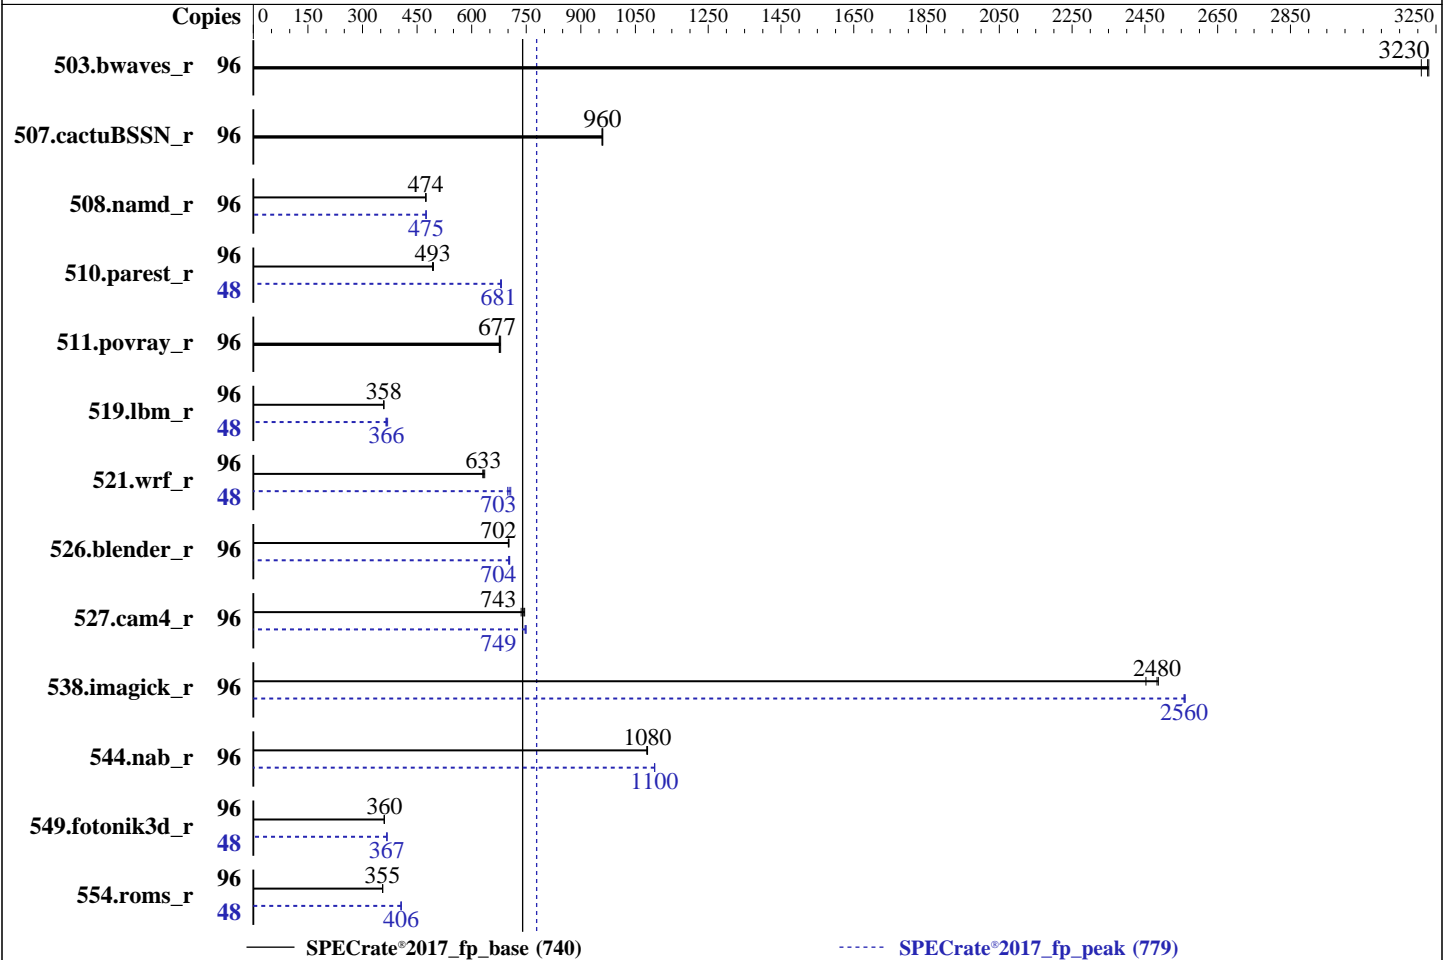

### Hardware

CPU Name: AMD EPYC 9455  
 Max MHz: 4400  
 Nominal: 3150  
 Enabled: 48 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 256 MB I+D on chip per chip,  
 32 MB shared / 6 cores  
 Other: None  
 Memory: 384 GB (12 x 32 GB 2Rx8 PC5-6400B-R, running at 6000)  
 Storage: 1 x 480 GB SATA SSD  
 Other: CPU Cooling: Air

### Software

OS: SUSE Linux Enterprise Server 15 SP6  
 Kernel 6.4.0-150600.21-default  
 Compiler: C/C++/Fortran: Version 5.0.0 of AOCC  
 Parallel: No  
 Firmware: Lenovo BIOS Version KAE131I 5.30 released Dec-2024  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR655 V3  
(3.15 GHz, AMD EPYC 9455)

SPECrate®2017\_fp\_base = 740

SPECrate®2017\_fp\_peak = 779

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Feb-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	96	298	3230	<b><u>298</u></b>	<b><u>3230</u></b>	300	3210	96	298	3230	<b><u>298</u></b>	<b><u>3230</u></b>	300	3210
507.cactuBSSN_r	96	<b><u>127</u></b>	<b><u>960</u></b>	127	958	127	960	96	<b><u>127</u></b>	<b><u>960</u></b>	127	958	127	960
508.namd_r	96	192	475	<b><u>192</u></b>	<b><u>474</u></b>	193	474	96	<b><u>192</u></b>	<b><u>475</u></b>	192	475	192	474
510.parest_r	96	507	495	510	492	<b><u>509</u></b>	<b><u>493</u></b>	48	184	682	<b><u>184</u></b>	<b><u>681</u></b>	185	680
511.povray_r	96	330	680	<b><u>331</u></b>	<b><u>677</u></b>	332	676	96	330	680	<b><u>331</u></b>	<b><u>677</u></b>	332	676
519.lbm_r	96	<b><u>282</u></b>	<b><u>358</u></b>	282	359	282	358	48	139	365	137	369	<b><u>138</u></b>	<b><u>366</u></b>
521.wrf_r	96	338	636	<b><u>340</u></b>	<b><u>633</u></b>	341	631	48	<b><u>153</u></b>	<b><u>703</u></b>	152	707	154	699
526.blender_r	96	209	701	<b><u>208</u></b>	<b><u>702</u></b>	208	702	96	208	701	208	705	<b><u>208</u></b>	<b><u>704</u></b>
527.cam4_r	96	225	746	228	736	<b><u>226</u></b>	<b><u>743</u></b>	96	225	747	224	749	<b><u>224</u></b>	<b><u>749</u></b>
538.imagick_r	96	97.3	2450	96.0	2490	<b><u>96.1</u></b>	<b><u>2480</u></b>	96	<b><u>93.3</u></b>	<b><u>2560</u></b>	93.2	2560	93.3	2560
544.nab_r	96	<b><u>149</u></b>	<b><u>1080</u></b>	149	1080	149	1080	96	<b><u>147</u></b>	<b><u>1100</u></b>	146	1100	147	1100
549.fotonik3d_r	96	1039	360	1041	359	<b><u>1039</u></b>	<b><u>360</u></b>	48	<b><u>509</u></b>	<b><u>367</u></b>	510	367	509	367
554.roms_r	96	430	355	429	356	<b><u>429</u></b>	<b><u>355</u></b>	48	188	406	<b><u>188</u></b>	<b><u>406</u></b>	188	407

SPECrate®2017\_fp\_base = **740**

SPECrate®2017\_fp\_peak = **779**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations:

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR655 V3  
(3.15 GHz, AMD EPYC 9455)

SPECrate®2017\_fp\_base = 740

SPECrate®2017\_fp\_peak = 779

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Feb-2025

**Hardware Availability:** Feb-2025

**Software Availability:** Oct-2024

## Operating System Notes (Continued)

```
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
"/home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2/amd_rate_aocc500_znver5_A_lib/lib:/home/cpu2017-1.1.9-amd
-aocc500_znver5_A1.2/amd_rate_aocc500_znver5_A_lib/lib32:"
MALLOC_CONF = "retain:true"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance

NUMA Nodes per Socket set to NPS4

L1 Stride Prefetcher set to Disabled

Sysinfo program /home/cpu2017-1.1.9-amd-aocc500\_znver5\_A1.2/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Thu Feb 6 05:16:57 2025

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent\_hugepage

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR655 V3  
(3.15 GHz, AMD EPYC 9455)

SPECrate®2017\_fp\_base = 740

SPECrate®2017\_fp\_peak = 779

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Feb-2025  
**Hardware Availability:** Feb-2025  
**Software Availability:** Oct-2024

### Platform Notes (Continued)

17. /sys/kernel/mm/transparent\_hugepage/khugepaged  
18. OS release  
19. Disk information  
20. /sys/devices/virtual/dmi/id  
21. dmidecode  
22. BIOS

1. uname -a  
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT\_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)  
x86\_64 x86\_64 x86\_64 GNU/Linux

2. w  
05:16:57 up 3 min, 1 user, load average: 0.04, 0.13, 0.07  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT

3. Username  
From environment variable \$USER: root

4. ulimit -a  
core file size (blocks, -c) unlimited  
data seg size (kbytes, -d) unlimited  
scheduling priority (-e) 0  
file size (blocks, -f) unlimited  
pending signals (-i) 1545976  
max locked memory (kbytes, -l) 2097152  
max memory size (kbytes, -m) unlimited  
open files (-n) 1024  
pipe size (512 bytes, -p) 8  
POSIX message queues (bytes, -q) 819200  
real-time priority (-r) 0  
stack size (kbytes, -s) unlimited  
cpu time (seconds, -t) unlimited  
max user processes (-u) 1545976  
virtual memory (kbytes, -v) unlimited  
file locks (-x) unlimited

5. sysinfo process ancestry  
/usr/lib/systemd/systemd --switched-root --system --deserialize=42  
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups  
sshd: root [priv]  
sshd: root@notty  
/bin/bash ./02.remote\_local\_SPECcpu\_1.01.sh  
/bin/bash ./Run026-compliant-amd-ratefp.sh  
python3 ./run\_amd\_rate\_aocc500\_znver5\_A1.py  
/bin/bash ./amd\_rate\_aocc500\_znver5\_A1.sh  
runcpu --config amd\_rate\_aocc500\_znver5\_A1.cfg --tune all --reportable --iterations 3 fprate  
runcpu --configfile amd\_rate\_aocc500\_znver5\_A1.cfg --tune all --reportable --iterations 3 --nopower  
--runmode rate --tune base:peak --size test:train:refrate fprate --nopreenv --note-preenv --logfile  
\$SPEC/tmp/CPU2017.227/templogs/preenv.fprate.227.0.log --lognum 227.0 --from\_runcpu 2  
specperl \$SPEC/bin/sysinfo  
\$SPEC = /home/cpu2017-1.1.9-amd-aocc500\_znver5\_A1.2

6. /proc/cpuinfo

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR655 V3  
(3.15 GHz, AMD EPYC 9455)

SPECrate®2017\_fp\_base = 740

SPECrate®2017\_fp\_peak = 779

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Feb-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

### Platform Notes (Continued)

```

model name      : AMD EPYC 9455 48-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 26
model          : 2
stepping       : 1
microcode      : 0xb00211a
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size       : 192 4K pages
cpu cores      : 48
siblings       : 96
1 physical ids (chips)
96 processors (hardware threads)
physical id 0: core ids 0-5,8-13,16-21,24-29,32-37,40-45,48-53,56-61
physical id 0: apicids 0-11,16-27,32-43,48-59,64-75,80-91,96-107,112-123

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

-----  
7. lscpu

From lscpu from util-linux 2.39.3:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                96
On-line CPU(s) list:  0-95
Vendor ID:             AuthenticAMD
BIOS Vendor ID:       Advanced Micro Devices, Inc.
Model name:            AMD EPYC 9455 48-Core Processor
BIOS Model name:      AMD EPYC 9455 48-Core Processor
BIOS CPU family:      107
CPU family:            26
Model:                 2
Thread(s) per core:   2
Core(s) per socket:   48
Socket(s):             1
Stepping:              1
BogoMIPS:              6290.27
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
xsaveerptr rdpru wbinvd amd_ppin cppc arat npt lbrv svm_lock
nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi
avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg avx512_vpoptndq la57 rdpid bus_lock_detect
movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
flush_lld debug_swap
Virtualization:        AMD-V

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR655 V3  
(3.15 GHz, AMD EPYC 9455)

SPECrate®2017\_fp\_base = 740

SPECrate®2017\_fp\_peak = 779

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Feb-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

### Platform Notes (Continued)

```

L1d cache:                2.3 MiB (48 instances)
L1i cache:                1.5 MiB (48 instances)
L2 cache:                 48 MiB (48 instances)
L3 cache:                 256 MiB (8 instances)
NUMA node(s):             4
NUMA node0 CPU(s):       0-11,48-59
NUMA node1 CPU(s):       12-23,60-71
NUMA node2 CPU(s):       24-35,72-83
NUMA node3 CPU(s):       36-47,84-95
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:      Not affected
Vulnerability Lltf:              Not affected
Vulnerability Mds:               Not affected
Vulnerability Melttdown:         Not affected
Vulnerability Mmio stale data:    Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:          Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass:  Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:        Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
                                  always-on; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected
Vulnerability Srbds:             Not affected
Vulnerability Tsx async abort:    Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	2.3M	12	Data	1	64	1	64
L1i	32K	1.5M	8	Instruction	1	64	1	64
L2	1M	48M	16	Unified	2	1024	1	64
L3	32M	256M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-11,48-59
node 0 size: 96345 MB
node 0 free: 95789 MB
node 1 cpus: 12-23,60-71
node 1 size: 96761 MB
node 1 free: 96326 MB
node 2 cpus: 24-35,72-83
node 2 size: 96761 MB
node 2 free: 96325 MB
node 3 cpus: 36-47,84-95
node 3 size: 96651 MB
node 3 free: 96230 MB
node distances:
node  0  1  2  3
0:  10  12  12  12
1:  12  10  12  12
2:  12  12  10  12
3:  12  12  12  10

```

9. /proc/meminfo

MemTotal: 395796820 kB

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR655 V3  
(3.15 GHz, AMD EPYC 9455)

SPECrate®2017\_fp\_base = 740

SPECrate®2017\_fp\_peak = 779

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Feb-2025  
**Hardware Availability:** Feb-2025  
**Software Availability:** Oct-2024

### Platform Notes (Continued)

10. who -r  
run-level 3 Feb 6 05:14

-----  
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)  
Default Target Status  
multi-user running

-----  
12. Services, from systemctl list-unit-files  
STATE UNIT FILES  
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance issue-generator  
kbdsettings klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd  
systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny  
enabled-runtime systemd-remount-fs  
disabled autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait  
chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info  
firewalld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievd issue-add-ssh-keys  
kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd  
serial-getty@ smartd\_generate\_opts snmpd snmptrapd systemd-boot-check-no-failures  
systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync  
systemd-timesyncd  
generated ntp\_sync  
indirect systemd-userdbd wickedd

-----  
13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default  
root=UUID=3343ae15-d2b7-40ed-b7cb-d367d374e720  
splash=silent  
mitigations=auto  
quiet  
security=apparmor

-----  
14. cpupower frequency-info  
analyzing CPU 49:  
Unable to determine current policy  
boost state support:  
Supported: yes  
Active: yes

-----  
15. sysctl  
kernel.numa\_balancing 1  
kernel.randomize\_va\_space 0  
vm.compaction\_proactiveness 20  
vm.dirty\_background\_bytes 0  
vm.dirty\_background\_ratio 10  
vm.dirty\_bytes 0  
vm.dirty\_expire\_centisecs 3000  
vm.dirty\_ratio 8  
vm.dirty\_writeback\_centisecs 500  
vm.dirtytime\_expire\_seconds 43200  
vm.extfrag\_threshold 500  
vm.min\_unmapped\_ratio 1  
vm.nr\_hugepages 0  
vm.nr\_hugepages\_mempolicy 0  
vm.nr\_overcommit\_hugepages 0  
vm.swappiness 1

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR655 V3  
(3.15 GHz, AMD EPYC 9455)

SPECrate®2017\_fp\_base = 740

SPECrate®2017\_fp\_peak = 779

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Feb-2025

**Hardware Availability:** Feb-2025

**Software Availability:** Oct-2024

### Platform Notes (Continued)

```

vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           1

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag          [always] defer defer+madvise madvise never
enabled         [always] madvise never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000

```

```

-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

```

```

-----
19. Disk information
SPEC is set to: /home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3       xfs   446G  45G  402G  10% /

```

```

-----
20. /sys/devices/virtual/dmi/id
Vendor:          Lenovo
Product:         ThinkSystem SR655 V3
Product Family: ThinkSystem
Serial:          1234567890

```

```

-----
21. dmidecode
Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  6x SK Hynix HMCG88AHBRA477N 32 GB 2 rank 6400, configured at 6000
  6x SK Hynix HMCG88AHBRA478N 32 GB 2 rank 6400, configured at 6000

```

```

-----
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      Lenovo
BIOS Version:     KAE131I-5.30
BIOS Date:        12/17/2024
BIOS Revision:    5.30
Firmware Revision: 54.6

```





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR655 V3  
(3.15 GHz, AMD EPYC 9455)

SPECrate®2017\_fp\_base = 740

SPECrate®2017\_fp\_peak = 779

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Feb-2025  
**Hardware Availability:** Feb-2025  
**Software Availability:** Oct-2024

### Compiler Version Notes

-----  
C | 519.lbm\_r(base, peak) 538.imagick\_r(base, peak) 544.nab\_r(base, peak)  
-----

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
-----

-----  
C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)  
-----

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
-----

-----  
C++, C | 511.povray\_r(base, peak) 526.blender\_r(base, peak)  
-----

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
-----

-----  
C++, C, Fortran | 507.cactuBSSN\_r(base, peak)  
-----

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
-----

-----  
Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base, peak)  
-----

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
-----

-----  
Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)  
-----

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECrate®2017\_fp\_base = 740

ThinkSystem SR655 V3  
(3.15 GHz, AMD EPYC 9455)

SPECrate®2017\_fp\_peak = 779

**CPU2017 License:** 9017

**Test Date:** Feb-2025

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Feb-2025

**Tested by:** Lenovo Global Technology

**Software Availability:** Oct-2024

## Compiler Version Notes (Continued)

```

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
-----

```

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Base Portability Flags

```

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

```



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_fp\_base = 740

ThinkSystem SR655 V3  
(3.15 GHz, AMD EPYC 9455)

SPECrate®2017\_fp\_peak = 779

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Feb-2025

**Hardware Availability:** Feb-2025

**Software Availability:** Oct-2024

## Base Optimization Flags

### C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl
```

### C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl
```

### Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc
-lflang -ldl
```

### Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions
-lamdlibm -lamdalloc -lflang -ldl
```

### Benchmarks using both C and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR655 V3  
(3.15 GHz, AMD EPYC 9455)

SPECrate®2017\_fp\_base = 740

SPECrate®2017\_fp\_peak = 779

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Feb-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

## Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):

```
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang
-ldl
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions
-lamdlibm -lamdalloc -lflang -ldl
```

## Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR655 V3  
(3.15 GHz, AMD EPYC 9455)

SPECrate®2017\_fp\_base = 740

SPECrate®2017\_fp\_peak = 779

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Feb-2025

**Hardware Availability:** Feb-2025

**Software Availability:** Oct-2024

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl
```

538.imagick\_r: Same as 519.lbm\_r

```
544.nab_r: -m64 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017\_fp\_base = 740

ThinkSystem SR655 V3  
(3.15 GHz, AMD EPYC 9455)

SPECrate®2017\_fp\_peak = 779

CPU2017 License: 9017

Test Date: Feb-2025

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2025

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

## Peak Optimization Flags (Continued)

544.nab\_r (continued):

```
-mllvm -reduce-array-computations=3 -zopt -lamdlibm  
-lamdalloc -ldl
```

C++ benchmarks:

508.namd\_r: -m64 -std=c++14

```
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto  
-mllvm -unroll-threshold=100  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm  
-lamdalloc -ldl
```

510.parest\_r: -m64 -std=c++14 -flto -Wl,-mllvm -Wl,-suppress-fmas

```
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math  
-mllvm -unroll-threshold=100  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm  
-lamdalloc -ldl
```

Fortran benchmarks:

503.bwaves\_r: basepeak = yes

549.fotonik3d\_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

```
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto  
-Mrecursive -mllvm -reduce-array-computations=3  
-fepilog-vectorization-of-inductions -fvector-transform  
-fscalar-transform -lamdlibm -lamdalloc -ldl -lflang
```

554.roms\_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

```
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto  
-Mrecursive -mllvm -reduce-array-computations=3  
-fepilog-vectorization-of-inductions -zopt -lamdlibm  
-lamdalloc -ldl -lflang
```

Benchmarks using both Fortran and C:

521.wrf\_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

```
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto  
-fstruct-layout=7 -mllvm -unroll-threshold=50
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR655 V3  
(3.15 GHz, AMD EPYC 9455)

SPECrate®2017\_fp\_base = 740

SPECrate®2017\_fp\_peak = 779

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Feb-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

## Peak Optimization Flags (Continued)

521.wrf\_r (continued):

```
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-ldl -lflang
```

527.cam4\_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

```
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -reduce-array-computations=3 -zopt -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-ldl -lflang
```

Benchmarks using both C and C++:

511.povray\_r: basepeak = yes

526.blender\_r: -m64 -std=c++14

```
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100 -lamdlibm -lamdalloc -ldl
```

Benchmarks using Fortran, C, and C++:

507.cactuBSSN\_r: basepeak = yes

## Peak Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR655 V3  
(3.15 GHz, AMD EPYC 9455)

SPECrate®2017\_fp\_base = 740

SPECrate®2017\_fp\_peak = 779

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Feb-2025

**Hardware Availability:** Feb-2025

**Software Availability:** Oct-2024

## Peak Other Flags (Continued)

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Turin-E.html>

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Turin-E.xml>

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2025-02-05 16:16:57-0500.

Report generated on 2025-02-25 19:06:12 by CPU2017 PDF formatter v6716.

Originally published on 2025-02-25.