



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Kaytus Systems Pte. Ltd. KR1180V3 (Intel Xeon 6766E)

### SPECrate®2017\_fp\_base = 569 SPECrate®2017\_fp\_peak = 581

CPU2017 License: 6865


Test Sponsor: Kaytus Systems Pte. Ltd.

Tested by: Kaytus Systems Pte. Ltd.

Test Date: Dec-2024

Hardware Availability: Oct-2024

Software Availability: Jun-2024

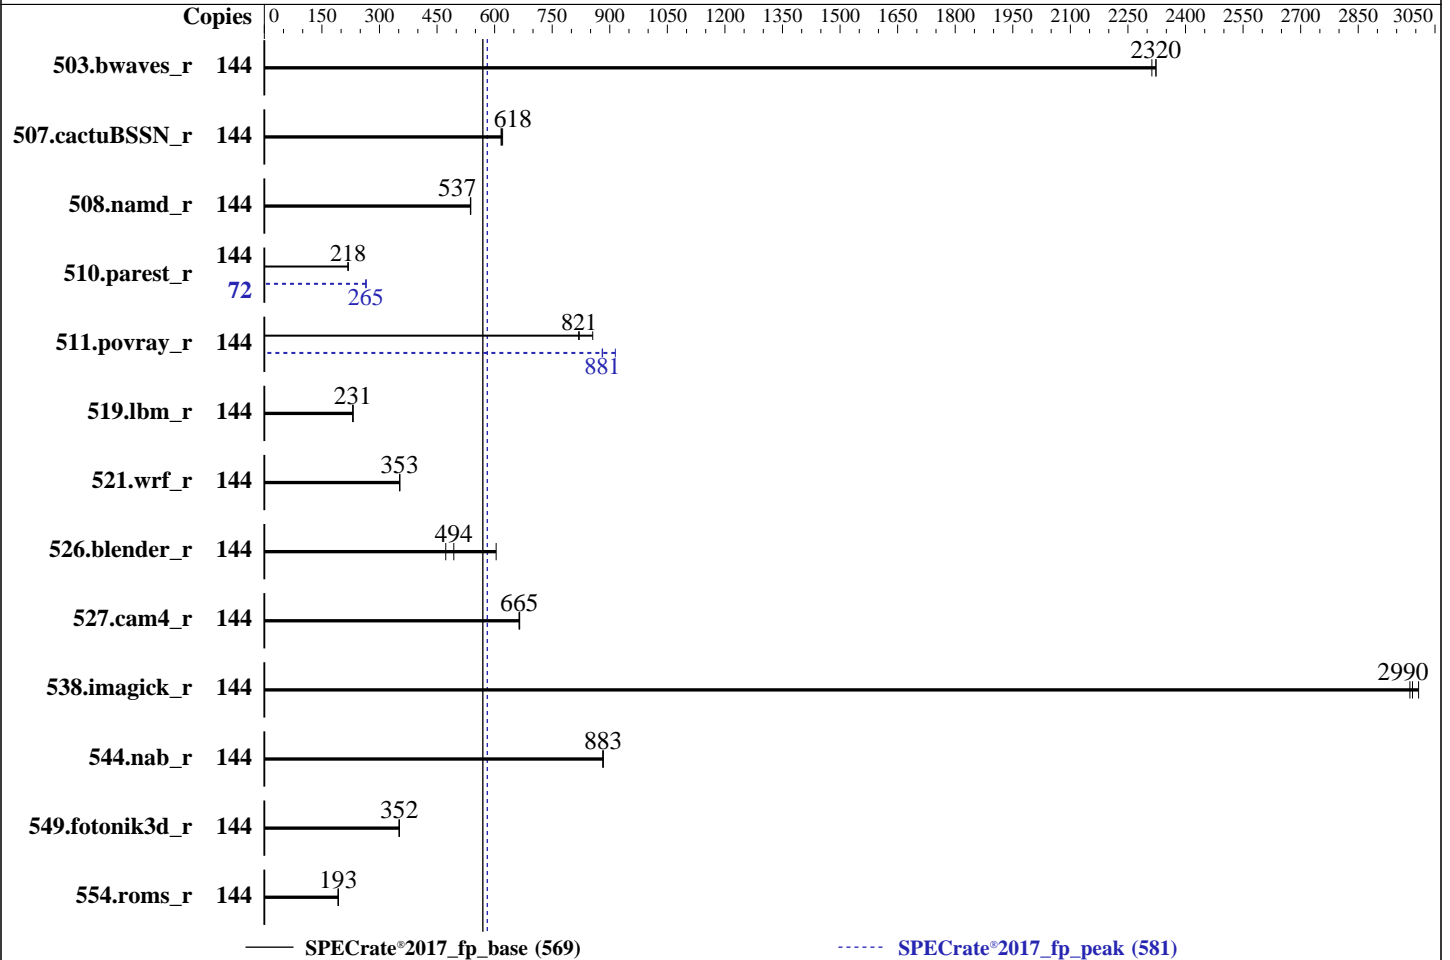

### Hardware

CPU Name: Intel Xeon 6766E  
 Max MHz: 2700  
 Nominal: 1900  
 Enabled: 144 cores, 1 chip  
 Orderable: 1 chip  
 Cache L1: 64 KB I + 32 KB D on chip per core  
 L2: 4 MB I+D on chip per core  
 L3: 108 MB I+D on chip per chip  
 Other: None  
 Memory: 512 GB (8 x 64 GB 2Rx4 PC5-6400B-R)  
 Storage: 1 x 960 GB NVME SSD  
 Other: CPU Cooling: Air

### Software

OS: SUSE Linux Enterprise Server 15 SP6  
 6.4.0-150600.21-default  
 Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++  
 Compiler for Linux;  
 Fortran: Version 2024.1 of Intel Fortran Compiler  
 for Linux;  
 Parallel: No  
 Firmware: Version 00.17.03 released Sep-2024  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS set to prefer performance at the cost  
 of additional power usage.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Kaytus Systems Pte. Ltd.

SPECrate®2017\_fp\_base = 569

## KR1180V3 (Intel Xeon 6766E)

SPECrate®2017\_fp\_peak = 581

CPU2017 License: 6865

Test Sponsor: Kaytus Systems Pte. Ltd.

Tested by: Kaytus Systems Pte. Ltd.

Test Date: Dec-2024

Hardware Availability: Oct-2024

Software Availability: Jun-2024

### Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	144	622	2320	624	2310	<b>622</b>	<b>2320</b>	144	622	2320	624	2310	<b>622</b>	<b>2320</b>
507.cactuBSSN_r	144	294	621	296	617	<b>295</b>	<b>618</b>	144	294	621	296	617	<b>295</b>	<b>618</b>
508.namd_r	144	<b>255</b>	<b>537</b>	254	538	255	537	144	<b>255</b>	<b>537</b>	254	538	255	537
510.parest_r	144	1728	218	<b>1725</b>	<b>218</b>	1724	219	72	<b>711</b>	<b>265</b>	711	265	711	265
511.povray_r	144	393	856	411	819	<b>410</b>	<b>821</b>	144	382	880	368	915	<b>382</b>	<b>881</b>
519.lbm_r	144	658	231	657	231	<b>658</b>	<b>231</b>	144	658	231	657	231	<b>658</b>	<b>231</b>
521.wrf_r	144	914	353	<b>915</b>	<b>353</b>	915	352	144	914	353	<b>915</b>	<b>353</b>	915	352
526.blender_r	144	<b>444</b>	<b>494</b>	363	604	464	473	144	<b>444</b>	<b>494</b>	363	604	464	473
527.cam4_r	144	379	665	379	664	<b>379</b>	<b>665</b>	144	379	665	379	664	<b>379</b>	<b>665</b>
538.imagick_r	144	<b>120</b>	<b>2990</b>	119	3010	120	2980	144	<b>120</b>	<b>2990</b>	119	3010	120	2980
544.nab_r	144	275	882	<b>275</b>	<b>883</b>	274	883	144	275	882	<b>275</b>	<b>883</b>	274	883
549.fotonik3d_r	144	1599	351	<b>1595</b>	<b>352</b>	1595	352	144	1599	351	<b>1595</b>	<b>352</b>	1595	352
554.roms_r	144	1190	192	1187	193	<b>1187</b>	<b>193</b>	144	1190	192	1187	193	<b>1187</b>	<b>193</b>

SPECrate®2017\_fp\_base = **569**

SPECrate®2017\_fp\_peak = **581**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

### Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

### Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

### Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/CPU2017/lib/intel64:/home/CPU2017/je5.0.1-64"  
MALLOC\_CONF = "retain:true"

### General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM  
memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Kaytus Systems Pte. Ltd.

SPECrate®2017\_fp\_base = 569

## KR1180V3 (Intel Xeon 6766E)

SPECrate®2017\_fp\_peak = 581

**CPU2017 License:** 6865

**Test Date:** Dec-2024

**Test Sponsor:** Kaytus Systems Pte. Ltd.

**Hardware Availability:** Oct-2024

**Tested by:** Kaytus Systems Pte. Ltd.

**Software Availability:** Jun-2024

### General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

### Platform Notes

BIOS configuration:

ENERGY\_PERF\_BIAS\_CFG mode set to Performance  
Hardware Prefetch set to Disable  
VT Support set to Disable

Sysinfo program /home/CPU2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Tue Dec 31 18:25:26 2024

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent\_hugepage
17. /sys/kernel/mm/transparent\_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

-----

1. uname -a  
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT\_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)  
x86\_64 x86\_64 x86\_64 GNU/Linux

-----

2. w  
18:25:26 up 6:12, 1 user, load average: 83.37, 128.77, 138.07  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
root tty1 - 12:14 6:09m 1.59s 0.04s -bash

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Kaytus Systems Pte. Ltd.**  
**KR1180V3 (Intel Xeon 6766E)**

**SPECrate®2017\_fp\_base = 569**  
**SPECrate®2017\_fp\_peak = 581**

**CPU2017 License:** 6865  
**Test Sponsor:** Kaytus Systems Pte. Ltd.  
**Tested by:** Kaytus Systems Pte. Ltd.

**Test Date:** Dec-2024  
**Hardware Availability:** Oct-2024  
**Software Availability:** Jun-2024

## Platform Notes (Continued)

### 3. Username

From environment variable \$USER: root

### 4. ulimit -a

```
core file size          (blocks, -c) unlimited
data seg size          (kbytes, -d) unlimited
scheduling priority    (-e) 0
file size              (blocks, -f) unlimited
pending signals        (-i) 2059548
max locked memory      (kbytes, -l) 8192
max memory size        (kbytes, -m) unlimited
open files             (-n) 1024
pipe size              (512 bytes, -p) 8
POSIX message queues   (bytes, -q) 819200
real-time priority     (-r) 0
stack size             (kbytes, -s) unlimited
cpu time               (seconds, -t) unlimited
max user processes     (-u) 2059548
virtual memory         (kbytes, -v) unlimited
file locks             (-x) unlimited
```

### 5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize=31
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=144 -c
ic2024.1-lin-sierraforest-rate-20240308.cfg --define smt-on --define peakfpcopies=72 --define
physicalfirst --define no-numa --reportable --tune base,peak --o all --define drop_caches fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=144 --configfile
ic2024.1-lin-sierraforest-rate-20240308.cfg --define smt-on --define peakfpcopies=72 --define
physicalfirst --define no-numa --reportable --tune base,peak --output_format all --define drop_caches
--nopower --runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/CPU2017
```

### 6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) 6766E
vendor_id      : GenuineIntel
cpu family     : 6
model          : 175
stepping       : 3
microcode      : 0x3000190
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores      : 144
siblings       : 144
1 physical ids (chips)
144 processors (hardware threads)
physical id 0: core ids 0-143
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110,112,114,116,118,120,122,124,126,128,130,1
32,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,180,182,18
4,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222,224,226,228,230,232,234,236
,238,240,242,244,246,248,250,252,254,256,258,260,262,264,266,268,270,272,274,276,278,280,282,284,286
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Kaytus Systems Pte. Ltd.

## SPECrate®2017\_fp\_base = 569

## KR1180V3 (Intel Xeon 6766E)

## SPECrate®2017\_fp\_peak = 581

**CPU2017 License:** 6865

**Test Sponsor:** Kaytus Systems Pte. Ltd.

**Tested by:** Kaytus Systems Pte. Ltd.

**Test Date:** Dec-2024

**Hardware Availability:** Oct-2024

**Software Availability:** Jun-2024

### Platform Notes (Continued)

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

#### 7. lscpu

From lscpu from util-linux 2.39.3:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 48 bits virtual
Byte Order:            Little Endian
CPU(s):                144
On-line CPU(s) list:  0-143
Vendor ID:             GenuineIntel
BIOS Vendor ID:       Intel(R) Corporation
Model name:            Intel(R) Xeon(R) 6766E
BIOS Model name:      Intel(R) Xeon(R) 6766E  CPU @ 1.9GHz
BIOS CPU family:      179
CPU family:           6
Model:                 175
Thread(s) per core:   1
Core(s) per socket:   144
Socket(s):             1
Stepping:              3
Frequency boost:      enabled
CPU(s) scaling MHz:   46%
CPU max MHz:          1901.0000
CPU min MHz:          800.0000
BogoMIPS:              3800.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
pclmulqdq dtes64 ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb
cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp
ibrs_enhanced fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid
cqm rdt_a rdseed adx smap clflushopt clwb intel_pt sha_ni xsaveopt
xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local split_lock_detect user_shstk avx_vnni lam wbnoinvd
dtherm ida arat pln pts umip pku ospke waitpkg gfni vaes vpclmulqdq
tme rdpid bus_lock_detect cldemote movdir64b enqcmd fsrm
md_clear serialize pconfig arch_lbr ibt flush_lld arch_capabilities
L1d cache:            4.5 MiB (144 instances)
L1i cache:            9 MiB (144 instances)
L2 cache:             144 MiB (36 instances)
L3 cache:             108 MiB (1 instance)
NUMA node(s):        1
NUMA node0 CPU(s):  0-143
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:      Not affected
Vulnerability L1tf:               Not affected
Vulnerability Mds:                 Not affected
Vulnerability Meltdown:           Not affected
Vulnerability Mmio stale data:    Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:           Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass:  Mitigation; Speculative Store Bypass disabled via prctl

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Kaytus Systems Pte. Ltd. KR1180V3 (Intel Xeon 6766E)

## SPECrate®2017\_fp\_base = 569 SPECrate®2017\_fp\_peak = 581

**CPU2017 License:** 6865  
**Test Sponsor:** Kaytus Systems Pte. Ltd.  
**Tested by:** Kaytus Systems Pte. Ltd.

**Test Date:** Dec-2024  
**Hardware Availability:** Oct-2024  
**Software Availability:** Jun-2024

### Platform Notes (Continued)

Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and \_\_user pointer sanitization  
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRBSB-eIBRS Not affected; BHI BHI\_DIS\_S  
Vulnerability Srbds: Not affected  
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	4.5M	8	Data	1	64	1	64
L1i	64K	9M	8	Instruction	1	128	1	64
L2	4M	144M	16	Unified	2	4096	1	64
L3	108M	108M	12	Unified	3	147456	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.  
available: 1 nodes (0)  
node 0 cpus: 0-143  
node 0 size: 514912 MB  
node 0 free: 454926 MB  
node distances:  
node 0  
0: 10

9. /proc/meminfo

MemTotal: 527270552 kB

10. who -r

run-level 3 Dec 31 12:13

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

Default Target Status  
multi-user running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	apparmor auditd cron firewalld getty@ irqbalance issue-generator kbdsettings kdump kdump-early kdump-notify nvme-fc-boot-connections nvme-autoconnect postfix purge-kernels rollback sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell ebttables exchange-bmc-os-info fsidd grub2-once haveged ipmievd issue-add-ssh-keys kexec-load lunmask nfs nfs-blkmap rpcbind rpmconfigcheck serial-getty@ systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysextd systemd-time-wait-sync systemd-timesyncd
indirect	systemd-userdbd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT\_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default  
root=UUID=3d2e35de-7a40-49d4-9b7e-5a61505ac35b  
splash=silent  
resume=/dev/disk/by-uuid/12ee3b15-7778-419b-ab9f-ab402e71e53d  
mitigations=auto  
quiet

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Kaytus Systems Pte. Ltd.

SPECrate®2017\_fp\_base = 569

## KR1180V3 (Intel Xeon 6766E)

SPECrate®2017\_fp\_peak = 581

**CPU2017 License:** 6865

**Test Sponsor:** Kaytus Systems Pte. Ltd.

**Tested by:** Kaytus Systems Pte. Ltd.

**Test Date:** Dec-2024

**Hardware Availability:** Oct-2024

**Software Availability:** Jun-2024

### Platform Notes (Continued)

```
security=apparmor
crashkernel=370M,high
crashkernel=72M,low
```

#### 14. cpupower frequency-info

```
analyzing CPU 99:
  current policy: frequency should be within 800 MHz and 1.90 GHz.
                  The governor "ondemand" may decide which speed to use
                  within this range.
  boost state support:
    Supported: yes
    Active: yes
```

#### 15. sysctl

```
kernel.numa_balancing          0
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0
```

#### 16. /sys/kernel/mm/transparent\_hugepage

```
defrag          always defer defer+madvise [madvise] never
enabled         [always] madvise never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force
```

#### 17. /sys/kernel/mm/transparent\_hugepage/khugepaged

```
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000
```

#### 18. OS release

```
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6
```

#### 19. Disk information

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Kaytus Systems Pte. Ltd.**  
**KR1180V3 (Intel Xeon 6766E)**

**SPECrate®2017\_fp\_base = 569**  
**SPECrate®2017\_fp\_peak = 581**

**CPU2017 License:** 6865  
**Test Sponsor:** Kaytus Systems Pte. Ltd.  
**Tested by:** Kaytus Systems Pte. Ltd.

**Test Date:** Dec-2024  
**Hardware Availability:** Oct-2024  
**Software Availability:** Jun-2024

## Platform Notes (Continued)

SPEC is set to: /home/CPU2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/nvme0n1p3	xfs	381G	98G	283G	26%	/home

```

-----
20. /sys/devices/virtual/dmi/id
Vendor:      KAYTUS
Product:     KR1180-X3-A0-R0-00
Product Family: Not specified
Serial:      012345678
-----

```

```

-----
21. dmidecode
Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  8x Samsung M321R8GA0PB2-CCPEC 64 GB 2 rank 6400
-----

```

```

-----
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:   American Megatrends International, LLC.
BIOS Version:  00.17.03
BIOS Date:     09/27/2024
-----

```

## Compiler Version Notes

```

=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
-----

```

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
-----

```

```

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)
-----

```

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
-----

```

```

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)
-----

```

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
-----

```

```

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
-----

```

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
-----

```

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

SPECrate®2017\_fp\_base = 569

KR1180V3 (Intel Xeon 6766E)

SPECrate®2017\_fp\_peak = 581

CPU2017 License: 6865

Test Sponsor: Kaytus Systems Pte. Ltd.

Tested by: Kaytus Systems Pte. Ltd.

Test Date: Dec-2024

Hardware Availability: Oct-2024

Software Availability: Jun-2024

## Compiler Version Notes (Continued)

Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====  
Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base, peak)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====  
Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

SPECrate®2017\_fp\_base = 569

KR1180V3 (Intel Xeon 6766E)

SPECrate®2017\_fp\_peak = 581

CPU2017 License: 6865

Test Date: Dec-2024

Test Sponsor: Kaytus Systems Pte. Ltd.

Hardware Availability: Oct-2024

Tested by: Kaytus Systems Pte. Ltd.

Software Availability: Jun-2024

## Base Portability Flags (Continued)

```
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

## Base Optimization Flags

### C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

### C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

### Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

### Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -nostandard-realloc-lhs -align array32byte -auto
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

### Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsierraforest -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

### Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsierraforest -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -nostandard-realloc-lhs
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

SPECrate®2017\_fp\_base = 569

KR1180V3 (Intel Xeon 6766E)

SPECrate®2017\_fp\_peak = 581

CPU2017 License: 6865

Test Date: Dec-2024

Test Sponsor: Kaytus Systems Pte. Ltd.

Hardware Availability: Oct-2024

Tested by: Kaytus Systems Pte. Ltd.

Software Availability: Jun-2024

## Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: basepeak = yes

538.imagick\_r: basepeak = yes

544.nab\_r: basepeak = yes

C++ benchmarks:

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Kaytus Systems Pte. Ltd.

SPECrate®2017\_fp\_base = 569

KR1180V3 (Intel Xeon 6766E)

SPECrate®2017\_fp\_peak = 581

CPU2017 License: 6865

Test Date: Dec-2024

Test Sponsor: Kaytus Systems Pte. Ltd.

Hardware Availability: Oct-2024

Tested by: Kaytus Systems Pte. Ltd.

Software Availability: Jun-2024

## Peak Optimization Flags (Continued)

508.namd\_r: basepeak = yes

```
510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsierraforest -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

503.bwaves\_r: basepeak = yes

549.fotonik3d\_r: basepeak = yes

554.roms\_r: basepeak = yes

Benchmarks using both Fortran and C:

521.wrf\_r: basepeak = yes

527.cam4\_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2 -flto
-Ofast -ffast-math -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Kaytus-Platform-Settings-intel-V1.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Kaytus-Platform-Settings-intel-V1.0.xml>



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Kaytus Systems Pte. Ltd.**  
**KR1180V3 (Intel Xeon 6766E)**

**SPECrate®2017\_fp\_base = 569**

**SPECrate®2017\_fp\_peak = 581**

**CPU2017 License:** 6865

**Test Sponsor:** Kaytus Systems Pte. Ltd.

**Tested by:** Kaytus Systems Pte. Ltd.

**Test Date:** Dec-2024

**Hardware Availability:** Oct-2024

**Software Availability:** Jun-2024

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-12-31 18:25:26-0500.

Report generated on 2025-03-26 10:32:46 by CPU2017 PDF formatter v6716.

Originally published on 2025-03-25.