



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)


HPE Compute Scale-up Server 3200
(2.10 GHz, Intel Xeon Platinum 8454H)

SPECrate®2017_fp_base = 10200

SPECrate®2017_fp_peak = 10500

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2025
Hardware Availability: Apr-2025
Software Availability: Feb-2025

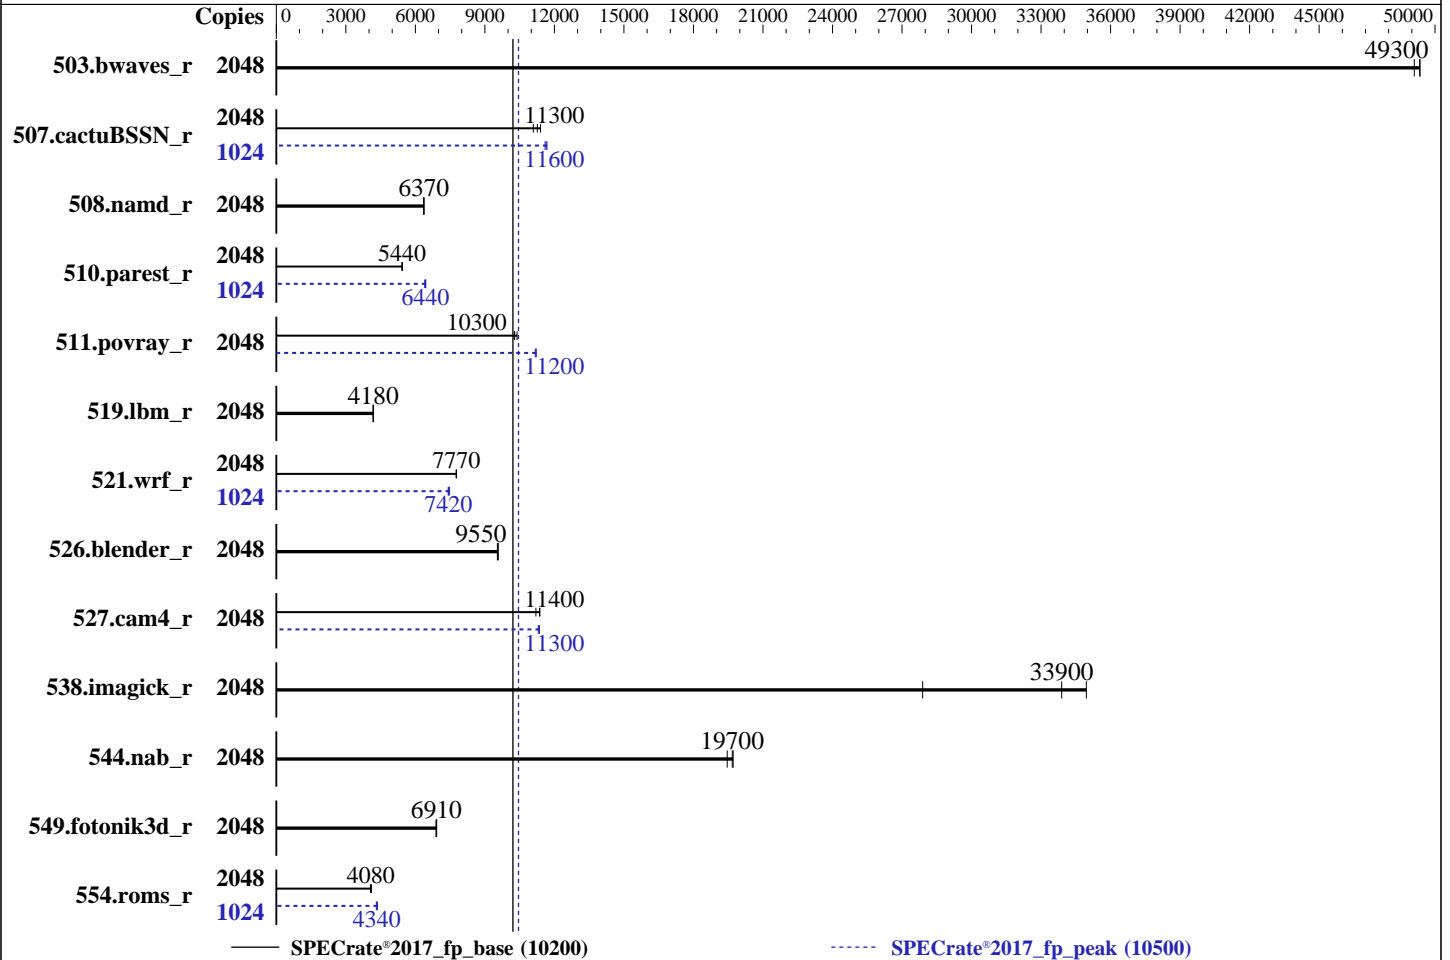

Hardware

CPU Name: Intel Xeon Platinum 8454H
 Max MHz: 3400
 Nominal: 2100
 Enabled: 1024 cores, 32 chips, 2 threads/core
 Orderable: 4, 8, 16, 32 chip(s)
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 82.5 MB I+D on chip per chip
 Other: None
 Memory: 32 TB (512 x 64 GB 2Rx4 PC5-4800B-R, running at 4400)
 Storage: 1 x 6.4 TB NVMe SSD
 Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
 Kernel 6.4.0-150600.23.38-default
 Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: HPE Firmware Bundle Version 1.55.40 01/27/2025 released Jan-2025
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200
(2.10 GHz, Intel Xeon Platinum 8454H)

SPECrate®2017_fp_base = 10200

SPECrate®2017_fp_peak = 10500

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2025
Hardware Availability: Apr-2025
Software Availability: Feb-2025

Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	2048	418	49100	416	49300	416	49400	2048	418	49100	416	49300	416	49400
507.cactuBSSN_r	2048	227	11400	230	11300	234	11100	1024	111	11600	112	11600	111	11700
508.namd_r	2048	306	6350	305	6370	306	6370	2048	306	6350	305	6370	306	6370
510.parest_r	2048	985	5440	985	5440	988	5420	1024	419	6400	415	6450	416	6440
511.povray_r	2048	465	10300	460	10400	465	10300	2048	427	11200	428	11200	427	11200
519.lbm_r	2048	516	4180	517	4180	516	4190	2048	516	4180	517	4180	516	4190
521.wrf_r	2048	591	7760	590	7770	590	7780	1024	309	7420	309	7420	307	7480
526.blender_r	2048	326	9550	326	9580	327	9540	2048	326	9550	326	9580	327	9540
527.cam4_r	2048	320	11200	315	11400	315	11400	2048	317	11300	316	11300	315	11400
538.imagick_r	2048	146	35000	183	27900	150	33900	2048	146	35000	183	27900	150	33900
544.nab_r	2048	177	19500	175	19700	175	19700	2048	177	19500	175	19700	175	19700
549.fotonik3d_r	2048	1155	6910	1153	6920	1158	6890	2048	1155	6910	1153	6920	1158	6890
554.roms_r	2048	798	4080	793	4100	800	4070	1024	377	4310	375	4340	373	4360

SPECrate®2017_fp_base = **10200**

SPECrate®2017_fp_peak = **10500**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOCONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200
(2.10 GHz, Intel Xeon Platinum 8454H)

SPECrate®2017_fp_base = 10200

SPECrate®2017_fp_peak = 10500

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2025
Hardware Availability: Apr-2025
Software Availability: Feb-2025

General Notes (Continued)

is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Configuration:

Workload Profile set to Custom
Energy/Performance Bias set to Maximum Performance
Energy Efficient Turbo set to Disabled
Advanced Memory Protection set to Advanced ECC Support
SR-IOV set to Disabled
Intel Virtualization Technology (Intel VT, VT-x) set to Disabled
Adjacent Sector Prefetch set to Disabled
DCU Stream Prefetcher set to Disabled
Last Level Cache (LLC) Dead Line Allocation set to Disabled
Enhanced Processor Performance Profile set to Aggressive
Memory Patrol Scrubbing set to Disabled

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on sph-275 Fri Feb 28 21:47:23 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.23+suse.141.g9376e684d0)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. tuned-adm active
17. sysctl
18. /sys/kernel/mm/transparent_hugepage
19. /sys/kernel/mm/transparent_hugepage/khugepaged
20. OS release
21. Disk information
22. /sys/devices/virtual/dmi/id
23. dmidecode
24. BIOS

1. uname -a

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200
(2.10 GHz, Intel Xeon Platinum 8454H)

SPECrate®2017_fp_base = 10200

SPECrate®2017_fp_peak = 10500

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2025
Hardware Availability: Apr-2025
Software Availability: Feb-2025

Platform Notes (Continued)

```
Linux sph-275 6.4.0-150600.23.38-default #1 SMP PREEMPT_DYNAMIC Thu Feb 6 08:53:28 UTC 2025 (cb92f8c)
x86_64 x86_64 x86_64 GNU/Linux
```

```
-----
2. w
 21:47:23 up 9:44, 1 user, load average: 2.61, 2.66, 3.77
USER  TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
test  ttyS0    -                12:10   9:36m  0.21s  0.66s login -- test
test  pts/0    -                12:10  11.00s  2.31s  0.15s sudo su
```

```
-----
3. Username
From environment variable $USER: root
From the command 'logname': test
```

```
-----
4. ulimit -a
core file size          (blocks, -c) 0
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 130060678
max locked memory       (kbytes, -l) 8192
max memory size         (kbytes, -m) unlimited
open files              (-n) 40000
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes     (-u) 130060678
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=43
login -- test
-bash
sudo su
sudo su
su
bash
bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=2048 -c
ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=1024 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=2048 --configfile
ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=1024 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
--runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.013/templogs/preenv.fprate.013.0.log --lognum 013.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

```
-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Platinum 8454H
vendor_id      : GenuineIntel
cpu family     : 6
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200
(2.10 GHz, Intel Xeon Platinum 8454H)

SPECrate®2017_fp_base = 10200

SPECrate®2017_fp_peak = 10500

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2025
Hardware Availability: Apr-2025
Software Availability: Feb-2025

Platform Notes (Continued)

```

model          : 143
stepping       : 8
microcode      : 0x2b000620
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb bhi
cpu cores      : 32
siblings       : 64
32 physical ids (chips)
2048 processors (hardware threads)
physical id 0: core ids 0-31
physical id 1: core ids 0-31
physical id 2: core ids 0-31
physical id 3: core ids 0-31
physical id 4: core ids 0-31
physical id 5: core ids 0-31
physical id 6: core ids 0-31
physical id 7: core ids 0-31
physical id 8: core ids 0-31
physical id 9: core ids 0-31
physical id 10: core ids 0-31
physical id 11: core ids 0-31
physical id 12: core ids 0-31
physical id 13: core ids 0-31
physical id 14: core ids 0-31
physical id 15: core ids 0-31
physical id 16: core ids 0-31
physical id 17: core ids 0-31
physical id 18: core ids 0-31
physical id 19: core ids 0-31
physical id 20: core ids 0-31
physical id 21: core ids 0-31
physical id 22: core ids 0-31
physical id 23: core ids 0-31
physical id 24: core ids 0-31
physical id 25: core ids 0-31
physical id 26: core ids 0-31
physical id 27: core ids 0-31
physical id 28: core ids 0-31
physical id 29: core ids 0-31
physical id 30: core ids 0-31
physical id 31: core ids 0-31
physical id 0: apicids 0-63
physical id 1: apicids 128-191
physical id 2: apicids 256-319
physical id 3: apicids 384-447
physical id 4: apicids 512-575
physical id 5: apicids 640-703
physical id 6: apicids 768-831
physical id 7: apicids 896-959
physical id 8: apicids 1024-1087
physical id 9: apicids 1152-1215
physical id 10: apicids 1280-1343
physical id 11: apicids 1408-1471
physical id 12: apicids 1536-1599
physical id 13: apicids 1664-1727
physical id 14: apicids 1792-1855
physical id 15: apicids 1920-1983
physical id 16: apicids 2048-2111
physical id 17: apicids 2176-2239
physical id 18: apicids 2304-2367
physical id 19: apicids 2432-2495

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200
(2.10 GHz, Intel Xeon Platinum 8454H)

SPECrate®2017_fp_base = 10200

SPECrate®2017_fp_peak = 10500

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2025
Hardware Availability: Apr-2025
Software Availability: Feb-2025

Platform Notes (Continued)

```
physical id 20: apicids 2560-2623
physical id 21: apicids 2688-2751
physical id 22: apicids 2816-2879
physical id 23: apicids 2944-3007
physical id 24: apicids 3072-3135
physical id 25: apicids 3200-3263
physical id 26: apicids 3328-3391
physical id 27: apicids 3456-3519
physical id 28: apicids 3584-3647
physical id 29: apicids 3712-3775
physical id 30: apicids 3840-3903
physical id 31: apicids 3968-4031
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                2048
On-line CPU(s) list:  0-2047
Vendor ID:             GenuineIntel
Model name:            Intel(R) Xeon(R) Platinum 8454H
CPU family:            6
Model:                 143
Thread(s) per core:   2
Core(s) per socket:   32
Socket(s):             32
Stepping:              8
CPU(s) scaling MHz:   24%
CPU max MHz:          3400.0000
CPU min MHz:          800.0000
BogoMIPS:              4200.03
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
pdpelgb rdtscp lm constant_tsc arch_perfmon pebs bts rep_good nopl
xtopology nonstop_tsc cpuid aperfmperf pni pclmulqdq dtes64 monitor
ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase
tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f
avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd
sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc
cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect
user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hwp
hwp_act_window hwp_pkg_req avx512vbmi umip pku ospke waitpkg
avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri
movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr
ibt amx_bf16 avx512_fp16 amx_tile amx_int8 flush_lld
arch_capabilities
L1d cache:            48 MiB (1024 instances)
L1i cache:            32 MiB (1024 instances)
L2 cache:             2 GiB (1024 instances)
L3 cache:             2.6 GiB (32 instances)
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200

(2.10 GHz, Intel Xeon Platinum 8454H)

SPECrate®2017_fp_base = 10200

SPECrate®2017_fp_peak = 10500

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2025
Hardware Availability: Apr-2025
Software Availability: Feb-2025

Platform Notes (Continued)

```

NUMA node(s): 32
NUMA node0 CPU(s): 0-31,1024-1055
NUMA node1 CPU(s): 32-63,1056-1087
NUMA node2 CPU(s): 64-95,1088-1119
NUMA node3 CPU(s): 96-127,1120-1151
NUMA node4 CPU(s): 128-159,1152-1183
NUMA node5 CPU(s): 160-191,1184-1215
NUMA node6 CPU(s): 192-223,1216-1247
NUMA node7 CPU(s): 224-255,1248-1279
NUMA node8 CPU(s): 256-287,1280-1311
NUMA node9 CPU(s): 288-319,1312-1343
NUMA node10 CPU(s): 320-351,1344-1375
NUMA node11 CPU(s): 352-383,1376-1407
NUMA node12 CPU(s): 384-415,1408-1439
NUMA node13 CPU(s): 416-447,1440-1471
NUMA node14 CPU(s): 448-479,1472-1503
NUMA node15 CPU(s): 480-511,1504-1535
NUMA node16 CPU(s): 512-543,1536-1567
NUMA node17 CPU(s): 544-575,1568-1599
NUMA node18 CPU(s): 576-607,1600-1631
NUMA node19 CPU(s): 608-639,1632-1663
NUMA node20 CPU(s): 640-671,1664-1695
NUMA node21 CPU(s): 672-703,1696-1727
NUMA node22 CPU(s): 704-735,1728-1759
NUMA node23 CPU(s): 736-767,1760-1791
NUMA node24 CPU(s): 768-799,1792-1823
NUMA node25 CPU(s): 800-831,1824-1855
NUMA node26 CPU(s): 832-863,1856-1887
NUMA node27 CPU(s): 864-895,1888-1919
NUMA node28 CPU(s): 896-927,1920-1951
NUMA node29 CPU(s): 928-959,1952-1983
NUMA node30 CPU(s): 960-991,1984-2015
NUMA node31 CPU(s): 992-1023,2016-2047
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability Lltf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
PBRSE-eIBRS SW sequence; BHI BHI_DIS_S
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	48M	12	Data	1	64	1	64
L1i	32K	32M	8	Instruction	1	64	1	64
L2	2M	2G	16	Unified	2	2048	1	64
L3	82.5M	2.6G	15	Unified	3	90112	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 32 nodes (0-31)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200
(2.10 GHz, Intel Xeon Platinum 8454H)

SPECrate®2017_fp_base = 10200

SPECrate®2017_fp_peak = 10500

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2025
Hardware Availability: Apr-2025
Software Availability: Feb-2025

Platform Notes (Continued)

```

node 0 cpus: 0-31,1024-1055
node 0 size: 1015095 MB
node 0 free: 1012291 MB
node 1 cpus: 32-63,1056-1087
node 1 size: 1016234 MB
node 1 free: 1014633 MB
node 2 cpus: 64-95,1088-1119
node 2 size: 1016234 MB
node 2 free: 1014123 MB
node 3 cpus: 96-127,1120-1151
node 3 size: 1016234 MB
node 3 free: 1014245 MB
node 4 cpus: 128-159,1152-1183
node 4 size: 1016234 MB
node 4 free: 1014622 MB
node 5 cpus: 160-191,1184-1215
node 5 size: 1016234 MB
node 5 free: 1014698 MB
node 6 cpus: 192-223,1216-1247
node 6 size: 1016234 MB
node 6 free: 1014367 MB
node 7 cpus: 224-255,1248-1279
node 7 size: 1016234 MB
node 7 free: 1014431 MB
node 8 cpus: 256-287,1280-1311
node 8 size: 1016234 MB
node 8 free: 1014404 MB
node 9 cpus: 288-319,1312-1343
node 9 size: 1016234 MB
node 9 free: 1014164 MB
node 10 cpus: 320-351,1344-1375
node 10 size: 1016234 MB
node 10 free: 1014243 MB
node 11 cpus: 352-383,1376-1407
node 11 size: 1016234 MB
node 11 free: 1014232 MB
node 12 cpus: 384-415,1408-1439
node 12 size: 1016234 MB
node 12 free: 1014628 MB
node 13 cpus: 416-447,1440-1471
node 13 size: 1016196 MB
node 13 free: 1014600 MB
node 14 cpus: 448-479,1472-1503
node 14 size: 1016234 MB
node 14 free: 1014336 MB
node 15 cpus: 480-511,1504-1535
node 15 size: 1016234 MB
node 15 free: 1014353 MB
node 16 cpus: 512-543,1536-1567
node 16 size: 1016234 MB
node 16 free: 1014566 MB
node 17 cpus: 544-575,1568-1599
node 17 size: 1016234 MB
node 17 free: 1014693 MB
node 18 cpus: 576-607,1600-1631
node 18 size: 1016234 MB
node 18 free: 1014401 MB
node 19 cpus: 608-639,1632-1663
node 19 size: 1016234 MB
node 19 free: 1014373 MB

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200
(2.10 GHz, Intel Xeon Platinum 8454H)

SPECrate®2017_fp_base = 10200

SPECrate®2017_fp_peak = 10500

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2025
Hardware Availability: Apr-2025
Software Availability: Feb-2025

Platform Notes (Continued)

```

node 20 cpus: 640-671,1664-1695
node 20 size: 1016234 MB
node 20 free: 1014652 MB
node 21 cpus: 672-703,1696-1727
node 21 size: 1016234 MB
node 21 free: 1014648 MB
node 22 cpus: 704-735,1728-1759
node 22 size: 1016234 MB
node 22 free: 1014393 MB
node 23 cpus: 736-767,1760-1791
node 23 size: 1016234 MB
node 23 free: 1014381 MB
node 24 cpus: 768-799,1792-1823
node 24 size: 1016234 MB
node 24 free: 1014701 MB
node 25 cpus: 800-831,1824-1855
node 25 size: 1016234 MB
node 25 free: 1014729 MB
node 26 cpus: 832-863,1856-1887
node 26 size: 1016234 MB
node 26 free: 1014386 MB
node 27 cpus: 864-895,1888-1919
node 27 size: 1016234 MB
node 27 free: 1014433 MB
node 28 cpus: 896-927,1920-1951
node 28 size: 1016234 MB
node 28 free: 1013414 MB
node 29 cpus: 928-959,1952-1983
node 29 size: 1016234 MB
node 29 free: 1014495 MB
node 30 cpus: 960-991,1984-2015
node 30 size: 1016234 MB
node 30 free: 1014082 MB
node 31 cpus: 992-1023,2016-2047
node 31 size: 1013107 MB
node 31 free: 1010950 MB

```

```

node distances:
node 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31
0: 10 16 16 18 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40
40 40 40 40 40 40 40
1: 16 10 18 16 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40
40 40 40 40 40 40 40
2: 16 18 10 16 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40
40 40 40 40 40 40 40
3: 18 16 16 10 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40
40 40 40 40 40 40 40
4: 40 40 40 40 10 16 16 18 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40
40 40 40 40 40 40 40
5: 40 40 40 40 40 16 10 18 16 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40
40 40 40 40 40 40 40
6: 40 40 40 40 16 18 10 16 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40
40 40 40 40 40 40 40
7: 40 40 40 40 40 18 16 16 10 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40
40 40 40 40 40 40 40
8: 40 40 40 40 40 40 40 40 10 16 16 18 40 40 40 40 40 40 40 40 40 40 40 40
40 40 40 40 40 40 40
9: 40 40 40 40 40 40 40 40 40 16 10 18 16 40 40 40 40 40 40 40 40 40 40 40
40 40 40 40 40 40 40
10: 40 40 40 40 40 40 40 40 40 16 18 10 16 40 40 40 40 40 40 40 40 40 40 40
40 40 40 40 40 40 40

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200
(2.10 GHz, Intel Xeon Platinum 8454H)

SPECrate®2017_fp_base = 10200

SPECrate®2017_fp_peak = 10500

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2025
Hardware Availability: Apr-2025
Software Availability: Feb-2025

Platform Notes (Continued)

```

40 40 40 40 40 40 40 40
11: 40 40 40 40 40 40 40 40 40 40 18 16 16 10 40 40 40 40 40 40 40 40 40 40 40
40 40 40 40 40 40 40 40
12: 40 40 40 40 40 40 40 40 40 40 40 40 10 16 16 18 40 40 40 40 40 40 40 40 40
40 40 40 40 40 40 40 40
13: 40 40 40 40 40 40 40 40 40 40 40 40 16 10 18 16 40 40 40 40 40 40 40 40 40
40 40 40 40 40 40 40 40
14: 40 40 40 40 40 40 40 40 40 40 40 40 16 18 10 16 40 40 40 40 40 40 40 40 40
40 40 40 40 40 40 40 40
15: 40 40 40 40 40 40 40 40 40 40 40 40 18 16 16 10 40 40 40 40 40 40 40 40 40
40 40 40 40 40 40 40 40
16: 40 40 40 40 40 40 40 40 40 40 40 40 40 40 10 16 16 18 40 40 40 40 40 40
40 40 40 40 40 40 40 40
17: 40 40 40 40 40 40 40 40 40 40 40 40 40 40 16 10 18 16 40 40 40 40 40 40
40 40 40 40 40 40 40 40
18: 40 40 40 40 40 40 40 40 40 40 40 40 40 40 16 18 10 16 40 40 40 40 40 40
40 40 40 40 40 40 40 40
19: 40 40 40 40 40 40 40 40 40 40 40 40 40 40 18 16 16 10 40 40 40 40 40 40
40 40 40 40 40 40 40 40
20: 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 10 16 16 18 40
40 40 40 40 40 40 40 40
21: 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 16 10 18 16 40
40 40 40 40 40 40 40 40
22: 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 16 18 10 16 40
40 40 40 40 40 40 40 40
23: 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 18 16 16 10 40
40 40 40 40 40 40 40 40
24: 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 10
16 16 18 40 40 40 40
25: 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 16
10 18 16 40 40 40 40
26: 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 16
18 10 16 40 40 40 40
27: 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 18
16 16 10 40 40 40 40
28: 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40
40 40 40 10 16 16 18
29: 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40
40 40 40 16 10 18 16
30: 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40
40 40 40 16 18 10 16
31: 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40 40
40 40 40 18 16 16 10

```

```

-----
9. /proc/meminfo
MemTotal: 33295566648 kB

```

```

-----
10. who -r
run-level 3 Feb 28 12:08

```

```

-----
11. Systemd service manager version: systemd 254 (254.23+suse.141.g9376e684d0)
Default Target Status
multi-user degraded

```

```

-----
12. Failed units, from systemctl list-units --state=failed
UNIT LOAD ACTIVE SUB DESCRIPTION

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200
(2.10 GHz, Intel Xeon Platinum 8454H)

SPECrate®2017_fp_base = 10200

SPECrate®2017_fp_peak = 10500

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2025
Hardware Availability: Apr-2025
Software Availability: Feb-2025

Platform Notes (Continued)

* dcdchkgacefulshutdown.service loaded failed failed Check if previous system shutdown was graceful
* postfix.service loaded failed failed Postfix Mail Transport Agent

13. Services, from systemctl list-unit-files

```

STATE                               UNIT FILES
enabled                             YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd bluetooth chronyd
cpuset_cpunodemap cpuset_memory_spread cron dcd dcdchkgacefulshutdown dcdshutdown
display-manager getty@ hpe-auto-config hpe_irqbalance issue-generator kbdsettings kdump
kdump-early kdump-notify klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog
smartd sshd systemd-pstore vgauthd vmblock-fuse vmtoolsd vsftpd wicked wickedd-auto4
wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime                     systemd-fsck-root systemd-remount-fs
disabled                             accounts-daemon amavis apache2 apache2@ autofs autoyast-initscripts blk-availability
bluetooth-mesh boot-sysctl ca-certificates certmonger chrony-wait clamav-milter clamd
clamonnacc console-getty cups cups-browsed cxl-monitor debug-shell ebttables
exchange-bmc-os-info firewalld fsidd gpm grub2-once haveged ipmi ipmievdr irqbalance
issue-add-ssh-keys kexec-load lunmask man-db-create mariadb mariadb@ multipathd named
ndctl-monitor nfs nfs-blkmap nfs-server nfsserver nmb ostree-remount rpcbind
rpmconfigcheck rsyncd rtkit-daemon smartd_generate_opts smb snmpd snmptrapd spamd spamd
speech-dispatcherd srp_daemon srp_daemon_port@ sysstat systemd-boot-check-no-failures
systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync
systemd-timesyncd tuned udisks2 update-system-flatpaks upower vncserver@ winbind ypbind
indirect                             serial-getty@ systemd-userdbd tftp wickedd

```

14. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.23.38-default
root=UUID=3f2deed0-2789-4a6c-ba7e-4dc1feba6765
rd.auto=1
console=ttyS0,115200n8
selinux=0
security=
splash=silent
mitigations=auto
console=ttyS0,115200
udev.children-max=512
nmi_watchdog=0
uv_nmi.action=kdump
add_efi_memmap
tsc=nowatchdog
earlyprintk=ttyS0,115200
log_buf_len=8M
numa_balancing=disable
pci=norom
crashkernel=3G,high
watchdog_thresh=60
workqueue.watchdog_thresh=120

```

15. cpupower frequency-info

```

analyzing CPU 956:
  current policy: frequency should be within 800 MHz and 3.40 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

  boost state support:
    Supported: yes
    Active: yes

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200
(2.10 GHz, Intel Xeon Platinum 8454H)

SPECrate®2017_fp_base = 10200

SPECrate®2017_fp_peak = 10500

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2025
Hardware Availability: Apr-2025
Software Availability: Feb-2025

Platform Notes (Continued)

16. tuned-adm active

It seems that tuned daemon is not running, preset profile is not activated.
Preset profile: throughput-performance

17. sysctl

```

kernel.numa_balancing      0
kernel.randomize_va_space  2
vm.compaction_proactiveness 20
vm.dirty_background_bytes  0
vm.dirty_background_ratio  10
vm.dirty_bytes             0
vm.dirty_expire_centisecs  3000
vm.dirty_ratio             20
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold       500
vm.min_unmapped_ratio      1
vm.nr_hugepages            0
vm.nr_hugepages_mempolicy  0
vm.nr_overcommit_hugepages 0
vm.swappiness              60
vm.watermark_boost_factor  15000
vm.watermark_scale_factor  10
vm.zone_reclaim_mode       0

```

18. /sys/kernel/mm/transparent_hugepage

```

defrag      always defer+madvise [madvise] never
enabled     [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

```

19. /sys/kernel/mm/transparent_hugepage/khugepaged

```

alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000

```

20. OS release

```

From /etc/*-release /etc/*-version
os-release          SUSE Linux Enterprise Server 15 SP6
hpe-foundation-release HPE Foundation Software 2.5.4, Build 753.1560.241029T0100.a.sles15sp6hpe-241029T0100

```

21. Disk information

```

SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdb2       xfs   5.9T  31G  5.8T  1% /

```

22. /sys/devices/virtual/dmi/id

```

Vendor:      HPE
Product:     Compute Scale-up Server 3200
Product Family: 1590PID03030201

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200

(2.10 GHz, Intel Xeon Platinum 8454H)

SPECrate®2017_fp_base = 10200

SPECrate®2017_fp_peak = 10500

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Apr-2025

Software Availability: Feb-2025

Platform Notes (Continued)

Serial: 5UF424K4VF-000

23. dmidecode

Additional information from dmidecode 3.6 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

344x Hynix HMC94AEBRA123N 64 GB 2 rank 4800, configured at 4400
100x Micron MTC40F2046S1RC48BA1 MHCC 64 GB 2 rank 4800, configured at 4400
68x Micron MTC40F2046S1RC48BA1 MHFF 64 GB 2 rank 4800, configured at 4400

24. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: HPE
BIOS Version: Bundle:1.55.40-20250129_060251 SFW:009.036.009.000.2501270505
BIOS Date: 01/27/2025

Compiler Version Notes

=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
=====

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200
(2.10 GHz, Intel Xeon Platinum 8454H)

SPECrate®2017_fp_base = 10200

SPECrate®2017_fp_peak = 10500

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Apr-2025

Software Availability: Feb-2025

Compiler Version Notes (Continued)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64

507.cactuBSSN_r: -DSPEC_LP64

508.namd_r: -DSPEC_LP64

510.parest_r: -DSPEC_LP64

511.povray_r: -DSPEC_LP64

519.lbm_r: -DSPEC_LP64

521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian

526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char

527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200
(2.10 GHz, Intel Xeon Platinum 8454H)

SPECrate®2017_fp_base = 10200

SPECrate®2017_fp_peak = 10500

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2025
Hardware Availability: Apr-2025
Software Availability: Feb-2025

Base Portability Flags (Continued)

538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200

(2.10 GHz, Intel Xeon Platinum 8454H)

SPECrate®2017_fp_base = 10200

SPECrate®2017_fp_peak = 10500

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Apr-2025

Software Availability: Feb-2025

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapfirerapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200
(2.10 GHz, Intel Xeon Platinum 8454H)

SPECrate®2017_fp_base = 10200

SPECrate®2017_fp_peak = 10500

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2025
Hardware Availability: Apr-2025
Software Availability: Feb-2025

Peak Optimization Flags (Continued)

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

```
554.roms_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SDSS-rev1.0.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SDSS-rev1.0.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200
(2.10 GHz, Intel Xeon Platinum 8454H)

SPECrate®2017_fp_base = 10200

SPECrate®2017_fp_peak = 10500

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2025

Hardware Availability: Apr-2025

Software Availability: Feb-2025

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-02-28 22:47:22-0500.

Report generated on 2025-03-26 10:33:55 by CPU2017 PDF formatter v6716.

Originally published on 2025-03-25.