



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2017\_fp\_base = 1780

PowerEdge M7725 (AMD EPYC 9575F 64-Core Processor)

SPECrate®2017\_fp\_peak = 1780

CPU2017 License: 6573


Test Date: Feb-2025

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2025

Tested by: Dell Inc.

Software Availability: Feb-2025

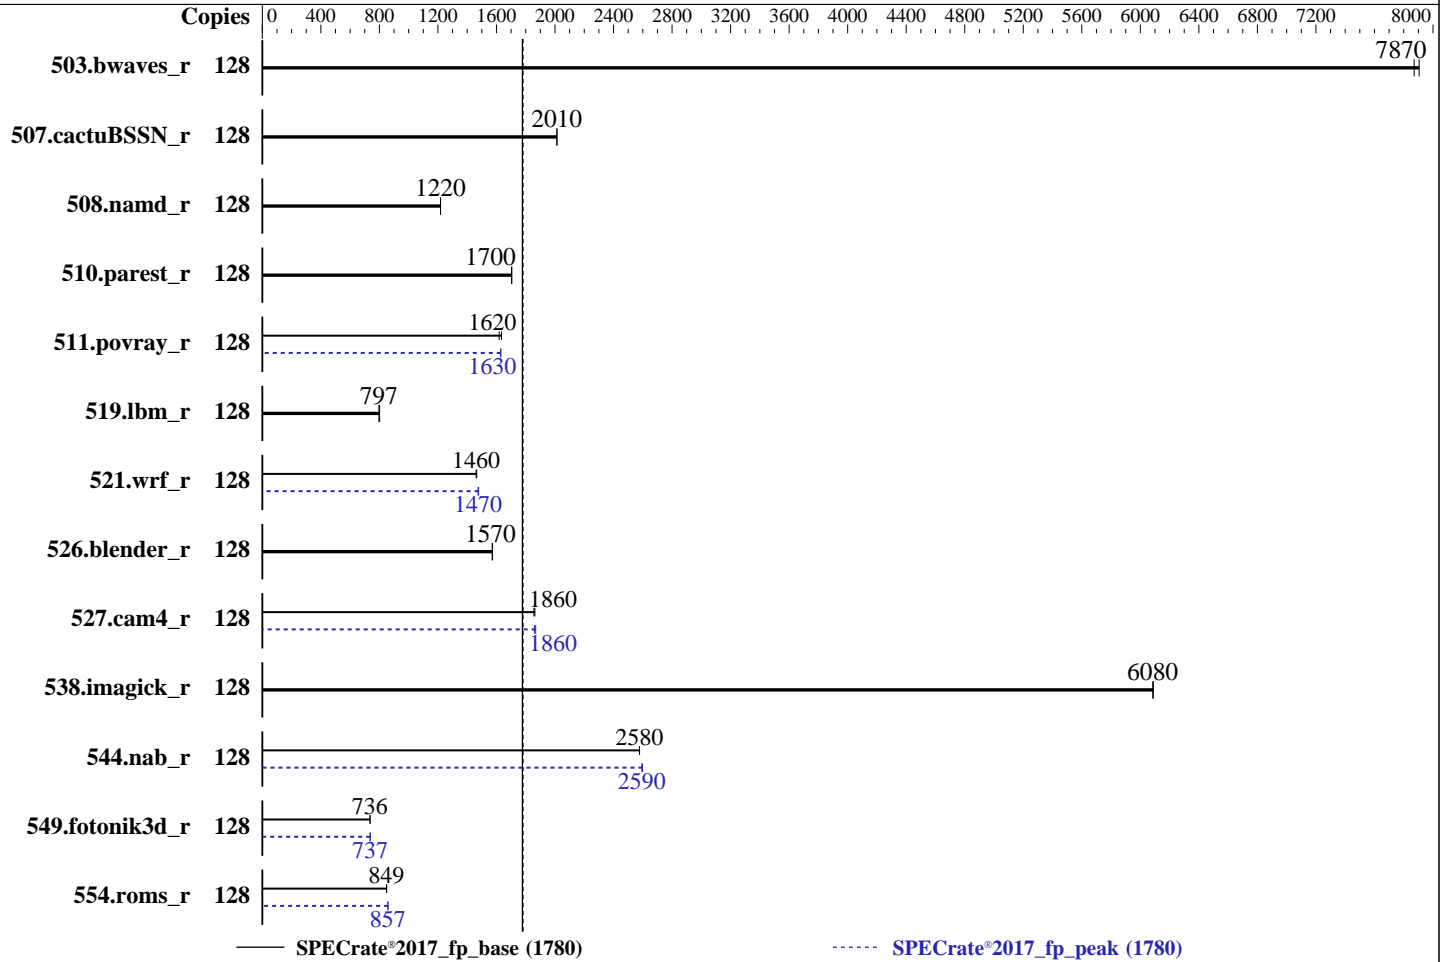

### Hardware

CPU Name: AMD EPYC 9575F  
 Max MHz: 5000  
 Nominal: 3300  
 Enabled: 128 cores, 2 chips  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 256 MB I+D on chip per chip, 32 MB shared / 8 cores  
 Other: None  
 Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-6400B-R)  
 Storage: 80 GB on tmpfs  
 Other: CPU Cooling: DLC

### Software

OS: Ubuntu 24.04.2 LTS  
 6.8.0-53-generic  
 Compiler: C/C++/Fortran: Version 5.0.0 of AOCC  
 Parallel: No  
 Firmware: Version 1.0.0 released Jan-2025  
 File System: tmpfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2017\_fp\_base = 1780

PowerEdge M7725 (AMD EPYC 9575F 64-Core Processor)

SPECrate®2017\_fp\_peak = 1780

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2025

Hardware Availability: Mar-2025

Software Availability: Feb-2025

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	<u>163</u>	<u>7870</u>	162	7910			128	<u>163</u>	<u>7870</u>	162	7910		
507.cactuBSSN_r	128	<u>80.5</u>	<u>2010</u>	80.5	2010			128	<u>80.5</u>	<u>2010</u>	80.5	2010		
508.namd_r	128	99.8	1220	<u>99.9</u>	<u>1220</u>			128	99.8	1220	<u>99.9</u>	<u>1220</u>		
510.parest_r	128	<u>197</u>	<u>1700</u>	196	1700			128	<u>197</u>	<u>1700</u>	196	1700		
511.povray_r	128	183	1630	<u>185</u>	<u>1620</u>			128	<u>183</u>	<u>1630</u>	183	1630		
519.lbm_r	128	168	802	<u>169</u>	<u>797</u>			128	168	802	<u>169</u>	<u>797</u>		
521.wrf_r	128	196	1460	<u>196</u>	<u>1460</u>			128	<u>194</u>	<u>1470</u>	194	1480		
526.blender_r	128	124	1570	<u>124</u>	<u>1570</u>			128	124	1570	<u>124</u>	<u>1570</u>		
527.cam4_r	128	<u>121</u>	<u>1860</u>	120	1860			128	120	1870	<u>120</u>	<u>1860</u>		
538.imagick_r	128	52.3	6090	<u>52.3</u>	<u>6080</u>			128	52.3	6090	<u>52.3</u>	<u>6080</u>		
544.nab_r	128	<u>83.6</u>	<u>2580</u>	83.6	2580			128	82.9	2600	<u>83.1</u>	<u>2590</u>		
549.fotonik3d_r	128	<u>678</u>	<u>736</u>	678	736			128	677	737	<u>677</u>	<u>737</u>		
554.roms_r	128	<u>239</u>	<u>849</u>	239	849			128	237	859	<u>237</u>	<u>857</u>		

SPECrate®2017\_fp\_base = 1780

SPECrate®2017\_fp\_peak = 1780

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 1780

PowerEdge M7725 (AMD EPYC 9575F 64-Core Processor)

SPECrate®2017\_fp\_peak = 1780

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Feb-2025  
Hardware Availability: Mar-2025  
Software Availability: Feb-2025

## Operating System Notes (Continued)

'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH =  
"/mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5\_A1/amd\_rate\_aocc500\_znver5\_A\_lib/lib:/mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5\_A1/amd\_rate\_aocc500\_znver5\_A\_lib/lib32:"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 80 GB ramdisk created with the cmd: "mount -t tmpfs -o size=80G tmpfs /mnt/ramdisk"

## Platform Notes

BIOS Settings:

Logical Processor : Disabled  
Virtualization Technology : Disabled  
NUMA Nodes Per Socket : 4

System Profile : Custom  
C-States : Disabled  
Memory Patrol Scrub : Disabled  
PCI ASPM L1 Link Power Management : Disabled  
Periodic Directory Rinse Tuning : Blended  
Determinism Control : Manual  
Determinism Slider : Power Determinism  
Optimizer Mode : Enabled  
Adaptive Allocation : Enabled  
Dram Refresh Delay : Performance  
DIMM Self Healing -  
on Uncorrectable Memory Error : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5\_A1/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on M772501-M7725 Fri Feb 28 16:50:28 2025

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2017\_fp\_base = 1780

PowerEdge M7725 (AMD EPYC 9575F 64-Core Processor)

SPECrate®2017\_fp\_peak = 1780

**CPU2017 License:** 6573

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Feb-2025

**Hardware Availability:** Mar-2025

**Software Availability:** Feb-2025

## Platform Notes (Continued)

- ```

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 255 (255.4-lubuntu8.5)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

```

```

1. uname -a
Linux M772501-M7725 6.8.0-53-generic #55-Ubuntu SMP PREEMPT_DYNAMIC Fri Jan 17 15:37:52 UTC 2025 x86_64
x86_64 x86_64 GNU/Linux

```

```

2. w
16:50:28 up 31 min, 2 users, load average: 0.21, 0.06, 0.01
USER      TTY      FROM          LOGIN@      IDLE        JCPU      PCPU      WHAT
root     tty1      -             16:48      42.00s     1.05s     0.32s     /bin/bash ./amd_rate_aocc500_znver5_A1.sh
root     tty2      -             16:48      56.00s     0.04s     ?         -bash

```

```

3. Username
From environment variable $USER: root

```

```

4. ulimit -a
time(seconds)      unlimited
file(blocks)       unlimited
data(kbytes)       unlimited
stack(kbytes)      unlimited
coredump(blocks)   0
memory(kbytes)     unlimited
locked memory(kbytes) 2097152
process            6189325
nofiles            1024
vmemory(kbytes)    unlimited
locks              unlimited
rtprio             0

```

```

5. sysinfo process ancestry
/sbin/init

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2017\_fp\_base = 1780

PowerEdge M7725 (AMD EPYC 9575F 64-Core Processor)

SPECrate®2017\_fp\_peak = 1780

**CPU2017 License:** 6573

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Feb-2025

**Hardware Availability:** Mar-2025

**Software Availability:** Feb-2025

## Platform Notes (Continued)

```

/bin/login -p --
-bash
/bin/bash /home/DellFiles/bin/DELL_rate.sh
/bin/bash /home/DellFiles/bin/dell-run-main.sh rate
/bin/bash /home/DellFiles/bin/dell-run-main.sh rate
/bin/bash /home/DellFiles/bin/AMD/dell-run-speccpu.sh rate --define DL-VERS=6.1a --output_format
html, pdf, txt
python3 ./run_amd_rate_aocc500_znver5_A1.py
/bin/bash ./amd_rate_aocc500_znver5_A1.sh
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 2 --define DL-BIOS-NPS=4
--define DL-VERS=6.1a --output_format html, pdf, txt fprate
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 2 --define
DL-BIOS-NPS=4 --define DL-VERS=6.1a --output_format html, pdf, txt --nopower --runmode rate --tune base:peak
--size test:train:refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/temlogs/preenv.fprate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1

```

```

-----
6. /proc/cpuinfo
model name      : AMD EPYC 9575F 64-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 26
model          : 2
stepping       : 1
microcode      : 0xb00211e
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size      : 192 4K pages
cpu cores     : 64
siblings      : 64
2 physical ids (chips)
128 processors (hardware threads)
physical id 0: core ids 0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119
physical id 1: core ids 0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119
physical id 0: apicids 0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119
physical id 1: apicids 128-135,144-151,160-167,176-183,192-199,208-215,224-231,240-247
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

### 7. lscpu

From lscpu from util-linux 2.39.3:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                128
On-line CPU(s) list:   0-127
Vendor ID:             AuthenticAMD
BIOS Vendor ID:        AMD
Model name:            AMD EPYC 9575F 64-Core Processor
BIOS Model name:       AMD EPYC 9575F 64-Core Processor
BIOS CPU family:       107
CPU family:            26
Model:                 2
Thread(s) per core:    1
Core(s) per socket:    64
Socket(s):             2
Stepping:              1

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2017\_fp\_base = 1780

PowerEdge M7725 (AMD EPYC 9575F 64-Core Processor)

SPECrate®2017\_fp\_peak = 1780

**CPU2017 License:** 6573  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Feb-2025  
**Hardware Availability:** Mar-2025  
**Software Availability:** Feb-2025

### Platform Notes (Continued)

```

Frequency boost:          enabled
CPU(s) scaling MHz:      67%
CPU max MHz:             5008.0068
CPU min MHz:             1500.0000
BogoMIPS:                6590.39
Flags:                   fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                          pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                          rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                          extd_apicid aperfmpperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                          sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                          cmp_legacy extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                          osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpxext
                          perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                          ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmil avx2
                          smep bmi2 invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                          avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                          xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                          cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
                          xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock
                          nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
                          pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi
                          avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
                          avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
                          movdiri movdir64b overflow_recov succor smca avx512_vp2intersect
                          flush_lld debug_swap
Lld cache:               6 MiB (128 instances)
L1i cache:               4 MiB (128 instances)
L2 cache:                128 MiB (128 instances)
L3 cache:                512 MiB (16 instances)
NUMA node(s):            8
NUMA node0 CPU(s):      0-15
NUMA node1 CPU(s):      16-31
NUMA node2 CPU(s):      32-47
NUMA node3 CPU(s):      48-63
NUMA node4 CPU(s):      64-79
NUMA node5 CPU(s):      80-95
NUMA node6 CPU(s):      96-111
NUMA node7 CPU(s):      112-127
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:       Not affected
Vulnerability L1tf:                Not affected
Vulnerability Mds:                 Not affected
Vulnerability Meltdown:            Not affected
Vulnerability Mmio stale data:     Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:            Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass:   Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:          Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:          Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
                                  disabled; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected
Vulnerability Srbds:               Not affected
Vulnerability Tsx async abort:     Not affected

```

From lscpu --cache:

| NAME | ONE-SIZE | ALL-SIZE | WAYS | TYPE        | LEVEL | SETS  | PHY-LINE | COHERENCY-SIZE |
|------|----------|----------|------|-------------|-------|-------|----------|----------------|
| L1d  | 48K      | 6M       | 12   | Data        | 1     | 64    | 1        | 64             |
| L1i  | 32K      | 4M       | 8    | Instruction | 1     | 64    | 1        | 64             |
| L2   | 1M       | 128M     | 16   | Unified     | 2     | 1024  | 1        | 64             |
| L3   | 32M      | 512M     | 16   | Unified     | 3     | 32768 | 1        | 64             |

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 1780

PowerEdge M7725 (AMD EPYC 9575F 64-Core Processor)

SPECrate®2017\_fp\_peak = 1780

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2025

Hardware Availability: Mar-2025

Software Availability: Feb-2025

## Platform Notes (Continued)

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0-15
node 0 size: 192799 MB
node 0 free: 192250 MB
node 1 cpus: 16-31
node 1 size: 193528 MB
node 1 free: 193213 MB
node 2 cpus: 32-47
node 2 size: 193528 MB
node 2 free: 193231 MB
node 3 cpus: 48-63
node 3 size: 193512 MB
node 3 free: 193195 MB
node 4 cpus: 64-79
node 4 size: 193528 MB
node 4 free: 193248 MB
node 5 cpus: 80-95
node 5 size: 193485 MB
node 5 free: 193197 MB
node 6 cpus: 96-111
node 6 size: 193528 MB
node 6 free: 188321 MB
node 7 cpus: 112-127
node 7 size: 193493 MB
node 7 free: 193193 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10 12 12 12 32 32 32 32
1:  12 10 12 12 32 32 32 32
2:  12 12 10 12 32 32 32 32
3:  12 12 12 10 32 32 32 32
4:  32 32 32 32 10 12 12 12
5:  32 32 32 32 12 10 12 12
6:  32 32 32 32 12 12 10 12
7:  32 32 32 32 12 12 12 10

```

9. /proc/meminfo

MemTotal: 1584542072 kB

10. who -r

run-level 3 Feb 28 16:19

11. Systemd service manager version: systemd 255 (255.4-lubuntu8.5)

| Default Target | Status  |
|----------------|---------|
| multi-user     | running |

12. Services, from systemctl list-unit-files

| STATE   | UNIT FILES                                                                                                                                                                                                                                                                                                                                    |
|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| enabled | ModemManager apparmor appport blk-availability cloud-config cloud-final cloud-init cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager grub-common grub-initrd-fallback keyboard-setup lm-sensors lvm2-monitor multipathd networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog secureboot-db setvtrgb |

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2017\_fp\_base = 1780

PowerEdge M7725 (AMD EPYC 9575F 64-Core Processor)

SPECrate®2017\_fp\_peak = 1780

**CPU2017 License:** 6573

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Feb-2025

**Hardware Availability:** Mar-2025

**Software Availability:** Feb-2025

### Platform Notes (Continued)

```

enabled-runtime  sysstat systemd-networkd systemd-networkd-wait-online systemd-pstore systemd-resolved
disabled         systemd-timesyncd thermald tuned ua-reboot-cmds ubuntu-advantage udisks2 ufw vgauth
                 netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
                 console-getty debug-shell iscsid nftables rsync serial-getty@ ssh
                 systemd-boot-check-no-failures systemd-confext systemd-network-generator
                 systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code
                 systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy
                 systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysext
                 systemd-time-wait-sync upower
indirect         systemd-sysupdate systemd-sysupdate-reboot uuid
masked          cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/vmlinuz-6.8.0-53-generic
root=/dev/mapper/ubuntu--vg-ubuntu--lv
ro

```

```

-----
14. cpupower frequency-info
analyzing CPU 31:
  current policy: frequency should be within 1.50 GHz and 3.30 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

  boost state support:
    Supported: yes
    Active: yes
    Boost States: 0
    Total States: 3
    Pstate-P0: 3300MHz

```

```

-----
15. tuned-adm active
  Current active profile: latency-performance

```

```

-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      3
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           1

```

```

-----
17. /sys/kernel/mm/transparent_hugepage
defrag      [always] defer defer+madvise madvise never

```

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2017\_fp\_base = 1780

PowerEdge M7725 (AMD EPYC 9575F 64-Core Processor)

SPECrate®2017\_fp\_peak = 1780

**CPU2017 License:** 6573

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Feb-2025

**Hardware Availability:** Mar-2025

**Software Availability:** Feb-2025

## Platform Notes (Continued)

```

enabled          [always] madvise never
hpage_pmd_size   2097152
shmem_enabled    always within_size advise [never] deny force

```

```

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000

```

```

-----
19. OS release
From /etc/*-release /etc/*-version
os-release Ubuntu 24.04.2 LTS

```

```

-----
20. Disk information
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1
Filesystem      Type  Size  Used Avail Use% Mounted on
tmpfs           tmpfs 80G   3.3G   77G   5% /mnt/ramdisk

```

```

-----
21. /sys/devices/virtual/dmi/id
Vendor:         Dell Inc.
Product:        PowerEdge M7725
Product Family: PowerEdge
Serial:         M772501

```

```

-----
22. dmidecode
Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
7x 802C0000802C MTC40F2046S1RC64BD1 64 GB 2 rank 6400
9x 80AD000080AD HMC94AHBRA277N 64 GB 2 rank 6400
2x 80AD000080AD HMC94AHBRA480N 64 GB 2 rank 6400
6x 80CE000080CE M321R8GA0PB2-CCPKC 64 GB 2 rank 6400

```

```

-----
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      Dell Inc.
BIOS Version:     1.0.0
BIOS Date:        01/23/2025
BIOS Revision:    1.0

```

## Compiler Version Notes

```

=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
=====

```

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 1780

PowerEdge M7725 (AMD EPYC 9575F 64-Core Processor)

SPECrate®2017\_fp\_peak = 1780

**CPU2017 License:** 6573  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Feb-2025  
**Hardware Availability:** Mar-2025  
**Software Availability:** Feb-2025

## Compiler Version Notes (Continued)

Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====  
C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)  
=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====  
C++, C | 511.povray\_r(base, peak) 526.blender\_r(base, peak)  
=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base, peak)  
=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====  
Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base, peak)  
=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====  
Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)  
=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Dell Inc.**

SPECrate®2017\_fp\_base = 1780

PowerEdge M7725 (AMD EPYC 9575F 64-Core Processor)

SPECrate®2017\_fp\_peak = 1780

**CPU2017 License:** 6573

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Feb-2025

**Hardware Availability:** Mar-2025

**Software Availability:** Feb-2025

## Compiler Version Notes (Continued)

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64  
526.blender\_r: -funsigned-char -DSPEC\_LP64  
527.cam4\_r: -DSPEC\_CASE\_FLAG -DSPEC\_LP64  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 1780

PowerEdge M7725 (AMD EPYC 9575F 64-Core Processor)

SPECrate®2017\_fp\_peak = 1780

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2025

Hardware Availability: Mar-2025

Software Availability: Feb-2025

## Base Optimization Flags

### C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl
```

### C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl
```

### Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc
-lflang -ldl
```

### Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions
-lamdlibm -lamdalloc -lflang -ldl
```

### Benchmarks using both C and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 1780

PowerEdge M7725 (AMD EPYC 9575F 64-Core Processor)

SPECrate®2017\_fp\_peak = 1780

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2025

Hardware Availability: Mar-2025

Software Availability: Feb-2025

## Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):

```
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang
-ldl
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions
-lamdlibm -lamdalloc -lflang -ldl
```

## Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 1780

PowerEdge M7725 (AMD EPYC 9575F 64-Core Processor)

SPECrate®2017\_fp\_peak = 1780

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2025

Hardware Availability: Mar-2025

Software Availability: Feb-2025

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: basepeak = yes

538.imagick\_r: basepeak = yes

544.nab\_r: -m64 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand  
-fenable-aggressive-gather -Ofast -march=znver5  
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7  
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm  
-landalloc -ldl

C++ benchmarks:

508.namd\_r: basepeak = yes

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 1780

PowerEdge M7725 (AMD EPYC 9575F 64-Core Processor)

SPECrate®2017\_fp\_peak = 1780

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2025

Hardware Availability: Mar-2025

Software Availability: Feb-2025

## Peak Optimization Flags (Continued)

510.parest\_r: basepeak = yes

Fortran benchmarks:

503.bwaves\_r: basepeak = yes

549.fotonik3d\_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto  
-Mrecursive -mllvm -reduce-array-computations=3  
-fepilog-vectorization-of-inductions -fvector-transform  
-fscalar-transform -lamdlibm -lamdalloc -ldl -lflang

554.roms\_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto  
-Mrecursive -mllvm -reduce-array-computations=3  
-fepilog-vectorization-of-inductions -zopt -lamdlibm  
-lamdalloc -ldl -lflang

Benchmarks using both Fortran and C:

521.wrf\_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto  
-fstruct-layout=7 -mllvm -unroll-threshold=50  
-fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -zopt -Mrecursive  
-funroll-loops -mllvm -lsr-in-nested-loop  
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc  
-ldl -lflang

527.cam4\_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast  
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto  
-fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays  
-mllvm -reduce-array-computations=3 -zopt -Mrecursive  
-funroll-loops -mllvm -lsr-in-nested-loop  
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc  
-ldl -lflang

Benchmarks using both C and C++:

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 1780

PowerEdge M7725 (AMD EPYC 9575F 64-Core Processor)

SPECrate®2017\_fp\_peak = 1780

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2025

Hardware Availability: Mar-2025

Software Availability: Feb-2025

## Peak Optimization Flags (Continued)

```

511.povray_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -lamdlibm
-lamdalloc -ldl

```

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN\_r: basepeak = yes

## Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.8.html>





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Dell Inc.**

SPECrate®2017\_fp\_base = 1780

PowerEdge M7725 (AMD EPYC 9575F 64-Core Processor)

SPECrate®2017\_fp\_peak = 1780

**CPU2017 License:** 6573

**Test Date:** Feb-2025

**Test Sponsor:** Dell Inc.

**Hardware Availability:** Mar-2025

**Tested by:** Dell Inc.

**Software Availability:** Feb-2025

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.8.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2025-02-28 11:50:28-0500.

Report generated on 2025-03-26 10:35:35 by CPU2017 PDF formatter v6716.

Originally published on 2025-03-25.