



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 330

PowerEdge R470 (Intel Xeon 6781P)

SPECspeed®2017\_fp\_peak = 331

CPU2017 License: 6573


Test Date: Mar-2025

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2025

Tested by: Dell Inc.

Software Availability: Jun-2024

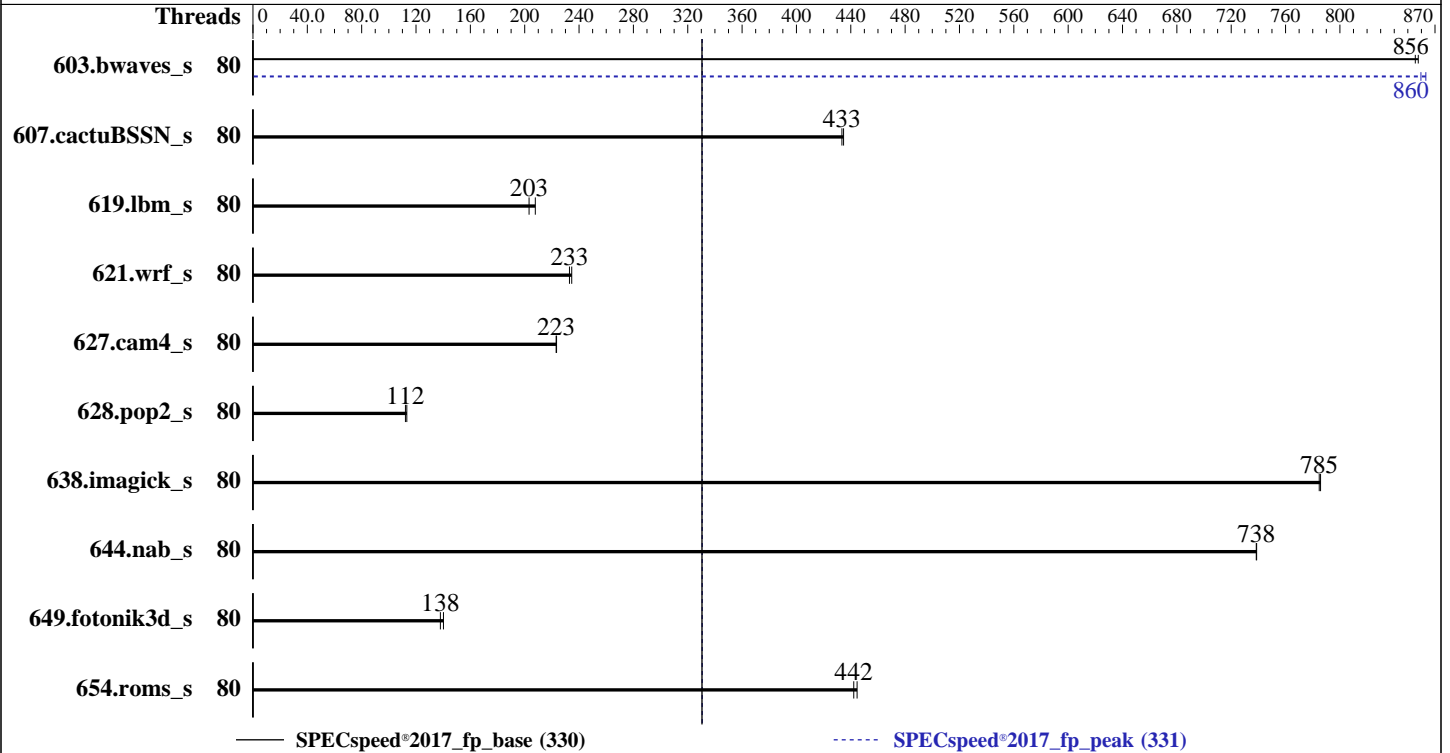

### Hardware

CPU Name: Intel Xeon 6781P  
 Max MHz: 3800  
 Nominal: 2000  
 Enabled: 80 cores, 1 chip  
 Orderable: 1 chip  
 Cache L1: 64 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 336 MB I+D on chip per chip  
 Other: None  
 Memory: 256 GB (8 x 32 GB 2Rx8 PC5-6400B-R)  
 Storage: 70 GB on tmpfs  
 Other: CPU Cooling: Air

### Software

OS: SUSE Linux Enterprise Server 15 SP6  
 6.4.0-150600.21-default  
 Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++  
 Compiler for Linux;  
 Fortran: Version 2024.1 of Intel Fortran Compiler  
 for Linux;  
 Parallel: Yes  
 Firmware: Version 1.2.6 released Feb-2025  
 File System: tmpfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS set to prefer performance at the cost of  
 additional power usage.



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 330

PowerEdge R470 (Intel Xeon 6781P)

SPECspeed®2017\_fp\_peak = 331

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Mar-2025  
Hardware Availability: Mar-2025  
Software Availability: Jun-2024

## Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	80	<b>69.0</b>	<b>856</b>	68.8	858			80	<b>68.6</b>	<b>860</b>	68.3	863		
607.cactuBSSN_s	80	38.3	435	<b>38.5</b>	<b>433</b>			80	38.3	435	<b>38.5</b>	<b>433</b>		
619.lbm_s	80	25.2	208	<b>25.8</b>	<b>203</b>			80	25.2	208	<b>25.8</b>	<b>203</b>		
621.wrf_s	80	<b>56.8</b>	<b>233</b>	56.4	235			80	<b>56.8</b>	<b>233</b>	56.4	235		
627.cam4_s	80	39.7	223	<b>39.7</b>	<b>223</b>			80	39.7	223	<b>39.7</b>	<b>223</b>		
628.pop2_s	80	105	113	<b>106</b>	<b>112</b>			80	105	113	<b>106</b>	<b>112</b>		
638.imagick_s	80	<b>18.4</b>	<b>785</b>	18.4	786			80	<b>18.4</b>	<b>785</b>	18.4	786		
644.nab_s	80	23.7	739	<b>23.7</b>	<b>738</b>			80	23.7	739	<b>23.7</b>	<b>738</b>		
649.fotonik3d_s	80	65.0	140	<b>66.1</b>	<b>138</b>			80	65.0	140	<b>66.1</b>	<b>138</b>		
654.roms_s	80	35.4	445	<b>35.6</b>	<b>442</b>			80	35.4	445	<b>35.6</b>	<b>442</b>		

SPECspeed®2017\_fp\_base = 330

SPECspeed®2017\_fp\_peak = 331

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
KMP\_AFFINITY = "granularity=fine,compact"  
LD\_LIBRARY\_PATH =  
"/mnt/ramdisk/cpu2017-1.1.9-ic2024.1/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2024.1/je5.0.1-64"  
MALLOCONF = "retain:true"  
OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Redhat Enterprise Linux 8.0  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
jemalloc, a general purpose malloc implementation built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 70 GB ramdisk created with the cmd: "mount -t tmpfs -o size=70G tmpfs /mnt/ramdisk"



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 330

PowerEdge R470 (Intel Xeon 6781P)

SPECspeed®2017\_fp\_peak = 331

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

## Platform Notes

### BIOS Settings:

Logical Processor : Disabled  
 Sub NUMA Cluster : Enabled  
 LLC Prefetch : Enabled  
 Optimizer Mode : Enabled

System Profile : Custom  
 CPU Power Management : Maximum Performance  
 Energy Efficient Turbo : Disabled  
 C1E : Disabled  
 C-States : Autonomous  
 Latency Optimized Mode : Enabled  
 Energy Efficient Policy : Performance  
 CPU Interconnect Bus -  
 Link Power Management : Disabled  
 PCI ASPM L1 Link Power Management : Disabled  
 DIMM Self Healing -  
 on Uncorrectable Memory Error : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2024.1/bin/sysinfo  
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
 running on AFN4705-R470 Sat Mar 1 09:43:22 2025

SUT (System Under Test) info as seen by some common utilities.

### Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent\_hugepage
17. /sys/kernel/mm/transparent\_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

1. uname -a  
 Linux AFN4705-R470 6.4.0-150600.21-default #1 SMP PREEMPT\_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)  
 x86\_64 x86\_64 x86\_64 GNU/Linux

2. w

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 330

PowerEdge R470 (Intel Xeon 6781P)

SPECspeed®2017\_fp\_peak = 331

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Mar-2025  
Hardware Availability: Mar-2025  
Software Availability: Jun-2024

## Platform Notes (Continued)

```
09:43:22 up 2:18, 1 user, load average: 6.26, 5.59, 3.30
USER  TTY  FROM          LOGIN@  IDLE   JCPU   PCPU WHAT
root  tty1  -             07:26  2:15m 0.90s  0.00s /bin/bash
/home/DellFiles/bin/Intel/dell-run-speccpu.sh speed --define DL-VERS=6.1a --output_format html,pdf,txt
```

3. Username  
From environment variable \$USER: root

4. ulimit -a

core file size	(blocks, -c)	unlimited
data seg size	(kbytes, -d)	unlimited
scheduling priority	(-e)	0
file size	(blocks, -f)	unlimited
pending signals	(-i)	1030184
max locked memory	(kbytes, -l)	8192
max memory size	(kbytes, -m)	unlimited
open files	(-n)	1024
pipe size	(512 bytes, -p)	8
POSIX message queues	(bytes, -q)	819200
real-time priority	(-r)	0
stack size	(kbytes, -s)	unlimited
cpu time	(seconds, -t)	unlimited
max user processes	(-u)	1030184
virtual memory	(kbytes, -v)	unlimited
file locks	(-x)	unlimited

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
/bin/bash /home/DellFiles/bin/DELL_speed.sh
/bin/bash /home/DellFiles/bin/dell-run-main.sh speed
/bin/bash /home/DellFiles/bin/dell-run-main.sh speed
/bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh speed --define DL-VERS=6.1a --output_format html,pdf,txt
/bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh speed --define DL-VERS=6.1a --output_format html,pdf,txt
runcpu --nobuild --action validate --define default-platform-flags -c
ic2024.1-lin-sapphirerapids-speed-20240308.cfg --define cores=80 --tune base,peak -o all --define drop_caches --iterations 2 --define DL-VERS=6.1a --output_format html,pdf,txt fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
ic2024.1-lin-sapphirerapids-speed-20240308.cfg --define cores=80 --tune base,peak --output_format all
--define drop_caches --iterations 2 --define DL-VERS=6.1a --output_format html,pdf,txt --nopower --runmode
speed --tune base:peak --size refspeed fpspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.002/templogs/preenv.fpspeed.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2024.1
```

6. /proc/cpuinfo

model name	: Intel(R) Xeon(R) 6781P
vendor_id	: GenuineIntel
cpu family	: 6
model	: 173
stepping	: 1
microcode	: 0xa0000c0
bugs	: spectre_v1 spectre_v2 spec_store_bypass swapgs bhi

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 330

PowerEdge R470 (Intel Xeon 6781P)

SPECspeed®2017\_fp\_peak = 331

CPU2017 License: 6573

Test Date: Mar-2025

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2025

Tested by: Dell Inc.

Software Availability: Jun-2024

## Platform Notes (Continued)

```

cpu cores      : 80
siblings      : 80
1 physical ids (chips)
80 processors (hardware threads)
physical id 0: core ids 0-39,64-103
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
,74,76,78,128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174
,176,178,180,182,184,186,188,190,192,194,196,198,200,202,204,206
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

### 7. lscpu

From lscpu from util-linux 2.39.3:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                80
On-line CPU(s) list:   0-79
Vendor ID:             GenuineIntel
BIOS Vendor ID:       Intel
Model name:            Intel(R) Xeon(R) 6781P
BIOS Model name:      Intel(R) Xeon(R) 6781P  CPU @ 2.0GHz
BIOS CPU family:      179
CPU family:           6
Model:                173
Thread(s) per core:   1
Core(s) per socket:   80
Socket(s):             1
Stepping:              1
BogoMIPS:              4000.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
vpid ept_ad fsgsbase tsc_adjust bml hle avx2 smep bmi2 erms invpcid
rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
arat pln pts hfi vnni avx512vbmi umip pku ospke waitpkg avx512_vbmi2
gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq
la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm
md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16
amx_tile amx_int8 flush_lld arch_capabilities
Virtualization:       VT-x
L1d cache:            3.8 MiB (80 instances)
L1i cache:            5 MiB (80 instances)
L2 cache:             160 MiB (80 instances)
L3 cache:             336 MiB (1 instance)
NUMA node(s):         2
NUMA node0 CPU(s):   0-39

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 330

PowerEdge R470 (Intel Xeon 6781P)

SPECspeed®2017\_fp\_peak = 331

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Mar-2025  
Hardware Availability: Mar-2025  
Software Availability: Jun-2024

## Platform Notes (Continued)

```

NUMA node1 CPU(s):          40-79
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability Lltf:        Not affected
Vulnerability Mds:         Not affected
Vulnerability Meltdown:    Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:    Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:   Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:   Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
                             PBRSE-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds:       Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3.8M	12	Data	1	64	1	64
L1i	64K	5M	16	Instruction	1	64	1	64
L2	2M	160M	16	Unified	2	2048	1	64
L3	336M	336M	16	Unified	3	344064	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0-39
node 0 size: 128580 MB
node 0 free: 116055 MB
node 1 cpus: 40-79
node 1 size: 128992 MB
node 1 free: 123896 MB
node distances:
node  0  1
  0: 10 12
  1: 12 10

```

9. /proc/meminfo

MemTotal: 263754144 kB

10. who -r

run-level 3 Mar 1 07:25

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

Default Target Status  
multi-user running

12. Services, from systemctl list-unit-files

```

STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager firewalld getty@
irqbalance issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections
nvmf-autoconnect postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wickd
wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 330

PowerEdge R470 (Intel Xeon 6781P)

SPECspeed®2017\_fp\_peak = 331

CPU2017 License: 6573

Test Date: Mar-2025

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2025

Tested by: Dell Inc.

Software Availability: Jun-2024

## Platform Notes (Continued)

```

disabled      autofsd autofast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
              chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info fsidd
              gpm grub2-once haveged ipmi ipmievd issue-add-ssh-keys kexec-load lunmask man-db-create
              multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts
              snmpd snmptrapd synce4l systemd-boot-check-no-failures systemd-confext
              systemd-network-generator systemd-sysexit systemd-time-wait-sync systemd-timesyncd udisks2
              vncserver@
indirect      systemd-userdbd wickedd

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=7a4347a0-f3fa-42de-807b-17892652255e
splash=silent
mitigations=auto
quiet
security=apparmor

```

```

-----
14. cpupower frequency-info
analyzing CPU 63:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes

```

```

-----
15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space     2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                  60
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          0

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag      always defer defer+madvice [madvice] never
enabled    [always] madvice never
hpage_pmd_size  2097152
shmem_enabled  always within_size advise [never] deny force

```

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 330

PowerEdge R470 (Intel Xeon 6781P)

SPECspeed®2017\_fp\_peak = 331

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Mar-2025  
Hardware Availability: Mar-2025  
Software Availability: Jun-2024

## Platform Notes (Continued)

max\_ptes\_shared 256  
max\_ptes\_swap 64  
pages\_to\_scan 4096  
scan\_sleep\_millisecs 10000

-----  
18. OS release  
From /etc/\*-release /etc/\*-version  
os-release SUSE Linux Enterprise Server 15 SP6

-----  
19. Disk information  
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2024.1  
Filesystem Type Size Used Avail Use% Mounted on  
tmpfs tmpfs 70G 11G 60G 16% /mnt/ramdisk

-----  
20. /sys/devices/virtual/dmi/id  
Vendor: Dell Inc.  
Product: PowerEdge R470  
Product Family: PowerEdge  
Serial: AFN4705

-----  
21. dmidecode  
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.  
Memory:  
8x 00AD063200AD HMC88AHBRA286N 32 GB 2 rank 6400

-----  
22. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: Dell Inc.  
BIOS Version: 1.2.6  
BIOS Date: 02/26/2025  
BIOS Revision: 1.2

## Compiler Version Notes

=====  
C | 619.lbm\_s(base, peak) 638.imagick\_s(base, peak) 644.nab\_s(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====  
C++, C, Fortran | 607.cactuBSSN\_s(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

(Continued on next page)





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 330

PowerEdge R470 (Intel Xeon 6781P)

SPECspeed®2017\_fp\_peak = 331

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Mar-2025  
Hardware Availability: Mar-2025  
Software Availability: Jun-2024

## Compiler Version Notes (Continued)

-----  
Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak) 654.roms\_s(base, peak)  
-----

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
-----

-----  
Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak) 628.pop2\_s(base, peak)  
-----

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:  
icx

Fortran benchmarks:  
ifx

Benchmarks using both Fortran and C:  
ifx icx

Benchmarks using Fortran, C, and C++:  
icpx icx ifx

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64  
607.cactuBSSN\_s: -DSPEC\_LP64  
619.lbm\_s: -DSPEC\_LP64  
621.wrf\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
627.cam4\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
628.pop2\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
-assume byterecl  
638.imagick\_s: -DSPEC\_LP64  
644.nab\_s: -DSPEC\_LP64  
649.fotonik3d\_s: -DSPEC\_LP64  
654.roms\_s: -DSPEC\_LP64



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 330

PowerEdge R470 (Intel Xeon 6781P)

SPECspeed®2017\_fp\_peak = 331

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017\_fp\_base = 330

PowerEdge R470 (Intel Xeon 6781P)

SPECSpeed®2017\_fp\_peak = 331

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

619.lbm\_s: basepeak = yes

638.imagick\_s: basepeak = yes

644.nab\_s: basepeak = yes

Fortran benchmarks:

603.bwaves\_s: -w -m64 -Wl,-z,muldefs -DSPEC\_OPENMP -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs -align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

649.fotonik3d\_s: basepeak = yes

654.roms\_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf\_s: basepeak = yes

627.cam4\_s: basepeak = yes

628.pop2\_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.13.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.13.xml>



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 330

PowerEdge R470 (Intel Xeon 6781P)

SPECspeed®2017\_fp\_peak = 331

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2025-03-01 09:43:22-0500.  
Report generated on 2025-03-28 09:23:34 by CPU2017 PDF formatter v6716.  
Originally published on 2025-03-27.