SPEChpc™ 2021 Small Result

xFusion

xFusion FusionServer 2288H V7 (Intel Xeon Platinum 8490H)

SPEChpc 2021_sml_base = 1.08

SPEChpc 2021_sml_peak = 1.11

hpc2021 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Dec-2023
Hardware Availability: Jan-2023
Software Availability: Apr-2023

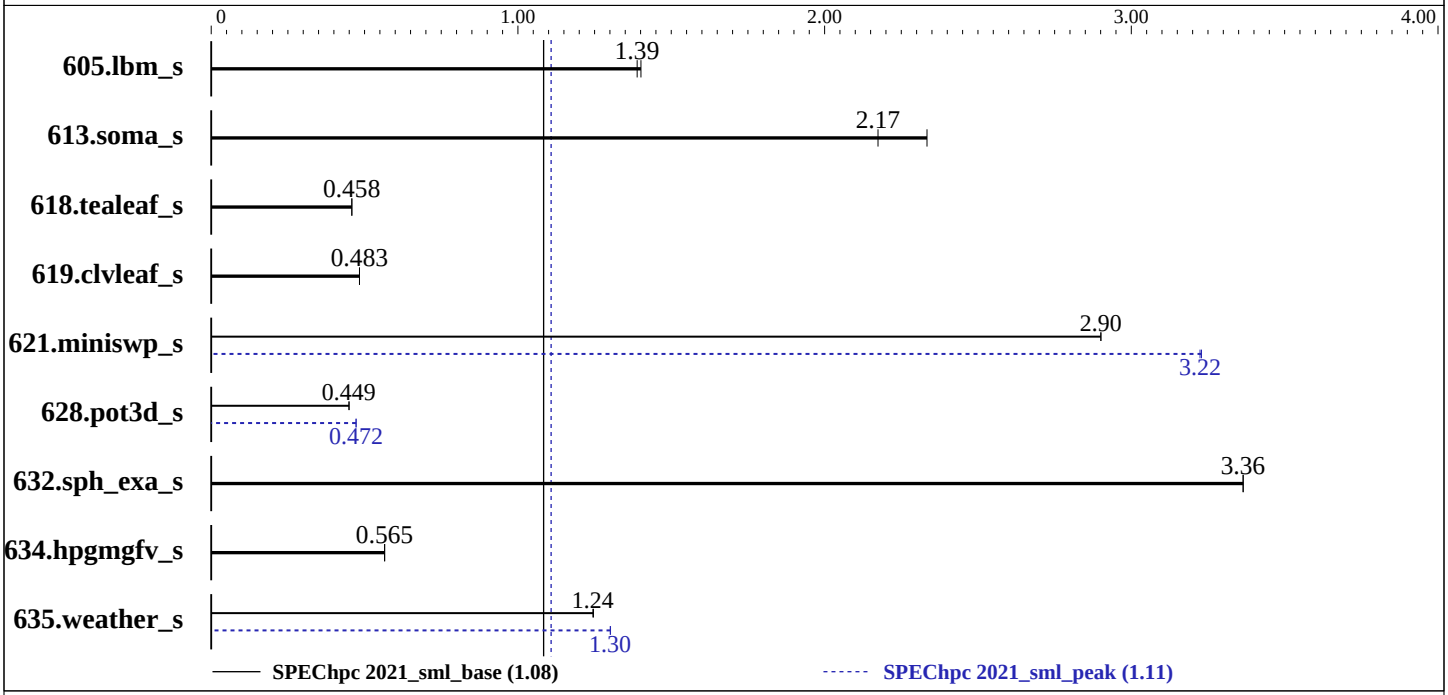

Results Table

Benchmark	Base									Peak								
	Model	Ranks	Thrds/Rnk	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Model	Ranks	Thrds/Rnk	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
605.lbm_s	OMP	20	12	**1116**	**1.39**	1106	1.40			OMP	20	12	**1116**	**1.39**	1106	1.40		
613.soma_s	OMP	20	12	686	2.33	**736**	**2.17**			OMP	20	12	686	2.33	**736**	**2.17**		
618.tealeaf_s	OMP	20	12	4470	0.459	**4472**	**0.458**			OMP	20	12	4470	0.459	**4472**	**0.458**		
619.clvleaf_s	OMP	20	12	**3413**	**0.483**	3413	0.483			OMP	20	12	**3413**	**0.483**	3413	0.483		
621.miniswp_s	OMP	20	12	**379**	**2.90**	379	2.90			OMP	4	60	341	3.23	**341**	**3.22**		
628.pot3d_s	OMP	20	12	3727	0.449	**3729**	**0.449**			OMP	120	2	**3546**	**0.472**	3546	0.472		
632.sph_exa_s	OMP	20	12	**684**	**3.36**	684	3.36			OMP	20	12	**684**	**3.36**	684	3.36		
634.hpgmgfv_s	OMP	20	12	**1724**	**0.565**	1724	0.565			OMP	20	12	**1724**	**0.565**	1724	0.565		
635.weather_s	OMP	20	12	**2089**	**1.24**	2086	1.25			OMP	20	12	1997	1.30	**1998**	**1.30**		

SPEChpc 2021_sml_base = 1.08

SPEChpc 2021_sml_peak = 1.11

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

SPEChpc™ 2021 Small Result

xFusion

xFusion FusionServer 2288H V7 (Intel Xeon Platinum 8490H)

SPEChpc 2021_sml_base = 1.08

SPEChpc 2021_sml_peak = 1.11

hpc2021 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Dec-2023
Hardware Availability: Jan-2023
Software Availability: Apr-2023

Hardware Summary

Type of System:	Homogenous Cluster
Compute Node:	xFusion FusionServer 2288H V7
Interconnect:	Mellanox HDR
Node Node:	xFusion FusionServer 2288H V7
Compute Nodes Used:	1
Total Chips:	2
Total Cores:	120
Total Threads:	240
Total Memory:	1 TB
Max. Peak Threads:	60

Software Summary

Compiler:	Intel oneAPI Compiler 2023.0.0
MPI Library:	Intel MPI Library 2021.8 for Linux OS
Other MPI Info:	None
Other Software:	None
Base Parallel Model:	OMP
Base Ranks Run:	20
Base Threads Run:	12
Peak Parallel Models:	OMP
Minimum Peak Ranks:	4
Maximum Peak Ranks:	120
Max. Peak Threads:	60
Min. Peak Threads:	2

Node Description: xFusion FusionServer 2288H V7

Hardware

Number of nodes:	1
Uses of the node:	Compute Node
Vendor:	xFusion
Model:	xFusion FusionServer 2288H V7
CPU Name:	Intel Xeon Platinum 8490H
CPU(s) orderable:	1, 2 chips
Chips enabled:	2
Cores enabled:	120
Cores per chip:	60
Threads per core:	2
CPU Characteristics:	Turbo Boost Technology up to 3.5 GHz
CPU MHz:	1900
Primary Cache:	32 KB I + 48 KB D on chip per core
Secondary Cache:	2 MB I+D on chip per core
L3 Cache:	112.5 MB I+D on chip per chip
Other Cache:	None
Memory:	1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)
Disk Subsystem:	1 x 7.68 TB NVMe SSD
Other Hardware:	None
Accel Count:	0
Accel Model:	None
Accel Vendor:	None
Accel Type:	None
Accel Connection:	None
Accel ECC enabled:	None
Accel Description:	None
Adapter:	MCX653105A-EFAT
Number of Adapters:	1
Slot Type:	PCI-Express 4.0 x16
Data Rate:	100 Gb/s
Ports Used:	1
Interconnect Type:	Mellanox HDR

Software

Accelerator Driver:	None
Adapter:	MCX653105A-EFAT
Adapter Driver:	5.4-3.1.0
Adapter Firmware:	20.32.1010
Operating System:	Rocky Linux release 8.7 (Green Obsidian) 4.18.0-425.3.1.el8.x86_64
Local File System:	xfs
Shared File System:	NFS
System State:	Multi-user, run level 3
Other Software:	N/A

Interconnect Description: Mellanox HDR

Hardware

Vendor:	Mellanox
Model:	Mellanox HDR
Switch Model:	Mellanox MQM8790-HS2F InfiniBand Switch
Number of Switches:	1
Number of Ports:	40
Data Rate:	200 Gbit/s
Firmware:	27.2010.1202
Topology:	Mesh
Primary Use:	MPI

Software

: --

Submit Notes

```
The config file option 'submit' was used.
```

Compiler Version Notes

```
==============================================================================
 CXXC 632.sph_exa_s(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler 2023.2.0 (2023.2.0.20230622)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /share/opt/2023.2.0/compiler/2023.2.0/linux/bin-llvm
Configuration file:
  /share/opt/2023.2.0/compiler/2023.2.0/linux/bin-llvm/../bin/icpx.cfg
------------------------------------------------------------------------------

==============================================================================
 CC  605.lbm_s(base, peak) 613.soma_s(base, peak) 618.tealeaf_s(base, peak)
     621.miniswp_s(base, peak) 634.hpgmgfv_s(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler 2023.2.0 (2023.2.0.20230622)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /share/opt/2023.2.0/compiler/2023.2.0/linux/bin-llvm
Configuration file:
  /share/opt/2023.2.0/compiler/2023.2.0/linux/bin-llvm/../bin/icx.cfg
------------------------------------------------------------------------------

==============================================================================
 FC  619.clvleaf_s(base, peak) 628.pot3d_s(base, peak) 635.weather_s(base,
     peak)
------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
ifx (IFX) 2023.2.0 20230622
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`mpiicc -cc=icx`

C++ benchmarks:
`mpiicpc -cxx=icpx`

Fortran benchmarks:
`mpiifort -fc=ifx`

Base Portability Flags

605.lbm_s: `-lstdc++ -std=c++14`
613.soma_s: `-lstdc++ -std=c++14`
618.tealeaf_s: `-lstdc++ -std=c++14`
621.miniswp_s: `-lstdc++ -std=c++14`
634.hpgmgfv_s: `-lstdc++ -std=c++14`

Base Optimization Flags

C benchmarks:
`-O3 -Ofast -ipo -fiopenmp -xCORE-AVX512 -mprefer-vector-width=512 -qopt-multiple-gather-scatter-by-shuffles -ffast-math -flto -funroll-loops`

C++ benchmarks:
`-O3 -Ofast -ipo -fiopenmp -xCORE-AVX512 -mprefer-vector-width=512 -qopt-multiple-gather-scatter-by-shuffles -ffast-math -flto -funroll-loops`

Fortran benchmarks:
`-O3 -Ofast -ipo -fiopenmp -xCORE-AVX512 -mprefer-vector-width=512 -qopt-multiple-gather-scatter-by-shuffles -ffast-math -flto -funroll-loops -nostandard-realloc-lhs -align array64byte`

Base Other Flags

C benchmarks:
`-Wno-incompatible-function-pointer-types`

Peak Compiler Invocation

C benchmarks:
`mpiicc -cc=icx`

C++ benchmarks:
`mpiicpc -cxx=icpx`

Fortran benchmarks:
`mpiifort -fc=ifx`

Peak Portability Flags

605.lbm_s: `-lstdc++ -std=c++14`
613.soma_s: `-lstdc++ -std=c++14`
618.tealeaf_s: `-lstdc++ -std=c++14`
621.miniswp_s: `-lstdc++ -std=c++14`
634.hpgmgfv_s: `-lstdc++ -std=c++14`

Peak Optimization Flags

C benchmarks:

605.lbm_s: `basepeak = yes`

613.soma_s: `basepeak = yes`

618.tealeaf_s: `basepeak = yes`

621.miniswp_s: `-O3 -Ofast -xCORE-AVX512 -ansi-alias -qopenmp -ipo -qopt-zmm-usage=high -qopt-multiple-gather-scatter-by-shuffles`

634.hpgmgfv_s: `basepeak = yes`

C++ benchmarks:

(Continued on next page)

Peak Optimization Flags (Continued)

632.sph_exa_s: `basepeak = yes`

Fortran benchmarks:

619.clvleaf_s: `basepeak = yes`

628.pot3d_s: `-O3 -Ofast -ipo -fiopenmp -xCORE-AVX512 -mprefer-vector-width=512 -qopt-multiple-gather-scatter-by-shuffles -ffast-math -flto -funroll-loops -qopt-streaming-stores=always -nostandard-realloc-lhs -align array64byte`

635.weather_s: `Same as 628.pot3d_s`

Peak Other Flags

C benchmarks:
`-Wno-incompatible-function-pointer-types`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/hpc2021/flags/Intel_compiler_flags.2023-08-16.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/hpc2021/flags/Intel_compiler_flags.2023-08-16.xml`

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEChpc2021 v1.1.8 on 2023-12-22 23:04:16-0500.
Report generated on 2024-01-10 17:35:07 by hpc2021 PDF formatter v1.0.3.
Originally published on 2024-01-10.