



SPEChpc™ 2021 Tiny Result

Copyright 2021-2025 Standard Performance Evaluation Corporation

Intel


Intel Server D50DNP1SBB (Intel Xeon Platinum 8592+)

SPEChpc 2021_tny_base = 209

SPEChpc 2021_tny_peak = 211

hpc2021 License: 13
Test Sponsor: Intel
Tested by: Intel

Test Date: Jun-2024
Hardware Availability: Dec-2023
Software Availability: Mar-2024

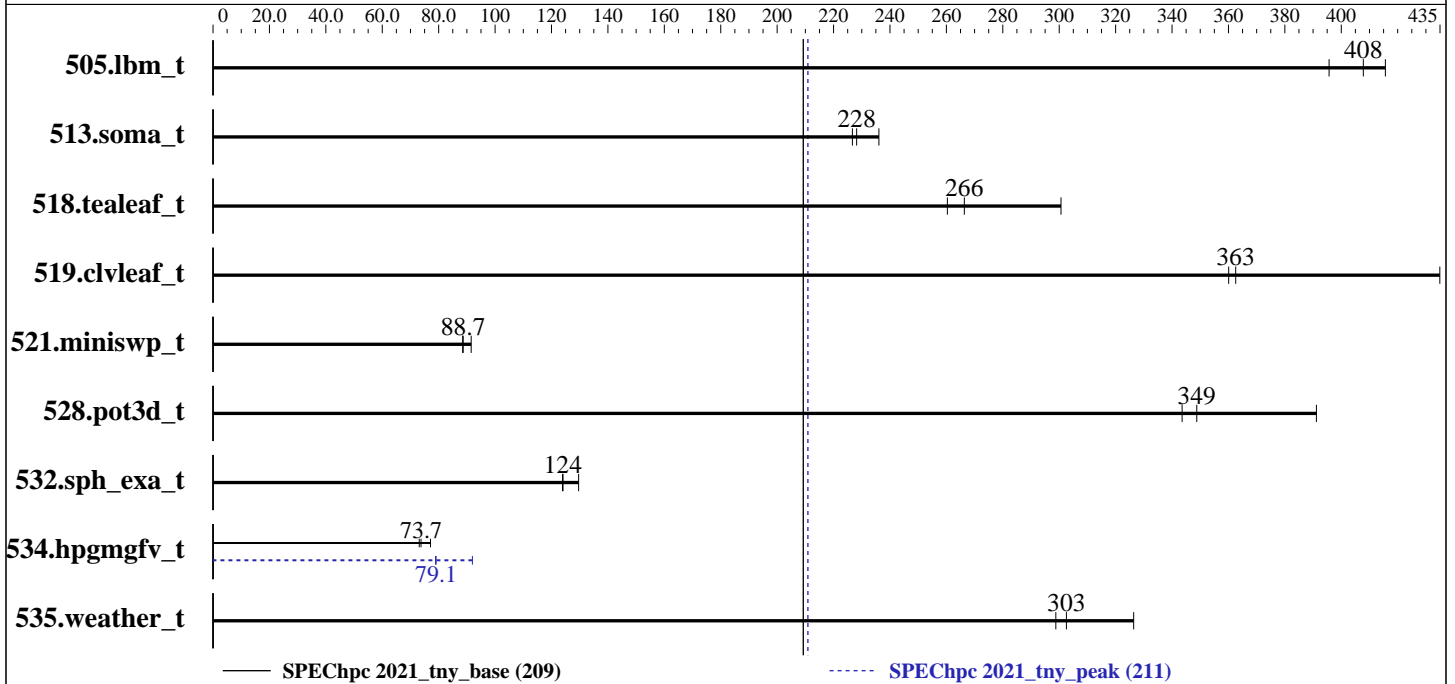

Results Table

Benchmark	Base										Peak							
	Model	Ranks	Thrds/Rnk	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Model	Ranks	Thrds/Rnk	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
505.lbm_t	OMP	256	32	5.69	396	5.52	408	5.41	416	OMP	256	32	5.69	396	5.52	408	5.41	416
513.soma_t	OMP	256	32	15.7	236	16.3	227	16.2	228	OMP	256	32	15.7	236	16.3	227	16.2	228
518.tealeaf_t	OMP	256	32	5.49	301	6.19	266	6.34	260	OMP	256	32	5.49	301	6.19	266	6.34	260
519.civleaf_t	OMP	256	32	3.79	435	4.55	363	4.58	360	OMP	256	32	3.79	435	4.55	363	4.58	360
521.miniswp_t	OMP	256	32	17.5	91.5	18.1	88.5	18.0	88.7	OMP	256	32	17.5	91.5	18.1	88.5	18.0	88.7
528.pot3d_t	OMP	256	32	5.43	391	6.09	349	6.18	344	OMP	256	32	5.43	391	6.09	349	6.18	344
532.sph_exa_t	OMP	256	32	15.0	130	15.7	124	15.7	124	OMP	256	32	15.0	130	15.7	124	15.7	124
534.hpgmgfv_t	OMP	256	32	15.2	77.1	15.9	73.7	16.1	73.1	OMP	1024	8	12.8	92.0	14.9	79.1	14.9	78.9
535.weather_t	OMP	256	32	9.88	326	10.8	299	10.7	303	OMP	256	32	9.88	326	10.8	299	10.7	303

SPEChpc 2021_tny_base = 209

SPEChpc 2021_tny_peak = 211

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.



SPEChpc™ 2021 Tiny Result

Copyright 2021-2025 Standard Performance Evaluation Corporation

Intel

Intel Server D50DNP1SBB (Intel Xeon Platinum 8592+)

SPEChpc 2021_tny_base = 209

SPEChpc 2021_tny_peak = 211

hpc2021 License: 13
Test Sponsor: Intel
Tested by: Intel

Test Date: Jun-2024
Hardware Availability: Dec-2023
Software Availability: Mar-2024

Hardware Summary

Type of System: Homogenous Cluster
Compute Node: Intel Server D50DNP1SBB (Xeon 8592+)
Interconnect: Mellanox HDR
Compute Nodes Used: 64
Total Chips: 128
Total Cores: 8192
Total Threads: 16384
Total Memory: 32 TB
Max. Peak Threads: 32

Software Summary

Compiler: Intel oneAPI Compiler 2024.1.0
MPI Library: Intel MPI Library 2021.12 for Linux OS
Other MPI Info: None
Other Software: None
Base Parallel Model: OMP
Base Ranks Run: 256
Base Threads Run: 32
Peak Parallel Models: OMP
Minimum Peak Ranks: 256
Maximum Peak Ranks: 1024
Max. Peak Threads: 32
Min. Peak Threads: 8

Node Description: Intel Server D50DNP1SBB (Xeon 8592+)

Hardware

Number of nodes: 64
Uses of the node: Compute
Vendor: Intel
Model: Intel Server D50DNP1SBB (Xeon 8592+)
CPU Name: Intel Xeon Platinum 8592+
CPU(s) orderable: 1, 2 chips
Chips enabled: 2
Cores enabled: 128
Cores per chip: 64
Threads per core: 2
CPU Characteristics: Turbo Boost Technology up to 3.9 GHz
CPU MHz: 1900
Primary Cache: 32 KB I + 48 KB D on chip per core
Secondary Cache: 2 MB I+D on chip per core
L3 Cache: 320 MB I+D on chip per chip
Other Cache: None
Memory: 512 GB (16 x 32 GB 2Rx8 PC5-4800B-R)
Disk Subsystem: 1 x 1 TB NVMe U.2 2.5" SSD
Other Hardware: None
Accel Count: None
Accel Model: None
Accel Vendor: None
Accel Type: None
Accel Connection: None
Accel ECC enabled: None
Accel Description: None
Adapter: Mellanox ConnectX-6 HDR
Number of Adapters: 1
Slot Type: PCI-Express 4.0 x16
Data Rate: 200Gbit/s
Ports Used: 1
Interconnect Type: Mellanox HDR

Software

Accelerator Driver: None
Adapter: Mellanox ConnectX-6 HDR
Adapter Driver: 23.04-0.5.3
Adapter Firmware: 20.37.1014
Operating System: Rocky Linux 8.8 (Green Obsidian)
4.18.0-477.15.1.el8_8.x86_64
Local File System: xfs
Shared File System: PANASAS FS
System State: Run level 5
Other Software: None



SPEChpc™ 2021 Tiny Result

Copyright 2021-2025 Standard Performance Evaluation Corporation

Intel

Intel Server D50DNP1SBB (Intel Xeon Platinum 8592+)

SPEChpc 2021_tny_base = 209

SPEChpc 2021_tny_peak = 211

hpc2021 License: 13
Test Sponsor: Intel
Tested by: Intel

Test Date: Jun-2024
Hardware Availability: Dec-2023
Software Availability: Mar-2024

Interconnect Description: Mellanox HDR

Hardware

Software

Vendor: Mellanox
Model: Mellanox HDR
Switch Model: Mellanox MQM8790-HS2F Quantum HDR InfiniBand Switch
Number of Switches: 18
Number of Ports: 40
Data Rate: 200 Gbit/s
Firmware: 20.36.1010
Topology: Fat-tree
Primary Use: MPI Traffic

: --

Submit Notes

The config file option 'submit' was used.

General Notes

The PANASAS filesystem as described on this result page was formerly generally available. At the time of this publication, it may not be shipping, and/or may not be supported, and/or may fail to meet other tests of General Availability described in the SPEC HPG Policy document, <http://www.spec.org/hpg/policy.html>

Compiler Version Notes

=====
CXXC 532.sph_exa_t(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler 2024.0.2 (2024.0.2.20231213)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir:
/global/panfs05/admin5/opt/intel/oneAPI/2024.0.1/compiler/2024.0/bin/compiler
Configuration file:
/global/panfs05/admin5/opt/intel/oneAPI/2024.0.1/compiler/2024.0/bin/compiler/./icpx.cfg

=====
CC 505.lbm_t(base, peak) 513.soma_t(base, peak) 518.tealeaf_t(base, peak)
521.miniswp_t(base, peak) 534.hpgmgfv_t(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler 2024.0.2 (2024.0.2.20231213)
Target: x86_64-unknown-linux-gnu

(Continued on next page)



SPEChpc™ 2021 Tiny Result

Copyright 2021-2025 Standard Performance Evaluation Corporation

Intel

Intel Server D50DNP1SBB (Intel Xeon Platinum 8592+)

SPEChpc 2021_tny_base = 209

SPEChpc 2021_tny_peak = 211

hpc2021 License: 13
Test Sponsor: Intel
Tested by: Intel

Test Date: Jun-2024
Hardware Availability: Dec-2023
Software Availability: Mar-2024

Compiler Version Notes (Continued)

```

Thread model: posix
InstalledDir:
  /global/panfs05/admin5/opt/intel/oneAPI/2024.0.1/compiler/2024.0/bin/compiler
Configuration file:
  /global/panfs05/admin5/opt/intel/oneAPI/2024.0.1/compiler/2024.0/bin/compiler/./icx.cfg
-----

=====
FC 519.clvleaf_t(base, peak) 528.pot3d_t(base, peak) 535.weather_t(base,
  peak)
-----

ifx (IFX) 2024.0.2 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
-----

```

Base Compiler Invocation

```

C benchmarks:
mpiicc -cc=icx

C++ benchmarks:
mpiicpc -cxx=icpx

Fortran benchmarks:
mpiifort -fc=ifx

```

Base Portability Flags

```

505.lbm_t: -lstdc++ -std=c++14
513.soma_t: -lstdc++ -std=c++14
518.tealeaf_t: -lstdc++ -std=c++14
521.miniswp_t: -lstdc++ -std=c++14
534.hpgmgfv_t: -lstdc++ -std=c++14

```

Base Optimization Flags

```

C benchmarks:
-O3 -Ofast -xCORE-AVX512 -mprefer-vector-width=512
-qopt-multiple-gather-scatter-by-shuffles -fiopenmp -ffast-math -flto
-funroll-loops

```

(Continued on next page)



SPEChpc™ 2021 Tiny Result

Copyright 2021-2025 Standard Performance Evaluation Corporation

Intel

Intel Server D50DNP1SBB (Intel Xeon Platinum 8592+)

SPEChpc 2021_tny_base = 209

SPEChpc 2021_tny_peak = 211

hpc2021 License: 13
Test Sponsor: Intel
Tested by: Intel

Test Date: Jun-2024
Hardware Availability: Dec-2023
Software Availability: Mar-2024

Base Optimization Flags (Continued)

C++ benchmarks:

```
-O3 -Ofast -xCORE-AVX512 -mprefer-vector-width=512  
-qopt-multiple-gather-scatter-by-shuffles -fiopenmp -ffast-math -flto  
-funroll-loops
```

Fortran benchmarks:

```
-O3 -Ofast -xCORE-AVX512 -mprefer-vector-width=512  
-qopt-multiple-gather-scatter-by-shuffles -fiopenmp -ffast-math -flto  
-funroll-loops -nostandard-realloc-lhs -align array64byte
```

Base Other Flags

C benchmarks:

```
-Wno-incompatible-function-pointer-types
```

Peak Compiler Invocation

C benchmarks:

```
mpiicc -cc=icx
```

C++ benchmarks:

```
mpiicpc -cxx=icpx
```

Fortran benchmarks:

```
mpiifort -fc=ifx
```

Peak Portability Flags

```
505.lbm_t: -lstdc++ -std=c++14  
513.soma_t: -lstdc++ -std=c++14  
518.tealeaf_t: -lstdc++ -std=c++14  
521.miniswp_t: -lstdc++ -std=c++14  
534.hpgmgfv_t: -lstdc++ -std=c++14
```



SPEChpc™ 2021 Tiny Result

Copyright 2021-2025 Standard Performance Evaluation Corporation

Intel

Intel Server D50DNP1SBB (Intel Xeon Platinum 8592+)

SPEChpc 2021_tny_base = 209

SPEChpc 2021_tny_peak = 211

hpc2021 License: 13
Test Sponsor: Intel
Tested by: Intel

Test Date: Jun-2024
Hardware Availability: Dec-2023
Software Availability: Mar-2024

Peak Optimization Flags

C benchmarks:

505.lbm_t: basepeak = yes

513.soma_t: basepeak = yes

518.tealeaf_t: basepeak = yes

521.miniswp_t: basepeak = yes

534.hpgmgfv_t: -O3 -Ofast -xCORE-AVX512 -mprefer-vector-width=512
-qopt-multiple-gather-scatter-by-shuffles -fiopenmp
-ffast-math -flto -funroll-loops

C++ benchmarks:

532.sph_exa_t: basepeak = yes

Fortran benchmarks:

519.cvlleaf_t: basepeak = yes

528.pot3d_t: basepeak = yes

535.weather_t: basepeak = yes

Peak Other Flags

C benchmarks:

-Wno-incompatible-function-pointer-types

The flags file that was used to format this result can be browsed at

http://www.spec.org/hpc2021/flags/Intel_compiler_flags.2024-12-11.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/hpc2021/flags/Intel_compiler_flags.2024-12-11.xml



SPEChpc™ 2021 Tiny Result

Copyright 2021-2025 Standard Performance Evaluation Corporation

Intel

Intel Server D50DNP1SBB (Intel Xeon Platinum 8592+)

SPEChpc 2021_tny_base = 209

SPEChpc 2021_tny_peak = 211

hpc2021 License: 13
Test Sponsor: Intel
Tested by: Intel

Test Date: Jun-2024
Hardware Availability: Dec-2023
Software Availability: Mar-2024

SPEChpc is a trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEChpc2021 v1.1.8 on 2024-06-11 07:02:47-0400.
Report generated on 2025-01-22 12:57:17 by hpc2021 PDF formatter v1.0.3.
Originally published on 2024-12-25.