



CFP2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation


IBM Corporation

IBM eServer pSeries 655 Model 651 (1100 MHz, 8 CPU)

SPECfp_rate2000 = 68.1

SPECfp_rate_base2000 = 65.7

SPEC license #: 11 | Tested by: IBM, Austin, TX | Test date: Oct-2002 | Hardware Avail: Dec-2002 | Software Avail: Dec-2002

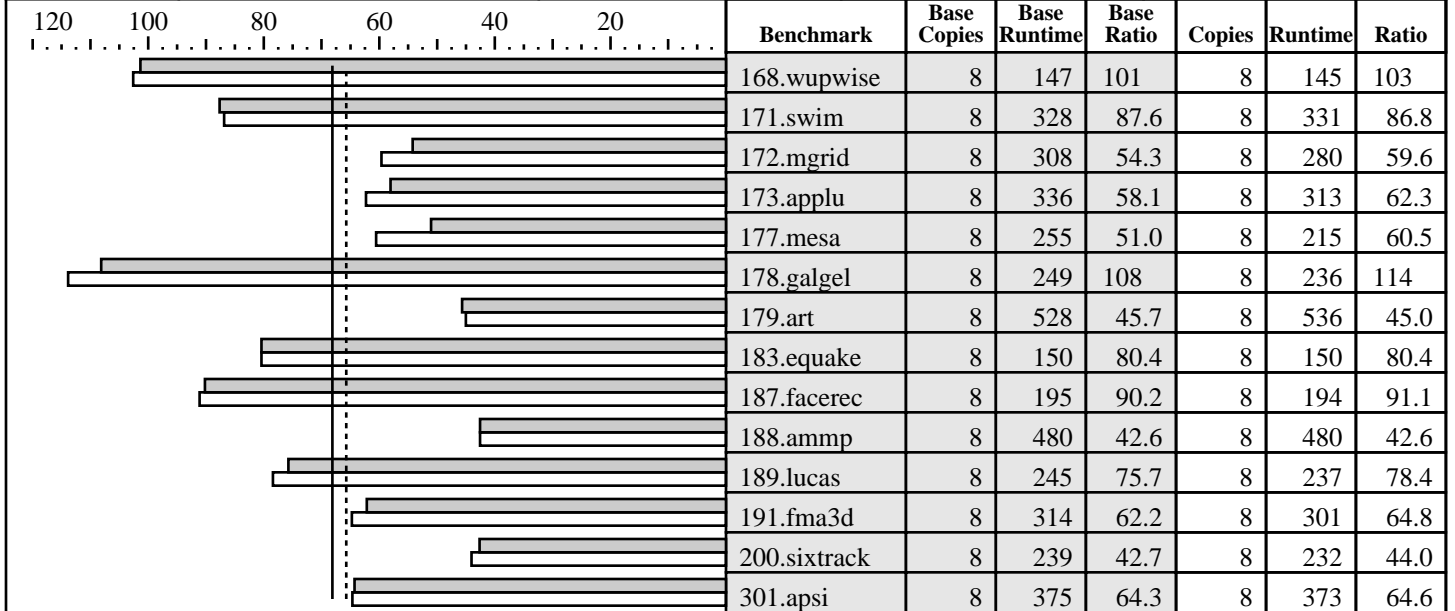

Hardware

CPU: POWER4
 CPU MHz: 1100
 FPU: Integrated
 CPU(s) enabled: 8 cores, 4 chips, 2 cores/chip, 4 chips/MCM
 CPU(s) orderable: 1 (order by # MCM)
 Parallel: No
 Primary Cache: 64KBI+32KBD (on chip) per core
 Secondary Cache: 1440KB unified (on chip) per chip
 L3 Cache: 128MB unified (off-chip) per MCM, 1 MCM in SUT (4 chips per MCM)
 Other Cache: None
 Memory: 16 GB
 Disk Subsystem: 1x18.2 GB SCSI
 Other Hardware: None

Software

Operating System: AIX 5L V5.1
 Compiler: IBM C for AIX, Version 6.0
 IBM XL FORTRAN for AIX, Version 8.1.0.1
 Other Software: ESSL 3.3, MASS 3.0
 File System: AIX/JFS
 System State: Multi-User

Notes/Tuning Information

Portability Flags

-qfixed used in: wupwise, swim, mgrid, applu, galgel, sixtrack, apsi
 -qsuffix=f=f90 used in: galgel, facerec, lucas, fma3d

Base Optimization Flags:

C:
 -O5 -qalign=natural -blpdata -lmass
 Fortran:
 -O5 -qalign=natural -blpdata -lmass

Floating Point Peak Flags

168.wupwise
 -O5 -qipa=partition=large
 171.swim
 -O4 -q64 -blpdata
 172.mgrid



CFP2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

IBM Corporation

IBM eServer pSeries 655 Model 651 (1100 MHz, 8 CPU)

SPECfp_rate2000 = 68.1

SPECfp_rate_base2000 = 65.7

SPEC license #: 11 | Tested by: IBM, Austin, TX | Test date: Oct-2002 | Hardware Avail: Dec-2002 | Software Avail: Dec-2002

Notes/Tuning Information (Continued)

```

-05 -qarch=pwr3 -qtune=pwr3 -blpdata
173.applu
-03 -qarch=pwr3 -qtune=pwr3 -lmass -qhot -blpdata
177.mesa
-qpdf1/pdf2
fdpr -v -R3
-03 -qarch=pwr3 -qtune=pwr3 -qipa=level=2 -qalign=natural -blpdata
178.galgel
-qpdf1/pdf2
fdpr -v -R3
-05 -qalign=natural -qessl -lessl -lmass -blpdata
179.art
-04 -lhmu
183.quake
BASEPEAK = 1
187.facerec
fdpr -v -R3
-05 -lmass -blpdata
188.ammp
BASEPEAK = 1
189.lucas
-03 -q64 -blpdata
191.fma3d
-qpdf1/pdf2
-05 -qarch=pwr4 -qtune=pwr3 -lhmu -qalign=natural -blpdata
200.sixtrack
-qpdf1/pdf2
-05 -lmass
301.apsi
-05 -qarch=pwr4 -qtune=pwr3 -blpdata

```

MCM: Acronym for "Multi-Chip Module"

SUT: Acronym for "System Under Test"

```

fpdr: Feedback directed program restructuring tool
/usr/spec2000 filesystem mounted with no JFS log file I/O.
APAR IY 35692 was applied to AIX to enable new hardware support.
ulimits set to unlimited.
C: IBM VAC++ invoked as xlc
Fortran 77 and 90: IBM XL Fortran for AIX invoked as xlf90.
Large page mode and memory affinity were set as follows:
vmtune64 -g 16777216 -L 256 -y1
chuser capabilities=CAP_BYPASS_RAC_VMM,CAP_PROPAGATE $USER
bosboot -a
shutdown -r

```