CFP2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire 12K

SPECfp_rate2000 = 338

SPECfp_rate_base2000 = 281

SPEC license #: 6 | Tested by: Sun Microsystems | Test date: Mar-2003 | Hardware Avail: Mar-2003 | Software Avail: May-2003

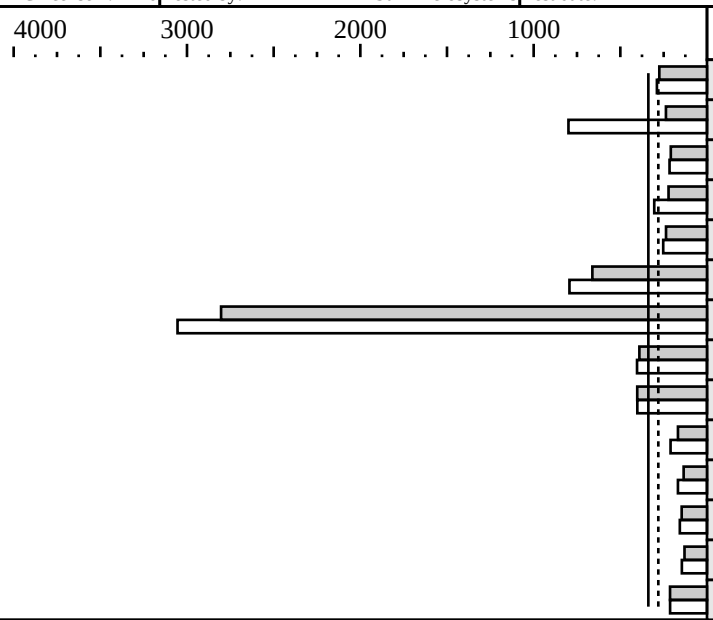

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	32	216	275	32	206	289
171.swim	32	486	237	32	144	799
172.mgrid	32	320	209	32	309	216
173.applu	32	351	222	32	256	304
177.mesa	32	220	236	32	206	253
178.galgel	32	163	661	32	136	794
179.art	32	34.4	2803	32	31.6	3055
183.equake	32	124	390	32	120	404
187.facerec	32	175	402	32	175	402
188.ammp	32	487	168	32	388	210
189.lucas	32	551	135	32	443	168
191.fma3d	32	534	146	32	497	157
200.sixtrack	32	315	130	32	282	145
301.apsi	32	453	213	32	453	213

Hardware

CPU:	UltraSPARC III Cu
CPU MHz:	1200
FPU:	Integrated
CPU(s) enabled:	32 cores, 32 chips, 1 core/chip
CPU(s) orderable:	4-52
Parallel:	No
Primary Cache:	32KBI+64KBD on chip
Secondary Cache:	8MB(I+D) off chip
L3 Cache:	None
Other Cache:	None
Memory:	256GB 16-way interleaved
Disk Subsystem:	1 x 36GB (System Disk) Sun StorEdge T3, 9 x 18GB striped
Other Hardware:	None

Software

Operating System:	Solaris 9 12/02
Compiler:	Sun ONE Studio 8 (pre-FCS build 3/9) Sun Performance Library 8 (pre-FCS build 3/9)
File System:	ufs with ufs logging
System State:	Multi-User

Notes/Tuning Information

```
Compiler invocation:
  C: cc
  CXX: CC
  F90: f90
  F77: f90

Floating point base flags:
    C:  -fast -xipo=2 -xalias_level=std with ONESTEP=yes and feedback
  F90:  -fast -xipo=2 with ONESTEP=yes and feedback

Floating point peak flags:
 ONESTEP=yes and feedback for all benchmarks, unless otherwise noted

 168.wupwise: -fast -xipo=2 -Qoption iropt -Ainline:inc=800:cp=1
 171.swim:    -fast -xpad=common:3969 -xpagesize=64K -xprefetch=latx:1.6
              -Qoption iropt -Atile:skewp,-Ainline:cs=700
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
                (no feedback)
 172.mgrid:     -fast -xipo=2
 173.applu:     -fast -xipo=2
                -Qoption cg -Qlp=1-av=192-fa=1,-Qms_pipe+prefolim=7
                -Qoption iropt -Aujam:inner=g
 177.mesa:      -fast -xipo=2 -xalias_level=strong -xrestrict
                -Wc,-Qms_pipe+unoovf
 178.galgel:    -fast -xipo=2 -Qoption iropt -Addint:sf=9 -xlic_lib=sunperf
                RM_SOURCES=lapak.f90
 179.art:       -fast -xipo=2 -xalias_level=std
                -Wc,-Qms_pipe-prefst,-Qms_pipe+prefolim=11
 183.equake:    -fast -xipo=2 -xalias_level=strong -xprefetch_level=2
 187.facerec:   -fast -xipo=2
 188.ammp:      -fast -xipo=2 -xalias_level=std -xpagesize=512K -lmopt -lm
 189.lucas:     -fast -xipo=2 -xprefetch_level=3 -Qoption iropt -Apf:pdl=1
                -Qoption f90comp -array_pad_rows,1977
 191.fma3d:     -fast -xipo=2 -stackvar -xprefetch_level=3
                -Qoption iropt -Apf:pdl=1
 200.sixtrack:-O -dalign -xchip=ultra3 -xarch=v8plusb -fsimple=2
 301.apsi:      -fast -xipo=2

Feedback is done as follows, unless otherwise noted:
 fdo_pre0:  rm -rf ./feedback.profile ./SunWS_cache
 PASS1:     -xprofile=collect:./feedback
 PASS2:     -xprofile=use:./feedback

Portability:
 178.galgel:  -e -fixed

Shell Environments:
  Stack size set to unlimited via "ulimit -s unlimited"
  MPSSHEAP=4M
  MPSSSTACK=4M
  LD_PRELOAD=mpss.so.1

Kernel Parameters (/etc/system):
  autoup=900
  tune_t_fsflushr=1

Processes were bound to CPUs using submit=pbind
```