




# CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Hewlett-Packard Company  
ProLiant DL145 G2 (AMD Opteron (TM) 254)

SPECint\_rate2000 = 22.1  
SPECint\_rate\_base2000 = 19.7

SPEC license #: 3 Tested by: Hewlett-Packard Company Test date: Nov-2005 Hardware Avail: Oct-2005 Software Avail: Sep-2005

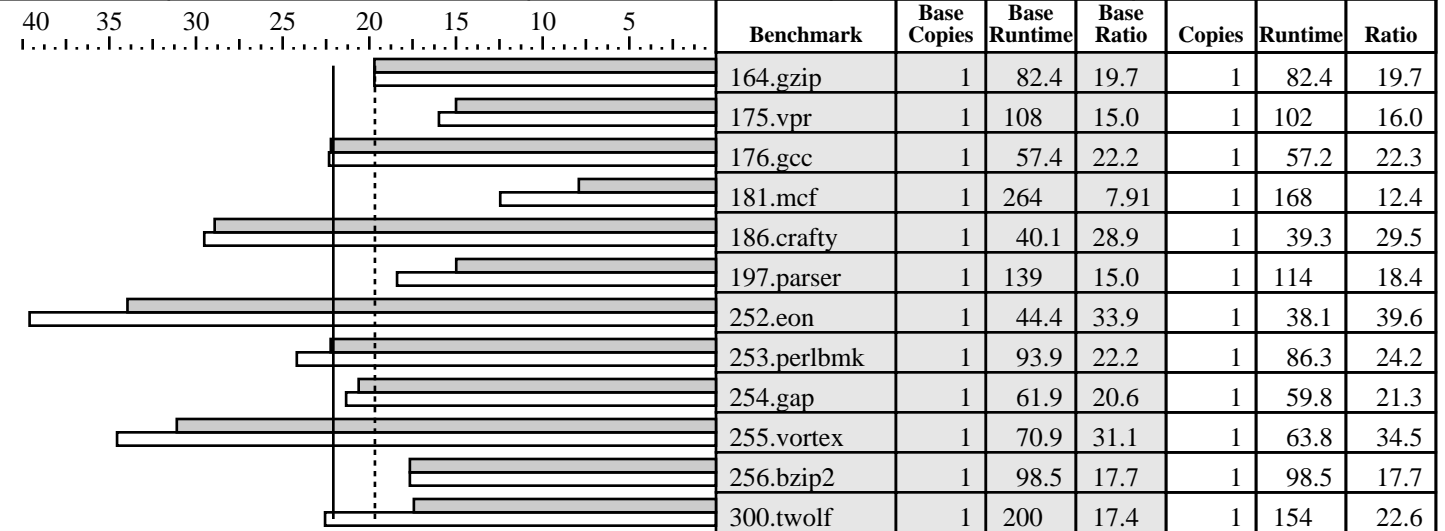

### Hardware

CPU: AMD Opteron (TM) 254  
 CPU MHz: 2800  
 FPU: Integrated  
 CPU(s) enabled: 1 core, 1 chip, 1 core/chip  
 CPU(s) orderable: 1,2  
 Parallel: No  
 Primary Cache: 64KBI + 64KBD on chip  
 Secondary Cache: 1024KB(I+D) on chip  
 L3 Cache: N/A  
 Other Cache: N/A  
 Memory: 4x2048MB PC3200 CL3.0  
 Disk Subsystem: 1x36.4GB 15K Ultra320 SCSI  
 Other Hardware:

### Software

Operating System: SuSE Linux Enterprise Server 9 (x86\_64) SP 2  
 SuSE kernel 2.6.5-7.191-smp  
 Compiler: PathScale EKOPath(TM) Compiler Suite, Release 2.2.1  
 File System: Linux/ext2  
 System State: Multi-user run level 3

## Notes/Tuning Information

```
+FDO: PASS1= -fb_create fbdata PASS2= -fb_opt fbdata
Base tuning for C programs: -Ofast +FDO
Base tuning for C++ programs: -Ofast +FDO
Portability flags:
 186.crafty: -DLINUX_i386
 252.eon: -DHAS_ERRLIST -DSPEC_CPU2000_LP64
 253.perlbnk: -DSPEC_CPU2000_LINUX_I386 -DSPEC_CPU2000_NEED_BOOL
             -DSPEC_CPU2000_GLIBC22 -DSPEC_CPU2000_LP64
 254.gap: -DSYS_IS_USG -DSYS_HAS_IOCTL_PROTO -DSYS_HAS_TIME_PROTO
          -DSYS_HAS_CALLOC_PROTO -DSPEC_CPU2000_LP64
 255.vortex: -DSPEC_CPU2000_LP64
Peak tuning:
 164.gzip: -O3 -ipa -WOPT:val=0 -OPT:unroll_size=0 +FDO
 175.vpr: -O3 -ipa -m32 +FDO
 176.gcc: -O3 -IPA:plimit=10000 -LNO:opt=0 -OPT:goto=off +FDO
 181.mcf: -O3 -ipa -IPA:field_reorder=on -m32 +FDO
 186.crafty: -Ofast -CG:local_fwd_sched=on -LNO:opt=0 -WOPT:val=0 +FDO
 197.parser: -O3 -ipa -m32 -IPA:ctype=on +FDO
 252.eon: -Ofast -CG:gcm=off:p2align_freq=1:prefetch=off -IPA:plimit=4000
          -OPT:treeheight=on -TENV:X=4:frame_pointer=off -fno-exceptions
```



# CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Hewlett-Packard Company  
ProLiant DL145 G2 (AMD Opteron (TM) 254)

SPECint\_rate2000 = 22.1  
SPECint\_rate\_base2000 = 19.7

SPEC license #: 3 | Tested by: Hewlett-Packard Company | Test date: Nov-2005 | Hardware Avail: Oct-2005 | Software Avail: Sep-2005

## Notes/Tuning Information (Continued)

```
-LNO:fu=10:full_unroll_outer=on -GRA:optimize_boundary=on +FDO
253.perlbnk: -O2 -ipa -OPT:Ofast:transform_to_memlib=off
              -fno-math-errno -IPA:plimit=10000 +FDO
254.gap:      -Ofast -IPA:min_hotness=5 -OPT:alias=disjoint -CG:movnti=1 +FDO
255.vortex:   -Ofast -OPT:goto=off +FDO
256.bzip2:    basepeak=true
300.twolf:    -O2 -CG:gcm=off:p2align_freq=100000
              -OPT:Ofast:unroll_times_max=8:unroll_size=256:alias=disjoint
              -WOPT:mem_opnds=on -m32 +FDO
```

BIOS Configuration Notes  
Node Interleaving Disabled

Submitted\_by: "Schmidt, David (Performance Eng.)" <D.Schmidt@hp.com>  
Submitted: Tue Nov 22 15:43:19 2005  
Submission: cpu2000-20051114-05060.sub