




CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire X4200

SPECint_rate2000 = 75.6
SPECint_rate_base2000 = 69.2

SPEC license #: 6 | Tested by: Sun Microsystems, Santa Clara | Test date: Nov-2005 | Hardware Avail: Dec-2005 | Software Avail: Nov-2005

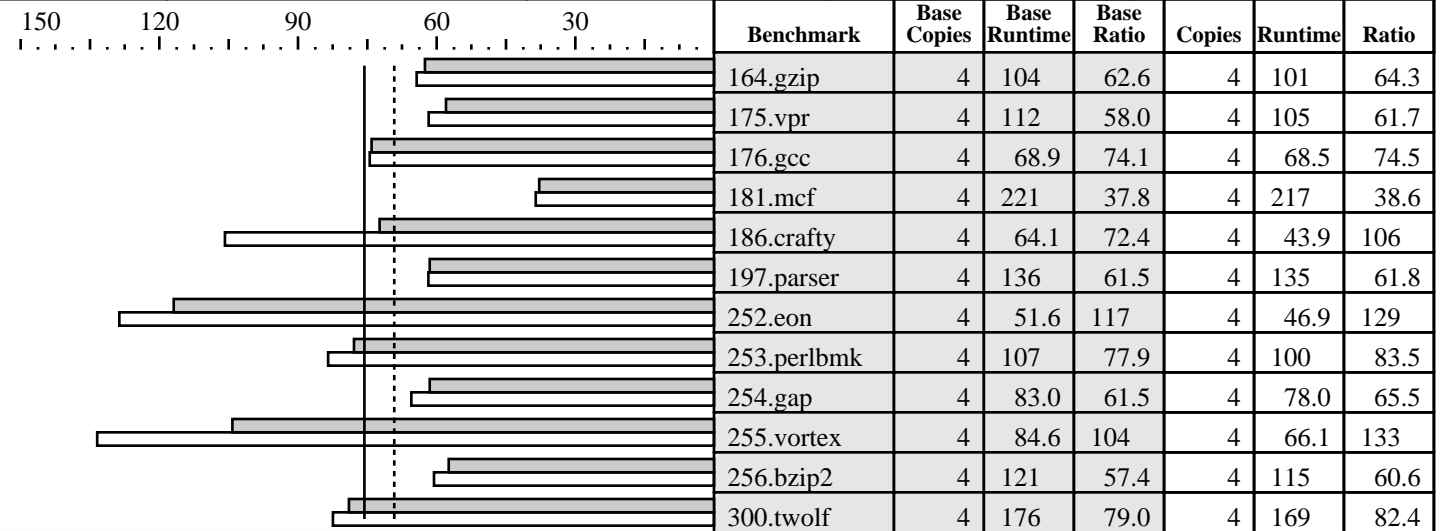

Hardware

CPU: AMD Opteron (TM) 285 SE
 CPU MHz: 2600
 FPU: Integrated
 CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip
 CPU(s) orderable: 1,2 (order by # of chips)
 Parallel: No
 Primary Cache: 64KBI + 64KBD (on chip) per core
 Secondary Cache: 1024KB (I+D) (on chip) per core
 L3 Cache: N/A
 Other Cache: N/A
 Memory: 16GB (8x2GB, PC3200 CL3 DDR ECC Registered SDRAM)
 Disk Subsystem: SAS, 36GB, 10K RPM
 Other Hardware: None

Software

Operating System: Solaris 10 3/05 HW1
 Compiler: Sun Studio 11
 File System: ufs
 System State: Multi-user

Notes/Tuning Information

Compiler invocation:

C: cc
CXX: CC

FDO: PASS1= -xprofile=collect:./feedback PASS2= -xprofile=use:./feedback
fdo_pre0: rm -rf ./feedback.profile

Integer base flags:

Base tuning for C programs : -fast -xcrossfile -xalias_level=std +FDO ONESTEP=yes
Base tuning for C++ programs: -fast -xcrossfile -xarch=amd64 +FDO ONESTEP=yes

Integer peak flags:

ONESTEP=yes +FDO for all benchmarks

164.gzip: -fast -xpagesize=2m -xcrossfile -M /usr/lib/ld/map.bssalign
 175.vpr: -fast -xpagesize=2m -W2,-Ainline:inc=200:cs=500 -M /usr/lib/ld/map.bssalign -lmopt -lm
 176.gcc: -fast -xipo=2 -Wd,-iropt-prof -xalias_level=strong -xrestrict
 181.mcf: -fast -xpagesize=2m -xcrossfile -M /usr/lib/ld/map.bssalign
 186.crafty: -fast -xrestrict -xipo=2 -xprefetch -xarch=amd64 -xpagesize=2m



CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire X4200

SPECint_rate2000 = 75.6
SPECint_rate_base2000 = 69.2

SPEC license #: 6 | Tested by: Sun Microsystems, Santa Clara | Test date: Nov-2005 | Hardware Avail: Dec-2005 | Software Avail: Nov-2005

Notes/Tuning Information (Continued)

```

-M /usr/lib/ld/map.bssalign -Wd,-iropt-prof -W2,-Ashort_ldst:ldld
-W2,-Ainline:rs=50
197.parser: -fast -xpagesize=2m -xipo=2 -W2,-Ainline:inc=200:cs=500 -M /usr/lib/ld/map.bssalign
252.eon: -fast -xipo=2 -qoption CC -iropt-prof -xvector -qoption iropt -Abcopy -xalias_level
-xarch=amd64 -xrestrict -Qoption ube -xcallee=yes -xregs=frameptr
253.perlbnk: -fast -xcrossfile -M /usr/lib/ld/map.bssalign -lbsdmalloc
254.gap: -fast -xipo=2 -Wd,-iropt-prof -xvector -W2,-Abcopy -lbsdmalloc -xprefetch
-W2,-Ainline:cp=5:rs=1300:irs=3300:inc=100 -W2,-Arestrict_g
255.vortex: -fast -xipo=2 -Wd,-iropt-prof -lbsdmalloc -xrestrict -xprefetch -M /usr/lib/ld/map.bssalign
256.bzip2: -fast -xpagesize=2m -xcrossfile -xarch=sse2 -Xc -M /usr/lib/ld/map.bssalign -lbsdmalloc
300.twolf: -fast -xipo=2 -Wd,-iropt-prof -xrestrict -M /usr/lib/ld/map.bssalign

```

Portability:

```

186.crafty: -DUNIX -DHAS_LONGLONG -DLITTLE_ENDIAN_ARCH
252.eon: -DFMAX_IS_DOUBLE -DSPEC_CPU2000_LP64 -DUSE_STRERROR
253.perlbnk: -DSPEC_CPU2000_SOLARIS_X86
254.gap: -DSYS_IS_USG -DSYS_HAS_SIGNAL_PROTO -DSYS_HAS_TIME_PROTO -DSYS_HAS_CALLOC_PROTO

```

Shell Environments:

Stack size set to unlimited via "ulimit -s unlimited"

Processes were bound to CPUs using submit=pbind

Default BIOS setting was used

This result was measured on the Sun Fire X4200. In addition, Sun has submitted the same result for the Sun Fire X4100, which is electronically equivalent to the Sun Fire X4200.