




# CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

**Hewlett-Packard Company**  
ProLiant DL585 G2 (AMD Opteron (TM) 8220SE)

SPECfp\_rate2000 = **80.6**  
SPECfp\_rate\_base2000 = **73.5**

SPEC license #: 3 Tested by: Hewlett-Packard Company Test date: Sep-2006 Hardware Avail: Sep-2006 Software Avail: Apr-2006

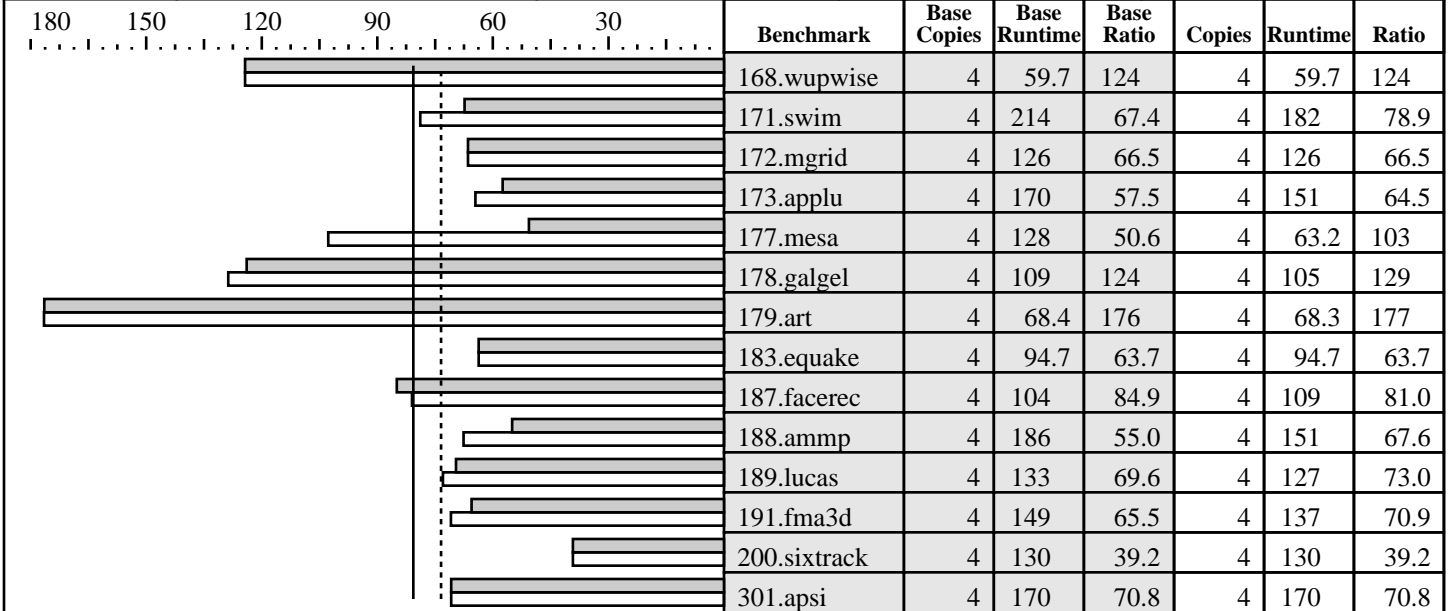

### Hardware

CPU: AMD Opteron (TM) 8220SE  
 CPU MHz: 2800  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip  
 CPU(s) orderable: 2,4 chips  
 Parallel: No  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 1 MB I+D on chip per core  
 L3 Cache: N/A  
 Other Cache: N/A  
 Memory: 16 GB (8x2 GB PC2-5300P CL5.0)  
 Disk Subsystem: 1x36 GB 10 K SAS  
 Other Hardware:

### Software

Operating System: Windows Server 2003 Enterprise SP1  
 Compiler: Intel C++ Compiler for 32-bit applications, (version 9.1 Build 20060323Z)  
 Intel Fortran Compiler for 32-bit applications, (version 9.1 build 20060323Z)  
 PGI Fortran compiler 6.0-8 for Windows XP (32-bit)  
 PGI C compiler 6.0-8 for Windows XP (32-bit)  
 Microsoft Visual Studio .NET 7.0.9466 (for libraries)  
 AMD Core Math Library V3.5.0  
 File System: NTFS  
 System State: Default

## Notes/Tuning Information

```
+FDO: PASS1=-Qprof_gen PASS2=-Qprof_use (Intel compiler)
+FDO*: PASS1=-Mpfi PASS2=-Mpfo (PGI compiler)
+ACML is linking with AMD Core Math Library V3.5.0
ifort is the Intel Fortran compiler, icl is the Intel C++ compiler and
pgf90 is the PGI Fortran compiler, pgcc is the PGI C compiler.
Base tuning for C programs:      pgcc -fastsse -Mipa=fast,inline
Base tuning for FORTRAN programs: pgf90 -fastsse -Mipa=fast,inline +FDO* ONESTEP=1
Portability flags:
  178.galgel: -Mfixed
Peak tuning:
168.wupwise:      pgf90 basepeak=yes
171.swim:         ifort -Qipo -O3 -QaxN -QxW +FDO -Qunroll0 ONESTEP=1
172.mgrid:       pgf90 basepeak=yes
173.applu:       ifort -Qipo -O3 -QaxN -QxW +FDO -auto ONESTEP=1
177.mesa:        icl -Qipo -arch:SSE2 +FDO -Qunroll1 -Qansi_alias ONESTEP=1
                  -Qoption,c,-ip_ninl_max_stats=1500,-ip_ninl_max_total_stats=4500
178.galgel:      pgf90 -fastsse -Mipa=fast,safe RM_SOURCES=lapak.f90 -Munix +ACML ONESTEP=1
```



# CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Hewlett-Packard Company  
ProLiant DL585 G2 (AMD Opteron (TM) 8220SE)

SPECfp\_rate2000 = 80.6  
SPECfp\_rate\_base2000 = 73.5

SPEC license #: 3 | Tested by: Hewlett-Packard Company | Test date: Sep-2006 | Hardware Avail: Sep-2006 | Software Avail: Apr-2006

## Notes/Tuning Information (Continued)

```

179.art:          pgcc -fastsse -Mipa=fast,inline
183.quake:       icl basepeak=yes
187.facerec:     ifort -Qipo -QxW +FDO -Qunroll3 ONESTEP=1
                  -Qoption,f,-ip_ninl_max_stats=2500,-ip_ninl_max_total_stats=7000
188.ampp:        icl -Oa -arch:SSE2 -Zp4 -Qansi_alias ONESTEP=1
189.lucas:       ifort -Qipo -QxW -Qunroll1 ONESTEP=1
191.fma3d:       ifort -Qipo -QaxN -QxW +FDO -Qansi-alias- ONESTEP=1
200.sixtrack:   pgf90 basepeak=yes
301.apsi:        pgf90 basepeak=yes

```

### BIOS Configuration Notes

Node Interleaving is Disabled

### Other Configuration Notes

The start /b /wait /affinity command is used to bind CPU(s) to processes.