SPEC CINT95rate Results

©Copyright 1995, Standard Performance Evaluation Corporation

Hewlett-Packard
HP 9000 Model N4000

SPECint_rate95 = 372

SPECint_rate_base95 = 336

SPEC license # 3	Tested By: HP Richardson, TX	Test Date: Jan-2000	Hardware Avail: Apr-2000	Software Avail: Apr-2000

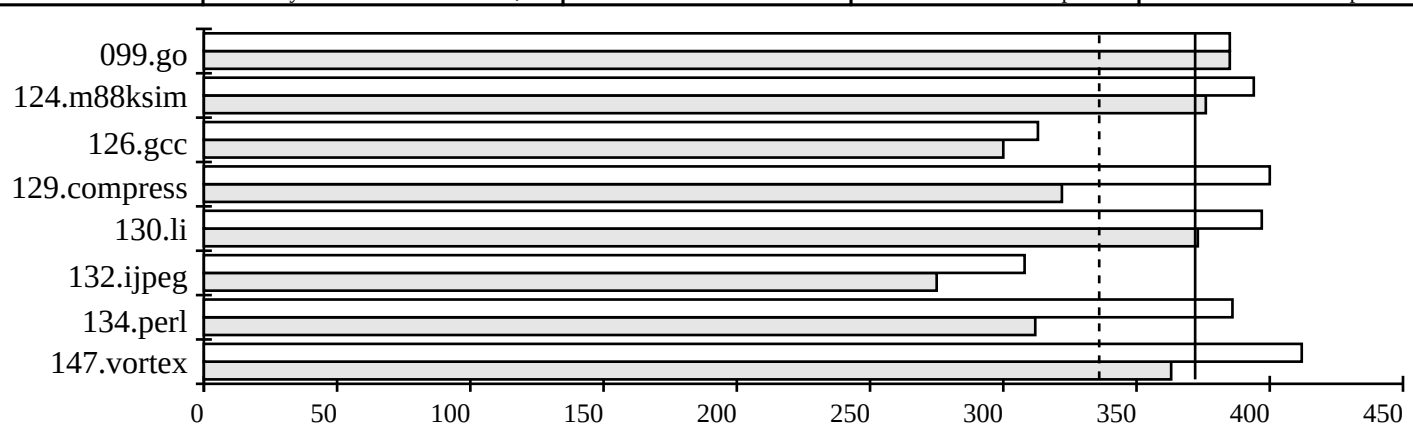

Hardware/Software Configuration for:
HP 9000 Model N4000

Hardware

Model Name:	HP 9000 Model N4000
CPU:	552 MHz PA-RISC 8600
FPU:	Integrated
Number of CPU(s):	1
Primary Cache:	512KBI+1MBD
Secondary Cache:	None
Other Cache:	None
Memory:	8GB
Disk Subsystem:	1x9GB
Other Hardware:	None

Software

Operating System:	HP-UX B.11.00 U 9000/800 74565 unlimited-user
Compiler:	HP92453-01 A.11.01.00 HP C Compiler
File System:	HP-UX VxFS
System State:	Multi-user

Benchmark # and Name	Base Copies	Base Run Time	Base SPEC Ratio	Copies	Run Time	SPEC Ratio
099.go	1	108	385	1	108	385
124.m88ksim	1	45.5	376	1	43	394
126.gcc	1	51.0	300	1	49	313
129.compress	1	50.3	322	1	40	400
130.li	1	45.8	373	1	43	397
132.ijpeg	1	78.6	275	1	70	308
134.perl	1	54.8	312	1	44	386
147.vortex	1	66.9	363	1	59	412
SPECint_rate_base95 (G. Mean)			336			
SPECint_rate95 (G. Mean)						372

Notes/Tuning Information

```
Portability flag: -Ae

Base flags:
All: fastmem.o +Oall +I/+P +Ostaticprediction

Peak flags:
All:  +ESfic +ESlit +I/+P +Ostaticprediction
Linker Flag: -Wl,-aarchive
099: +O4 +Oentrysched +Olibcalls +Onolimit +Onoloopunroll
124: +Oall +Onoparmsoverlap +Optrs_strongly_typed
126: +O4 +Odataprefetch +Olibcalls +Onolimit +Optrs_ansi -DSPEC
129: +Oall +Odataprefetch +Optrs_strongly_typed
130: +ESsfc +Oall +Oinline_budget=400 +Onoptrs_to_globals
132: +ESsfc +Oall +Odataprefetch +Optrs_strongly_typed
134: +ESsfc +O4 -Ac +Oinline_budget=70 +Olibcalls +Onolimit
147: +Oall +Oinline_budget=800 +Optrs_strongly_typed -lm fastmem.o
Note: +I/+P indicates use of profile-based optimization
```