SPEC CFP95rate Results

©Copyright 1995, Standard Performance Evaluation Corporation

Fujitsu Limited
GP7000F Model 200 (300MHz)

SPECfp_rate95 = 208

SPECfp_rate_base95 = 196

SPEC license # 19 | Tested By: Fujitsu Limited | Test Date: Mar-2000 | Hardware Avail: Feb-2000 | Software Avail: Oct-1999

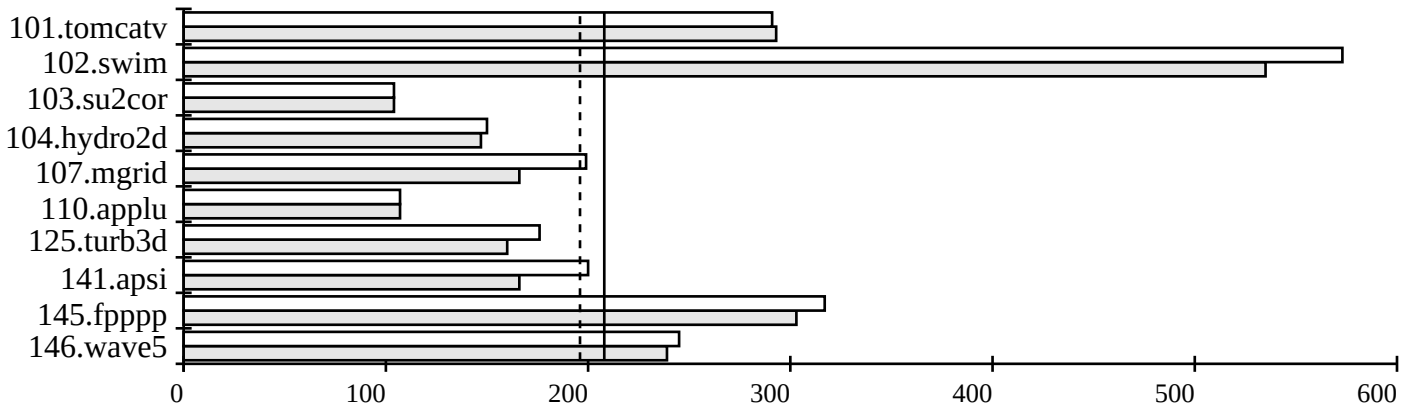

Hardware/Software Configuration for:
GP7000F Model 200 (300MHz)

Hardware

Model Name:	Fujitsu GP7000F Model 200
CPU:	296MHz SPARC64 GP
FPU:	Integrated
Number of CPU(s):	1
Primary Cache:	64KBI+64KBD on chip, 4way
Secondary Cache:	4.0MB(I+D) off chip
Other Cache:	None
Memory:	2048MB
Disk Subsystem:	1 x 4.5GB
Other Hardware:	Ethernet

Software

Operating System:	Solaris 7 HW:8/99
Compiler:	Fujitsu Fortran V4.0.2
File System:	UFS
System State:	Multi User
Kernel Extensions:	set consistent_coloring=1

Benchmark # and Name	Base Copies	Base Run Time	Base SPEC Ratio	Copies	Run Time	SPEC Ratio
101.tomcatv	1	114	293	1	115	291
102.swim	1	145	535	1	135	573
103.su2cor	1	121	104	1	121	104
104.hydro2d	1	147	147	1	144	150
107.mgrid	1	135	166	1	113	199
110.applu	1	185	107	1	185	107
125.turb3d	1	231	160	1	210	176
141.apsi	1	114	166	1	95	200
145.fpppp	1	285	303	1	273	317
146.wave5	1	113	239	1	110	245
SPECfp_rate_base95 (G. Mean)			196			
SPECfp_rate95 (G. Mean)						208

Notes/Tuning Information

```
Baseline flags were: -Kfast,V8PFMADD,prefetch,gs
Nonbaseline: PEAKOPT = -X7 -Kfast,V8PFMADD,gs,prefetch  EXTRA_FFLAGS = -dn
101.tomcatv: ${PEAKOPT} -KGREG,eval
102.swim: ${PEAKOPT} -KGREG,preex -Koffset=140
103.su2cor: ${PEAKOPT}
104.hydro2d: ${PEAKOPT} -Keval
107.mgrid: ${PEAKOPT} -KGREG,commonpad,eval
110.applu: ${PEAKOPT} -KGREG
125.turb3d: ${PEAKOPT} -KGREG,commonpad,eval -Ksp=0 -x-
141.apsi: ${PEAKOPT} -KGREG,auto,preex,eval
145.fpppp: ${PEAKOPT} -Keval,nounroll,preex
146.wave5: ${PEAKOPT} -KGREG,auto,nofuse -x10
Shell limits: ulimit -n 1024; ulimit -s 81920;
```

For More Information Contact: SPEC info@spec.org http://www.spec.org/