SPEC CFP95 Results

©Copyright 1995, Standard Performance Evaluation Corporation

Hewlett-Packard
HP 9000 Model J210XC

SPECfp95 = 8.30

SPECfp_base95 = 8.30

SPEC license # 3	Tested By: HP Cupertino, CA	Test Date: Jan-96	Hardware Avail: Mar-96	Software Avail: Feb-96

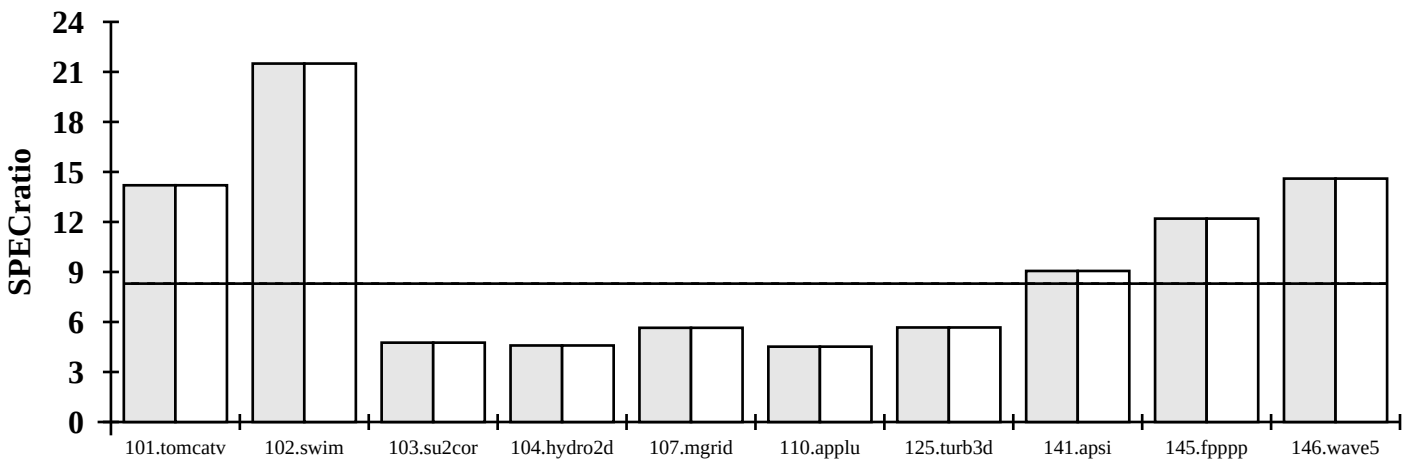

Hardware/Software Configuration for:
HP 9000 Model J210XC

Hardware

Model Name:	HP 9000 Model J210XC
CPU:	120 MHz PA-RISC 7200
FPU:	Integrated
Number of CPU(s):	1
Primary Cache:	1MBI+1MBD off-chip
Secondary Cache:	None
Other Cache:	None
Memory:	256MB
Disk Subsystem:	2 HP C2490WD 2 GB
Other Hardware:	None

Software

Operating System:	HP-UX B.10.10
Compiler:	HP FORTRAN B3906AA B.10.00.01.00
File System:	HP-UX
System State:	Multi-user

Benchmark # and Name	Reference Time	Base Run Time	Base SPEC Ratio	Run Time	SPEC Ratio
101.tomcatv	3700	261	14.2	261	14.2
102.swim	8600	401	21.5	401	21.5
103.su2cor	1400	294	4.76	294	4.76
104.hydro2d	2400	523	4.59	523	4.59
107.mgrid	2500	442	5.65	442	5.65
110.applu	2200	487	4.52	487	4.52
125.turb3d	4100	723	5.67	723	5.67
141.apsi	2100	232	9.06	232	9.06
145.fpppp	9600	788	12.2	788	12.2
146.wave5	3000	205	14.6	205	14.6
SPECfp_base95 (G. Mean)			8.30		
		SPECfp95 (G. Mean)			8.30

Notes/Tuning Information

```
BASE FLAGS:
All: +Oall +Onofastaccess
Linker Flag: All: -Wl,-a,archive

PEAK FLAGS:
Same as BASE FLAGS.
```

For More Information Contact:
SPEC
10754 Ambassador Drive, Suite 201
Manassas, VA 22110
(703) 331-0180
info@specbench.org
http://www.specbench.org