SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R515 (AMD Opteron 4162 EE, 1.70 GHz)

SPECfp®_rate2006 = 134

SPECfp_rate_base2006 = 123

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Jul-2010
Hardware Availability: Jul-2010
Software Availability: Jul-2010

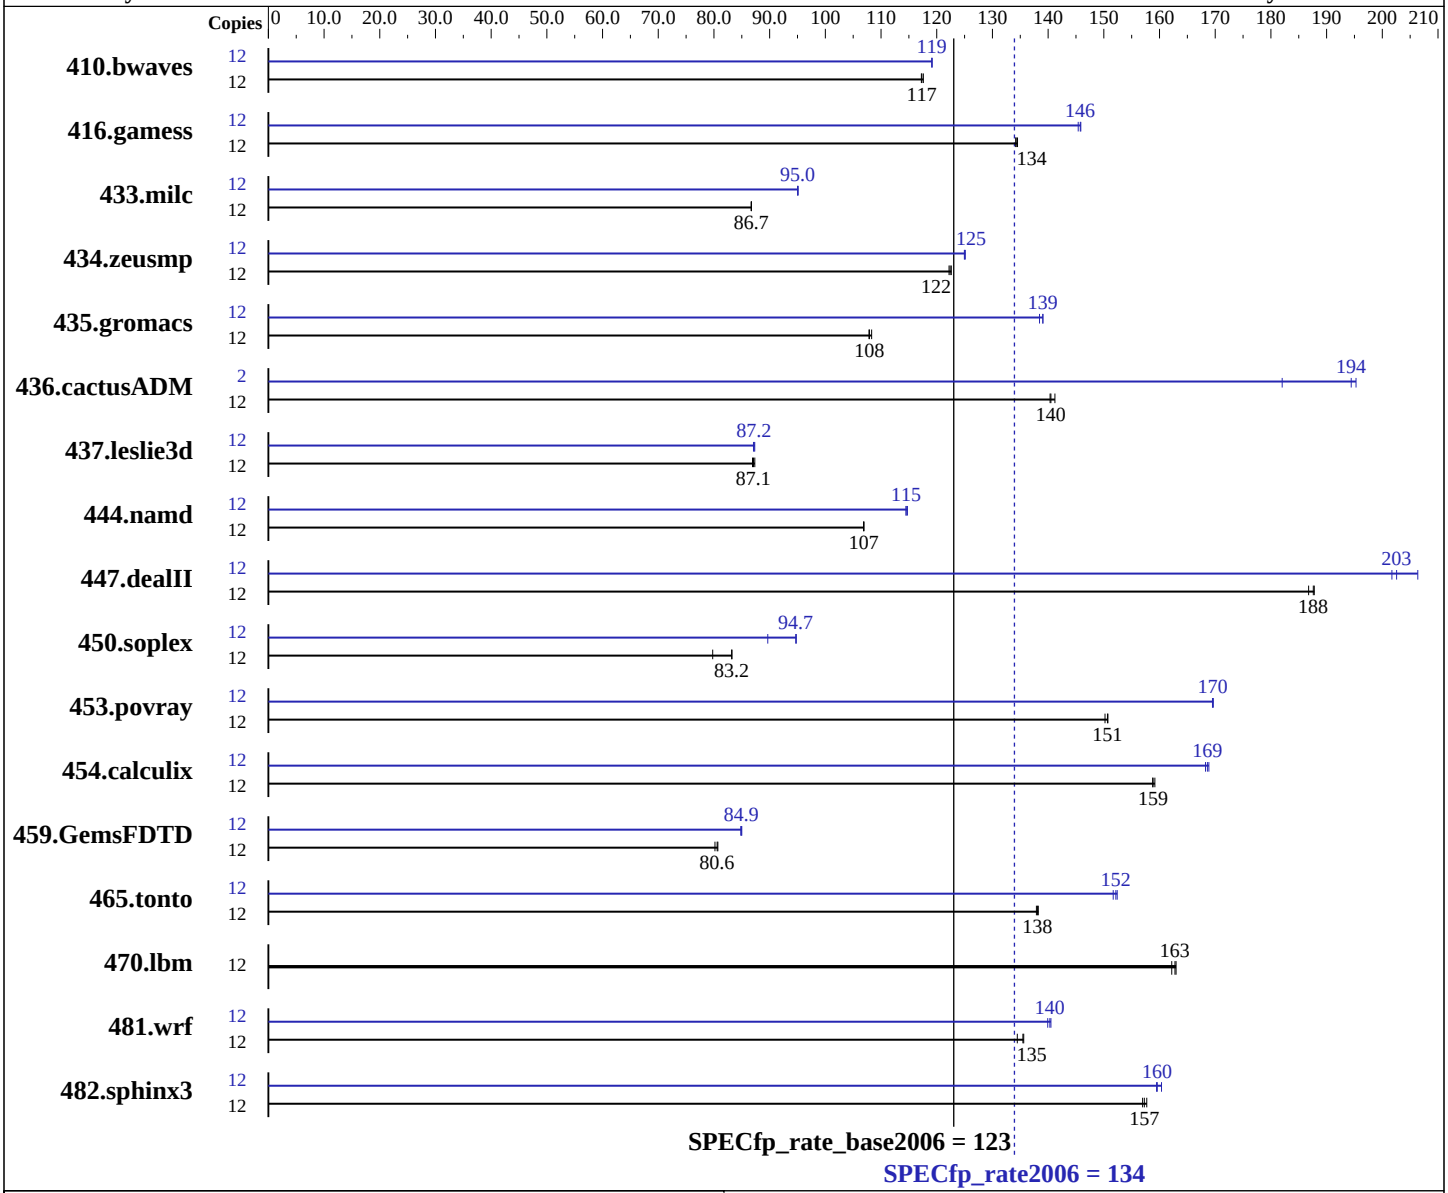

Hardware

CPU Name:	AMD Opteron 4162 EE
CPU Characteristics:	
CPU MHz:	1700
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 11 (x86_64) Kernel 2.6.27.19-5-default
Compiler:	x86 Open64 4.2.4 Compiler Suite (from AMD)
Auto Parallel:	Yes
File System:	ext3
System State:	Run level 3 (Full multiuser with network)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other Software:	None

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R515 (AMD Opteron 4162 EE, 1.70 GHz)

SPECfp_rate2006 = 134

SPECfp_rate_base2006 = 123

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Jul-2010
Hardware Availability: Jul-2010
Software Availability: Jul-2010

L3 Cache: 6 MB I+D on chip per chip
Other Cache: None
Memory: 32 GB (8 x 4 GB 2Rx4 PC3-10600R-9, ECC)
Disk Subsystem: 1 x 146 GB 10000 RPM SAS
Other Hardware: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	12	**1390**	**117**	1387	118	1391	117	12	**1369**	**119**	1369	119	1369	119
416.gamess	12	**1750**	**134**	1751	134	1747	135	12	1611	146	1616	145	**1612**	**146**
433.milc	12	1270	86.7	**1270**	**86.7**	1271	86.7	12	**1159**	**95.0**	1158	95.1	1159	95.0
434.zeusmp	12	**892**	**122**	894	122	891	123	12	**873**	**125**	874	125	873	125
435.gromacs	12	795	108	**794**	**108**	791	108	12	**616**	**139**	616	139	619	138
436.cactusADM	12	**1021**	**140**	1022	140	1015	141	2	131	182	122	195	**123**	**194**
437.leslie3d	12	**1295**	**87.1**	1292	87.3	1298	86.9	12	1295	87.1	1292	87.3	**1293**	**87.2**
444.namd	12	**900**	**107**	900	107	900	107	12	**840**	**115**	839	115	841	114
447.dealII	12	**732**	**188**	735	187	731	188	12	**678**	**203**	681	202	665	206
450.soplex	12	1254	79.8	1202	83.2	**1203**	**83.2**	12	1116	89.7	1056	94.8	**1057**	**94.7**
453.povray	12	425	150	424	151	**424**	**151**	12	376	170	377	170	**376**	**170**
454.calculix	12	622	159	624	159	**623**	**159**	12	588	168	**587**	**169**	586	169
459.GemsFDTD	12	1588	80.2	1578	80.7	**1580**	**80.6**	12	1501	84.8	**1499**	**84.9**	1498	85.0
465.tonto	12	856	138	**855**	**138**	854	138	12	**776**	**152**	775	152	778	152
470.lbm	12	1012	163	1017	162	**1013**	**163**	12	1012	163	1017	162	**1013**	**163**
481.wrf	12	**989**	**135**	988	136	997	134	12	958	140	954	141	**955**	**140**
482.sphinx3	12	1490	157	**1487**	**157**	1483	158	12	**1465**	**160**	1467	159	1458	160

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152'  was used to set environment locked pages in memory limit

Set vm/nr_hugepages=5400 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

General Notes

```
Environment variables set by runspec before the start of the run:
HUGETLB_LIMIT = "450"
LD_LIBRARY_PATH = "/root/cpu2006-1.1/amd1002-rate-libs-revC/64:/root/cpu2006-1.1/amd1002-rate-libs-revC/32"
OMP_NUM_THREADS = "6"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
http://developer.amd.com/cpu/open64

Binaries were compiled on SLES10 SP2 with binutils 2.18
```

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Fortran benchmarks:
openf95

Benchmarks using both Fortran and C:
opencc openf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
```
-march=barcelona -mso -Ofast -OPT:malloc_alg=1 -HP:bdt=2m
```

C++ benchmarks:
```
-march=barcelona -mso -Ofast -static -INLINE:aggressive=on
-OPT:malloc_alg=1 -HP:bdt=2m
```

Fortran benchmarks:
```
-march=barcelona -mso -Ofast -HP
```

Benchmarks using both Fortran and C:
```
-march=barcelona -mso -Ofast -OPT:malloc_alg=1 -HP:bdt=2m -HP
```

Peak Compiler Invocation

C benchmarks:
```
opencc
```

C++ benchmarks:
```
openCC
```

Fortran benchmarks:
```
openf95
```

Benchmarks using both Fortran and C:
```
opencc openf95
```

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -march=barcelona -mso -Ofast -CG:movnti=1
-CG:local_sched_alg=1 -CG:locs_shallow_depth=1
-HP:bdt=2m:heap=2m -LNO:prefetch=3

470.lbm: basepeak = yes

482.sphinx3: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:malloc_alg=2
-CG:sse_cse_regs=0 -CG:locs_shallow_depth=1 -CG:cmp_peep=on
-CG:local_sched_alg=1 -INLINE:aggressive=on

C++ benchmarks:

444.namd: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:ignore_feedback=off
-CG:local_sched_alg=2 -CG:load_exe=0 -CG:compute_to=on
-OPT:unroll_size=256 -fno-exceptions -HP:bdt=2m:heap=2m

447.dealII: -march=barcelona -mso -Ofast -static -INLINE:aggressive=on
-LNO:opt=0 -fno-emit-exceptions -m32
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on
-CG:cmp_peep=on -TENV:frame_pointer=off

450.soplex: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -INLINE:aggressive=on
-OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
-OPT:fold_unsigned_relops=on -OPT:malloc_alg=1
-CG:load_exe=0 -fno-exceptions -m32 -HP:bdt=2m

453.povray: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on

Fortran benchmarks:

410.bwaves: -march=barcelona -mso -O3 -OPT:Ofast -OPT:treeheight=on
-LNO:blocking=off -LNO:prefetch_ahead=5
-LNO:ignore_feedback=off -WOPT:aggstr=0 -HP:bdt=2m:heap=2m
-CG:cmp_peep=on

416.gamess: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0
-LNO:prefetch=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll_size=256
-HP:bdt=2m:heap=2m

434.zeusmp: -march=barcelona -mso -Ofast -LNO:blocking=off
-LNO:interchange=off -OPT:treeheight=on -OPT:unroll_size=256
-CG:cmp_peep=on -GRA:prioritize_by_density=on -HP

Continued on next page

Peak Optimization Flags (Continued)

437.leslie3d: `-march=barcelona -mso -Ofast -HP:bdt=2m:heap=2m`

459.GemsFDTD: `-march=barcelona -mso -Ofast -LNO:fission=2 -LNO:prefetch_ahead=1 -CG:load_exe=0 -CG:local_sched_alg=1 -HP`

465.tonto: `-march=barcelona -mso -Ofast -OPT:alias=no_f90_pointer_alias -LNO:blocking=off -CG:load_exe=1 -IPA:plimit=525 -HP`

Benchmarks using both Fortran and C:

435.gromacs: `-march=barcelona -mso -Ofast -OPT:rsqrt=2 -HP:bdt=2m:heap=2m`

436.cactusADM: `-march=barcelona -mso -fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-Ofast -apo -LNO:prefetch_ahead=1 -HP:bdt=2m:heap=2m -LANG:heap_allocation_threshold=100`

454.calculix: `-march=barcelona -mso -Ofast -CG:load_exe=0 -CG:ptr_load_use=0 -CG:local_sched_alg=2 -CG:compute_to=on -LNO:prefetch_ahead=30 -WOPT:unroll=2 -GRA:optimize_boundary=on -HP:bdt=2m:heap=2m`

481.wrf: `-march=barcelona -mso -Ofast -LNO:blocking=off -LNO:prefetch_ahead=10 -LANG:copyinout=off -IPA:callee_limit=5000 -GRA:prioritize_by_density=on -m3dnow -HP`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.html
http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.xml
http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 14:31:40 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 12 October 2010.