



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp®_rate2006 = 44.1

Acer Altos R5250 (AMD Opteron 2356)

SPECfp_rate_base2006 = 40.2

CPU2006 license: 97


Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: May-2008

Hardware Availability: Mar-2008

Software Availability: May-2008

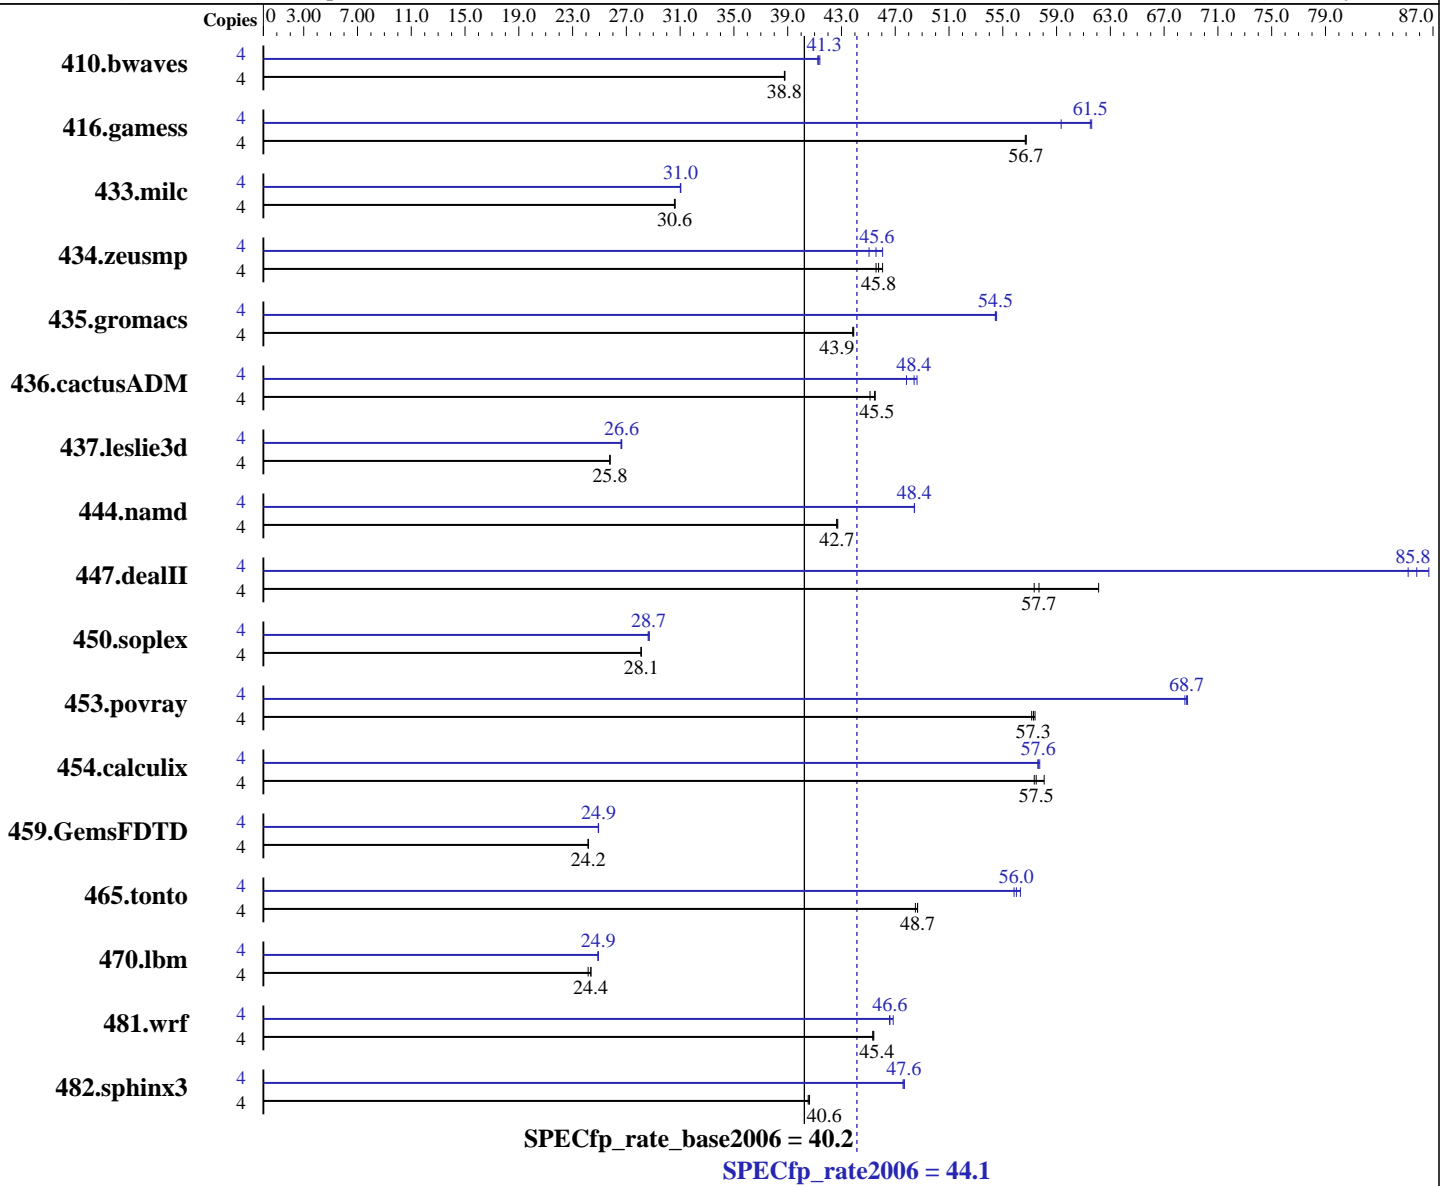

Hardware

CPU Name: AMD Opteron 2356
 CPU Characteristics:
 CPU MHz: 2300
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

Software

Operating System: SuSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.1
 Auto Parallel: No
 File System: ReiserFS
 System State: Default
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp_rate2006 = 44.1

Acer Altos R5250 (AMD Opteron 2356)

SPECfp_rate_base2006 = 40.2

CPU2006 license: 97

Test date: May-2008

Test sponsor: Acer Incorporated

Hardware Availability: Mar-2008

Tested by: Acer Incorporated

Software Availability: May-2008

L3 Cache: 2 MB I+D on chip per chip
Other Cache: None
Memory: 8 GB (4x2GB, DDR2-667, CL5, Reg, Dual Rank)
Disk Subsystem: 1x160GB SATA, 7200 RPM
Other Hardware: None

Other Software: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	4	1401	38.8	1402	38.8	1403	38.8	4	1313	41.4	1318	41.2	1316	41.3		
416.gamess	4	1382	56.7	1381	56.7	1380	56.7	4	1320	59.3	1273	61.5	1271	61.6		
433.milc	4	1199	30.6	1201	30.6	1200	30.6	4	1183	31.0	1184	31.0	1183	31.0		
434.zeusmp	4	795	45.8	790	46.1	799	45.6	4	799	45.6	808	45.1	790	46.1		
435.gromacs	4	650	43.9	651	43.9	651	43.8	4	524	54.5	524	54.5	525	54.4		
436.cactusADM	4	1050	45.5	1051	45.5	1059	45.1	4	999	47.8	983	48.6	988	48.4		
437.leslie3d	4	1458	25.8	1458	25.8	1459	25.8	4	1411	26.7	1414	26.6	1411	26.6		
444.namd	4	751	42.7	752	42.7	752	42.6	4	663	48.4	662	48.4	662	48.4		
447.dealII	4	798	57.3	737	62.1	793	57.7	4	537	85.2	528	86.7	533	85.8		
450.soplex	4	1187	28.1	1187	28.1	1187	28.1	4	1164	28.7	1166	28.6	1162	28.7		
453.povray	4	372	57.3	371	57.4	372	57.1	4	310	68.7	310	68.5	310	68.7		
454.calculix	4	574	57.5	568	58.1	576	57.3	4	571	57.8	572	57.6	573	57.6		
459.GemsFDTD	4	1757	24.2	1755	24.2	1756	24.2	4	1704	24.9	1702	24.9	1702	24.9		
465.tonto	4	812	48.5	809	48.7	809	48.7	4	699	56.3	703	56.0	705	55.8		
470.lbm	4	2275	24.2	2256	24.4	2256	24.4	4	2207	24.9	2207	24.9	2208	24.9		
481.wrf	4	985	45.4	986	45.3	984	45.4	4	959	46.6	959	46.6	954	46.8		
482.sphinx3	4	1919	40.6	1924	40.5	1921	40.6	4	1638	47.6	1636	47.6	1635	47.7		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'numactl' was used to bind copies to the cores
Environment variable PGI_HUGE_PAGES set to 150
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 1228800' was used to set environment locked pages in memory quantity
Set vm/nr_hugepages=600 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

Base Compiler Invocation

C benchmarks:
pgcc

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp_rate2006 = 44.1

Acer Altos R5250 (AMD Opteron 2356)

SPECfp_rate_base2006 = 40.2

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: May-2008

Hardware Availability: Mar-2008

Software Availability: May-2008

Base Compiler Invocation (Continued)

C++ benchmarks:

pgcpp

Fortran benchmarks:

pgf95

Benchmarks using both Fortran and C:

pgcc pgf95

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -Mnomain
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

```
-fast -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc=huge:150
-tp barcelona-64 -Bstatic_pgi
```

C++ benchmarks:

```
-fast -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc=huge:150
--zc_eh -tp barcelona-64 -Bstatic_pgi
```

Fortran benchmarks:

```
-fast -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc=huge:150
-tp barcelona-64 -Bstatic_pgi
```

Benchmarks using both Fortran and C:

```
-fast -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc=huge:150
-tp barcelona-64 -Bstatic_pgi
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp_rate2006 = 44.1

Acer Altos R5250 (AMD Opteron 2356)

SPECfp_rate_base2006 = 40.2

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: May-2008

Hardware Availability: Mar-2008

Software Availability: May-2008

Base Other Flags

C benchmarks:

-w -Mipa=jobs:4

C++ benchmarks:

-w -Mipa=jobs:4

Fortran benchmarks:

-w -Mipa=jobs:4

Benchmarks using both Fortran and C:

-w -Mipa=jobs:4

Peak Compiler Invocation

C benchmarks (except as noted below):

pathcc

433.milc: pgcc

C++ benchmarks (except as noted below):

pathCC

444.namd: pgcpp

Fortran benchmarks (except as noted below):

pathf95

410.bwaves: pgf95

434.zeusmp: pgf95

Benchmarks using both Fortran and C (except as noted below):

pgcc pgf95

436.cactusADM: pathcc pathf95

481.wrf: pathcc pathf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64 -Mnomain

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp_rate2006 = 44.1

Acer Altos R5250 (AMD Opteron 2356)

SPECfp_rate_base2006 = 40.2

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: May-2008

Hardware Availability: Mar-2008

Software Availability: May-2008

Peak Portability Flags (Continued)

```

436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -fastsse -Msmartalloc=huge:150 -Msafeptr -Mfprelaxed
-Mipa=inline -Mipa=arg -Mipa=const -Mipa=ptr -Mipa=shape
-tp barcelona-64 -Bstatic_pgi

```

```

470.lbm: -march=barcelona -Ofast -m3dnow

```

```

482.sphinx3: -march=barcelona -Ofast

```

C++ benchmarks:

```

444.namd: -Mphi(pass 1) -Mipa=fast(pass 2) -Mipa=inline(pass 2)
-Mpfo(pass 2) -fast -Mfprelaxed -Msmartalloc=huge:150
--zc_eh -Mnodepchk -Munroll=n:4 -Munroll=m:8
-tp barcelona-64 -Bstatic_pgi

```

```

447.deallI: -march=barcelona -Ofast -static -INLINE:aggressive=on
-OPT:malloc_alg=1 -m32 -fno-exceptions

```

```

450.soplex: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -m32 -O3 -TENV:frame_pointer=off
-LNO:prefetch=1

```

```

453.povray: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -CG:load_exe=0

```

Fortran benchmarks:

```

410.bwaves: -Mphi(pass 1) -Mipa=fast(pass 2) -Mipa=inline(pass 2)
-Mpfo(pass 2) -fastsse -Mfprelaxed -Msmartalloc
-Mprefetch=distance:12 -Mprefetch=nta -tp barcelona-64
-Bstatic_pgi

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp_rate2006 = 44.1

Acer Altos R5250 (AMD Opteron 2356)

SPECfp_rate_base2006 = 40.2

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: May-2008

Hardware Availability: Mar-2008

Software Availability: May-2008

Peak Optimization Flags (Continued)

416.gamess: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O2 -OPT:Ofast -OPT:ro=3
-OPT:unroll_size=256

434.zeusmp: -fastsse -Mfprelaxed -Msmartalloc=huge:150 -Mipa=fast
-Mipa=inline -tp barcelona-64 -Bstatic_pgi

437.leslie3d: -march=barcelona -Ofast -m3dnow -OPT:unroll_size=256
-CG:load_exe=0 -OPT:malloc_alg=1

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2
-OPT:malloc_alg=1

465.tonto: -march=barcelona -Ofast -OPT:malloc_alg=1
-OPT:alias=no_f90_pointer_alias -LNO:blocking=off
-CG:load_exe=1 -IPA:plimit=525

Benchmarks using both Fortran and C:

435.gromacs: -fast -Mfpapprox=rsqrt -Mipa=fast -Mipa=inline -Mfprelaxed
-Msmartalloc=huge:150 -tp barcelona-64 -Bstatic_pgi

436.cactusADM: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -WOPT:aggstr=0

454.calculix: -fastsse -Mfprelaxed -Msmartalloc=huge:150 -Mipa=fast
-Mipa=inline -tp barcelona-64 -Bstatic_pgi

481.wrf: -march=barcelona -Ofast -LNO:blocking=off
-LNO:prefetch_ahead=10 -OPT:malloc_alg=1 -m3dnow
-LANG:copyinout=off -IPA:callee_limit=5000

Peak Other Flags

C benchmarks:

433.milc: -w -Mipa=jobs:4

C++ benchmarks:

444.namd: -w -Mipa=jobs:4(pass 2)

Fortran benchmarks:

410.bwaves: -w -Mipa=jobs:4(pass 2)

434.zeusmp: -w -Mipa=jobs:4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp_rate2006 = 44.1

Acer Altos R5250 (AMD Opteron 2356)

SPECfp_rate_base2006 = 40.2

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: May-2008

Hardware Availability: Mar-2008

Software Availability: May-2008

Peak Other Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: -w -Mipa=jobs:4

454.calculix: -w -Mipa=jobs:4

The flags file that was used to format this result can be browsed at
<http://www.spec.org/cpu2006/flags/amd123GH-flags.20090713.01.html>

You can also download the XML flags source by saving the following link:
<http://www.spec.org/cpu2006/flags/amd123GH-flags.20090713.01.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 17:38:20 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 25 June 2008.