



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DX58SO2 Motherboard (Intel Core i7-975 Extreme Edition)

SPECint®_rate2006 = 146

SPECint_rate_base2006 = 134

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2011

Hardware Availability: Mar-2011

Software Availability: Apr-2011

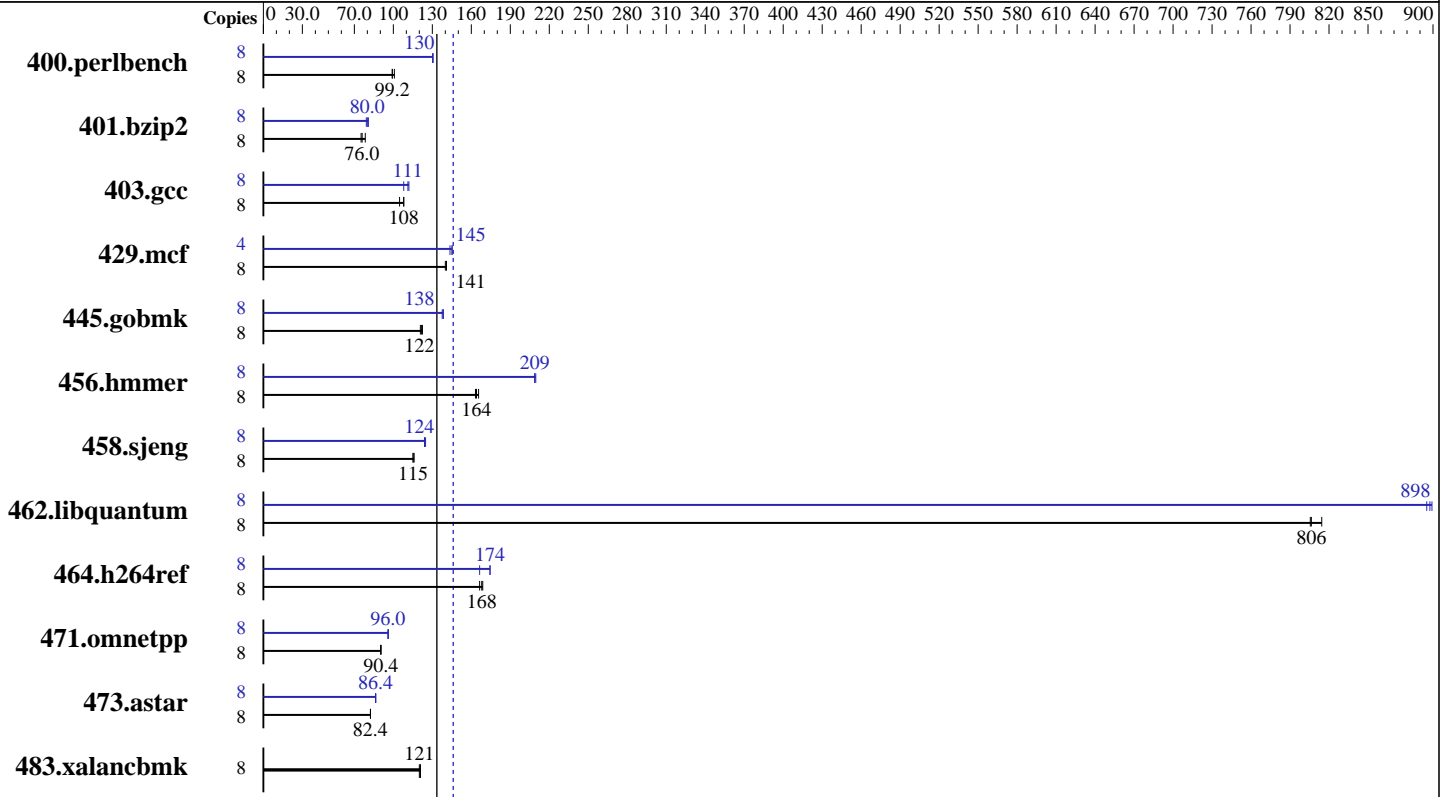

SPECint_rate2006 = 146

SPECint_rate_base2006 = 134

Hardware

CPU Name: Intel Core i7-975 Extreme Edition
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz
 CPU MHz: 3333
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 12 GB (3 x 4 GB 2Rx8 PC3-8600U-9)
 Disk Subsystem: Seagate 1 TB SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: Windows 7 Ultimate (64-bit)
 Compiler: Intel C++ Compiler XE for IA32 and Intel 64 Version 12.0.3.176 Build 20110309
 Microsoft Visual Studio 2008 Professional SP1 (for libraries)
 Auto Parallel: No
 File System: NTFS
 System State: Default
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap Library Version 9.01 from <http://www.microquill.com/>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DX58SO2 Motherboard (Intel Core i7-975 Extreme Edition)

SPECint_rate2006 = 146

SPECint_rate_base2006 = 134

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2011

Hardware Availability: Mar-2011

Software Availability: Apr-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	773	101	788	99.2	788	99.2	8	601	130	600	130	601	130
401.bzip2	8	1011	76.0	986	78.4	1023	75.2	8	970	79.2	960	80.8	965	80.0
403.gcc	8	617	105	597	108	597	108	8	596	108	578	111	574	112
429.mcf	8	519	141	518	141	520	140	4	254	144	251	145	252	145
445.gobmk	8	688	122	686	122	693	121	8	607	138	608	138	608	138
456.hammer	8	456	163	454	164	451	166	8	356	210	357	209	357	209
458.sjeng	8	837	116	837	115	838	115	8	779	124	780	124	777	125
462.libquantum	8	206	806	204	814	206	806	8	185	898	184	899	185	895
464.h264ref	8	1051	169	1062	166	1052	168	8	1015	174	1062	166	1013	174
471.omnetpp	8	555	90.4	555	90.4	555	90.4	8	520	96.0	520	96.0	520	96.0
473.astar	8	681	82.4	681	82.4	681	82.4	8	647	86.4	647	86.4	648	86.4
483.xalanbmk	8	456	121	459	120	456	121	8	456	121	459	120	456	121

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

The start command with the /affinity switch was used to bind processes to cores

General Notes

Tested systems can be used with Shin-G ATX case,

PC Power and Cooling 1200W power supply

System was configured with an ATI HD5770 discrete graphics card

Base Compiler Invocation

C benchmarks:

icl -Qvc9 -Qstd=c99

C++ benchmarks:

icl -Qvc9

Base Portability Flags

403.gcc: -DSPEC_CPU_WIN32

464.h264ref: -DWIN32 -DSPEC_CPU_NO_INTTYPES

483.xalanbmk: -Qoption, cpp, --no_wchar_t_keyword



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DX58SO2 Motherboard (Intel Core i7-975 Extreme Edition)

SPECint_rate2006 = 146

SPECint_rate_base2006 = 134

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2011

Hardware Availability: Mar-2011

Software Availability: Apr-2011

Base Optimization Flags

C benchmarks:

`-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000`

C++ benchmarks:

`-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features /F512000000 shlw32M.lib -link /FORCE:MULTIPLE`

Base Other Flags

C benchmarks:

`403.gcc: -Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):

`icl -Qvc9 -Qstd=c99`

`456.hmmer: C:/Program Files (x86)/Intel/ComposerXE-2011/bin/intel64/icl.exe`

`458.sjeng: C:/Program Files (x86)/Intel/ComposerXE-2011/bin/intel64/icl.exe`

`462.libquantum: C:/Program Files (x86)/Intel/ComposerXE-2011/bin/intel64/icl.exe -Qstd=c99`

C++ benchmarks (except as noted below):

`icl -Qvc9`

`473.astar: C:/Program Files (x86)/Intel/ComposerXE-2011/bin/intel64/icl.exe`

Peak Portability Flags

`403.gcc: -DSPEC_CPU_WIN32`

`456.hmmer: -DSPEC_CPU_P64`

`458.sjeng: -DSPEC_CPU_P64`

`462.libquantum: -DSPEC_CPU_P64`

`464.h264ref: -DWIN32 -DSPEC_CPU_NO_INTTYPES`

`473.astar: -DSPEC_CPU_P64`

`483.xalancbmk: -Qoption,cpp,--no_wchar_t_keyword`



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DX58SO2 Motherboard (Intel Core i7-975 Extreme Edition)

SPECint_rate2006 = 146

SPECint_rate_base2006 = 134

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2011

Hardware Availability: Mar-2011

Software Availability: Apr-2011

Peak Optimization Flags

C benchmarks:

400.perlbench: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
/F512000000 shlW32M.lib -link /FORCE:MULTIPLE

401.bzip2: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qansi-alias
/F512000000

403.gcc: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

429.mcf: -QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch
/F512000000

445.gobmk: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O2 -Qprec-div- -Qansi-alias /F512000000

456.hmmr: -Qauto-ilp32 -QxSSE4.2(pass 2) -Qprof_gen(pass 1)
-Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch
/F512000000

458.sjeng: -Qauto-ilp32 -QxSSE4.2(pass 2) -Qprof_gen(pass 1)
-Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll4
/F512000000

462.libquantum: -Qauto-ilp32 -QxSSE4.2 -Qipo -O3 -Qprec-div-
-Qopt-prefetch /F512000000

464.h264ref: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias /F512000000

C++ benchmarks:

471.omnetpp: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qansi-alias
-Qopt-ra-region-strategy=block /F512000000 shlW32M.lib
-link /FORCE:MULTIPLE

473.astar: -Qauto-ilp32 -QxSSE4.2 -Qipo -O3 -Qprec-div-
-Qopt-prefetch /F512000000 shlW64M.lib
-link /FORCE:MULTIPLE

483.xalancbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DX58SO2 Motherboard (Intel Core i7-975 Extreme Edition)

SPECint_rate2006 = 146

SPECint_rate_base2006 = 134

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Jul-2011
Hardware Availability: Mar-2011
Software Availability: Apr-2011

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

456.hmmcr: -link -LIBPATH:C:/Program Files (x86)/Intel/ComposerXE-2011/compiler/lib/intel64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib/AMD64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64

458.sjeng: -link -LIBPATH:C:/Program Files (x86)/Intel/ComposerXE-2011/compiler/lib/intel64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib/AMD64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64

462.libquantum: -link -LIBPATH:C:/Program Files (x86)/Intel/ComposerXE-2011/compiler/lib/intel64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib/AMD64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64

C++ benchmarks:

473.astar: -link -LIBPATH:C:/Program Files (x86)/Intel/ComposerXE-2011/compiler/lib/intel64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib/AMD64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12-win32-revB.20110808.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic12-win32-revB.20110808.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Thu Jul 24 00:03:16 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 August 2011.