



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

SPECfp[®]_rate2006 = 122

ACTINA SOLAR 110 S5 (Intel Xeon E3-1220 v2)

SPECfp_rate_base2006 = 121

CPU2006 license: 9008


Test date: Jul-2013

Test sponsor: ACTION S.A.

Hardware Availability: May-2012

Tested by: ACTION S.A.

Software Availability: Jun-2013

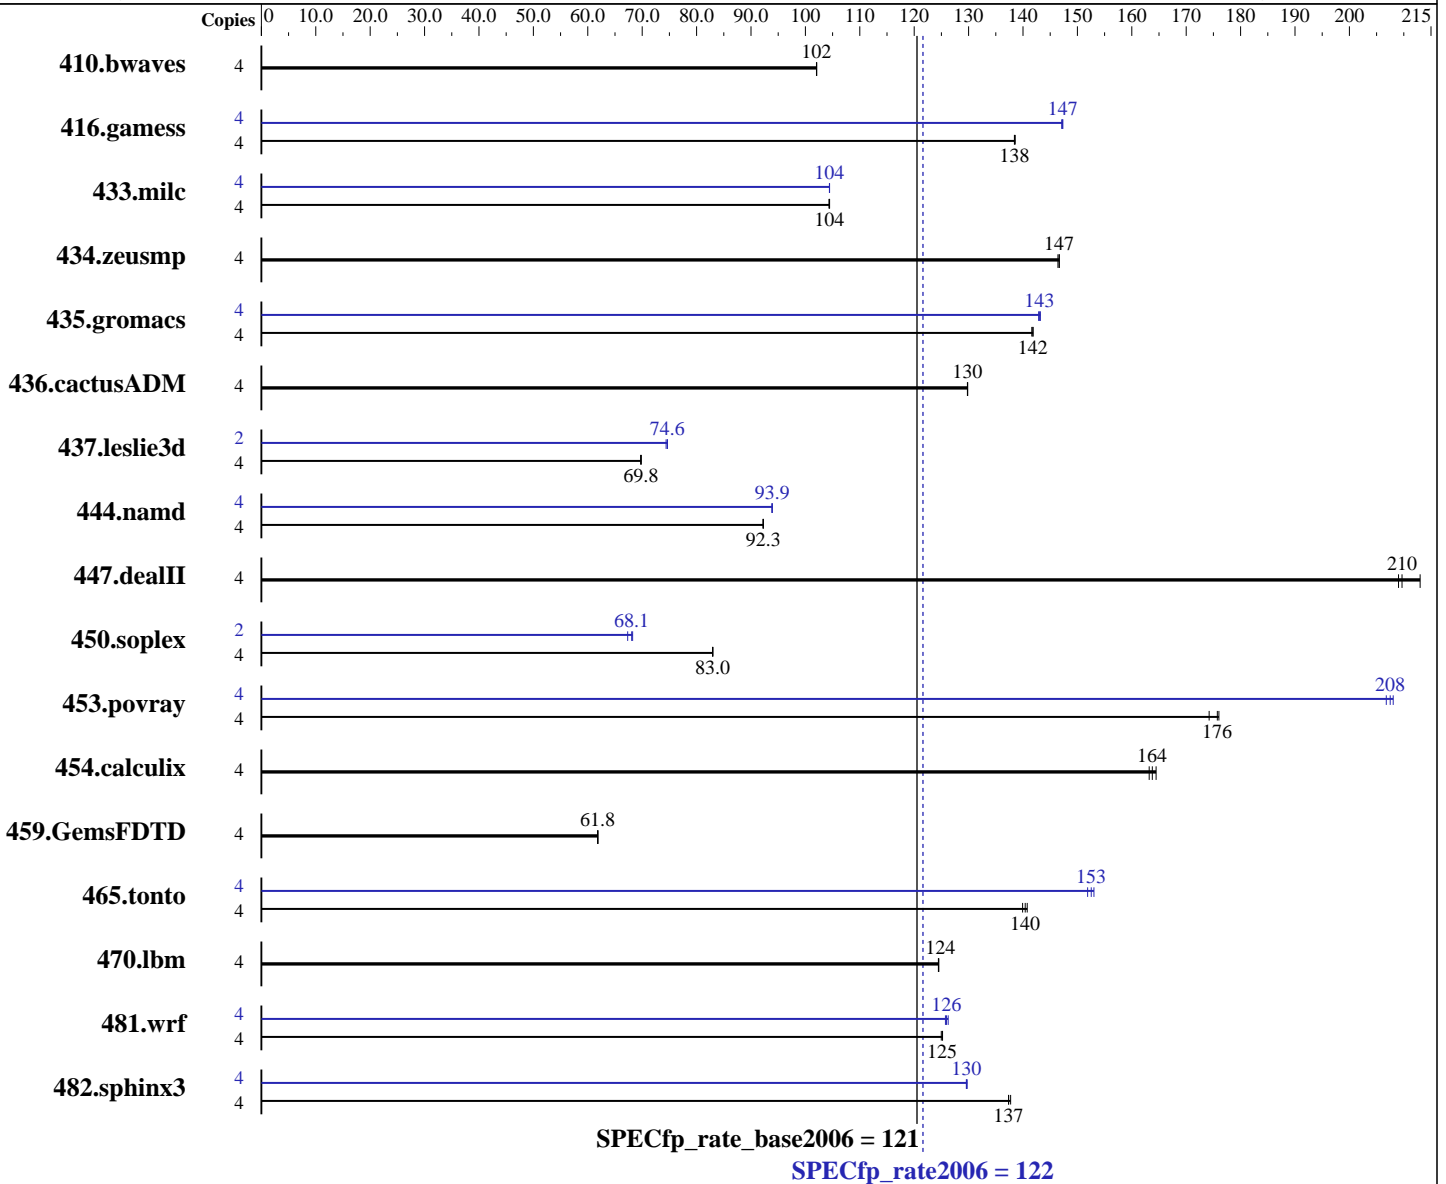

Hardware

CPU Name: Intel Xeon E3-1220 v2
 CPU Characteristics: Intel Turbo Boost Technology up to 3.50 GHz
 CPU MHz: 3100
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)
 2.6.32-358.el6.x86_64
 Compiler: C/C++/Fortran: Version 13.1.1.163 of Intel Compiler XE
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

SPECfp_rate2006 = **122**

ACTINA SOLAR 110 S5 (Intel Xeon E3-1220 v2)

SPECfp_rate_base2006 = **121**

CPU2006 license: 9008

Test date: Jul-2013

Test sponsor: ACTION S.A.

Hardware Availability: May-2012

Tested by: ACTION S.A.

Software Availability: Jun-2013

L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 16 GB (4 x 4 GB 2Rx4 PC3-12800E-11, ECC)
Disk Subsystem: 240 GB OCZ Deneva2 SSD
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	533	102	533	102	533	102	4	533	102	533	102	533	102
416.gamess	4	566	138	565	139	566	138	4	532	147	532	147	532	147
433.milc	4	352	104	352	104	352	104	4	352	104	352	104	352	104
434.zeusmp	4	248	147	248	147	249	146	4	248	147	248	147	249	146
435.gromacs	4	201	142	202	142	201	142	4	200	143	199	143	200	143
436.cactusADM	4	368	130	368	130	368	130	4	368	130	368	130	368	130
437.leslie3d	4	539	69.8	539	69.7	539	69.8	2	252	74.6	252	74.6	253	74.4
444.namd	4	348	92.3	348	92.3	348	92.2	4	342	93.9	342	93.9	342	93.9
447.dealII	4	218	210	219	209	215	213	4	218	210	219	209	215	213
450.soplex	4	402	83.0	402	82.9	402	83.0	2	245	68.1	244	68.2	248	67.3
453.povray	4	121	176	122	174	121	176	4	102	208	103	207	103	208
454.calculix	4	201	164	202	164	202	163	4	201	164	202	164	202	163
459.GemsFDTD	4	687	61.8	686	61.9	686	61.8	4	687	61.8	686	61.9	686	61.8
465.tonto	4	281	140	280	141	280	140	4	257	153	259	152	258	153
470.lbm	4	442	124	441	125	442	124	4	442	124	441	125	442	124
481.wrf	4	357	125	357	125	357	125	4	355	126	354	126	355	126
482.sphinx3	4	568	137	568	137	566	138	4	601	130	602	130	601	130

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Sysinfo program /cpu2006.1.2/config/sysinfo.rev6818
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191
running on localhost.localdomain Tue Jul 9 03:24:26 2013

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

SPECfp_rate2006 = 122

ACTINA SOLAR 110 S5 (Intel Xeon E3-1220 v2)

SPECfp_rate_base2006 = 121

CPU2006 license: 9008

Test date: Jul-2013

Test sponsor: ACTION S.A.

Hardware Availability: May-2012

Tested by: ACTION S.A.

Software Availability: Jun-2013

Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) CPU E3-1220 V2 @ 3.10GHz
 1 "physical id"s (chips)
 4 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores      : 4
siblings       : 4
physical 0:    : cores 0 1 2 3
cache size     : 8192 KB
```

From /proc/meminfo

```
MemTotal:      16304836 kB
HugePages_Total: 0
Hugepagesize:  2048 kB
```

/usr/bin/lsc_release -d

```
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

From /etc/*release* /etc/*version*

```
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

uname -a:

```
Linux localhost.localdomain 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Jul 7 23:43

SPEC is set to: /cpu2006.1.2

```
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/mapper/VolGroup-lv_root
  ext4           197G    36G  152G  20% /
```

Additional information from dmidecode:

```
BIOS American Megatrends Inc. 2.0b 10/04/2012
```

Memory:

```
4x 4 GB
4x 075D MEM1600E34G 4 GB 1600 MHz 1 rank
1x Winbond 25X/Q Series 8 MB
```

(End of data from sysinfo program)



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

SPECfp_rate2006 = 122

ACTINA SOLAR 110 S5 (Intel Xeon E3-1220 v2)

SPECfp_rate_base2006 = 121

CPU2006 license: 9008

Test date: Jul-2013

Test sponsor: ACTION S.A.

Hardware Availability: May-2012

Tested by: ACTION S.A.

Software Availability: Jun-2013

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/cpu2006.1.2/libs/32:/cpu2006.1.2/libs/64:/cpu2006.1.2/sh"

Binaries compiled on a system with 1x E3-1220 V2 CPU + 16GB memory using RHEL6.4
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

SPECfp_rate2006 = 122

ACTINA SOLAR 110 S5 (Intel Xeon E3-1220 v2)

SPECfp_rate_base2006 = 121

CPU2006 license: 9008

Test date: Jul-2013

Test sponsor: ACTION S.A.

Hardware Availability: May-2012

Tested by: ACTION S.A.

Software Availability: Jun-2013

Base Optimization Flags (Continued)

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

SPECfp_rate2006 = 122

ACTINA SOLAR 110 S5 (Intel Xeon E3-1220 v2)

SPECfp_rate_base2006 = 121

CPU2006 license: 9008

Test date: Jul-2013

Test sponsor: ACTION S.A.

Hardware Availability: May-2012

Tested by: ACTION S.A.

Software Availability: Jun-2013

Peak Portability Flags (Continued)

465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -static -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
-unroll2

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -fno-alias -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

SPECfp_rate2006 = 122

ACTINA SOLAR 110 S5 (Intel Xeon E3-1220 v2)

SPECfp_rate_base2006 = 121

CPU2006 license: 9008

Test date: Jul-2013

Test sponsor: ACTION S.A.

Hardware Availability: May-2012

Tested by: ACTION S.A.

Software Availability: Jun-2013

Peak Optimization Flags (Continued)

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -static -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32

The flags file that was used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/ActionSA-ic13.1-official-linux64_1.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/cpu2006/flags/ActionSA-ic13.1-official-linux64_1.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 16:35:01 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 30 July 2013.