



SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 220 X6 (Intel Xeon E5-2650 v4, 2.20 GHz)

SPECint®_rate2006 = 1030

SPECint_rate_base2006 = 986

CPU2006 license: 9008


Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Sep-2016

Hardware Availability: Mar-2016

Software Availability: Mar-2016

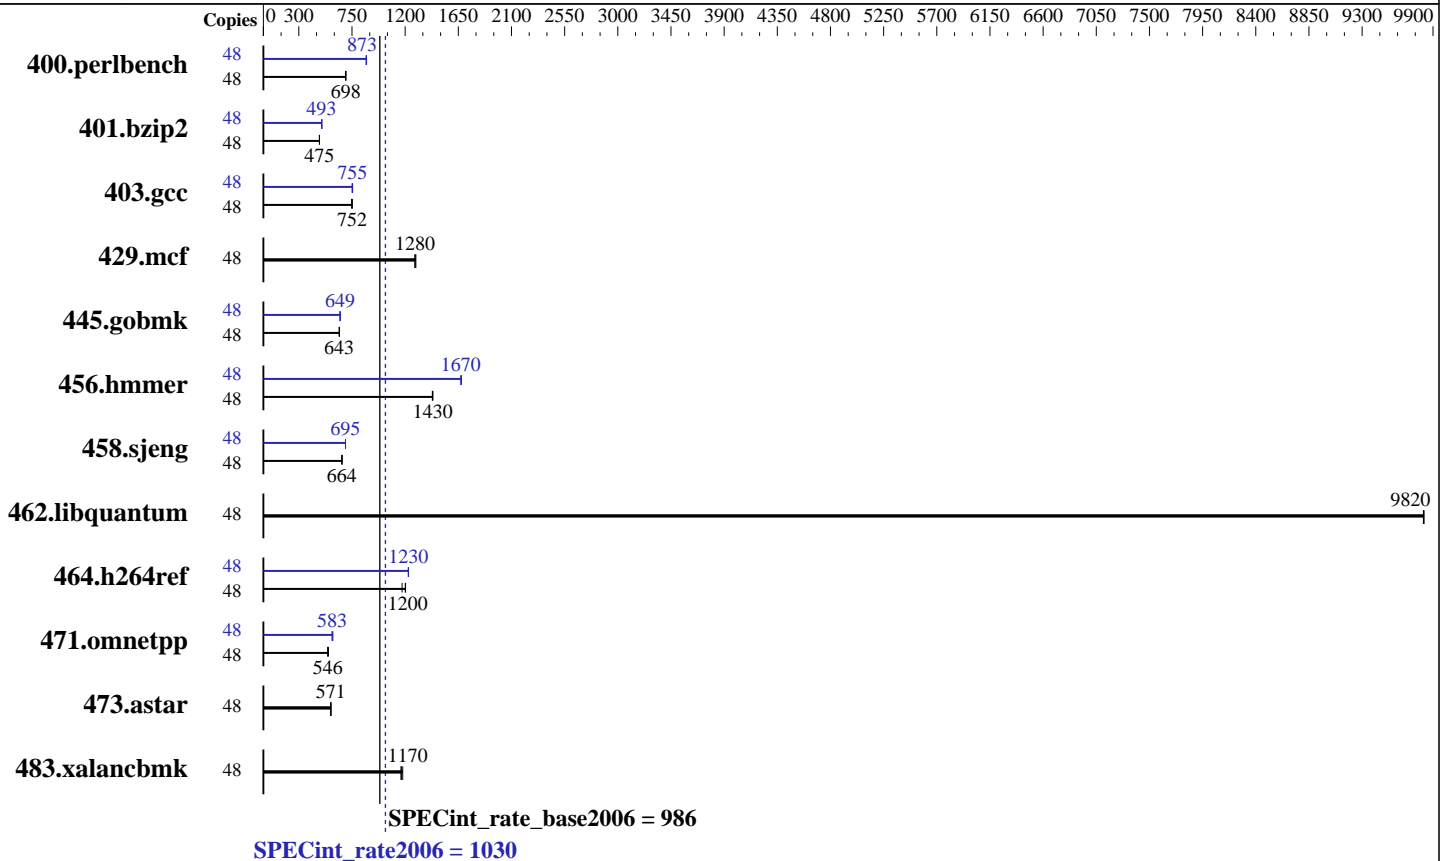

Hardware

CPU Name: Intel Xeon E5-2650 v4
 CPU Characteristics: Intel Turbo Boost Technology up to 2.90 GHz
 CPU MHz: 2200
 FPU: Integrated
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 30 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2400T-R)
 Disk Subsystem: 1 x 240 GB SATA II SSD
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 7.2 (Maipo)
 3.10.0-327.18.2.el7.x86_64
 Compiler: C/C++: Version 16.0.3.210 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 220 X6 (Intel Xeon E5-2650 v4, 2.20 GHz)

SPECint_rate2006 = 1030

SPECint_rate_base2006 = 986

CPU2006 license: 9008
Test sponsor: ACTION S.A.
Tested by: ACTION S.A.

Test date: Sep-2016
Hardware Availability: Mar-2016
Software Availability: Mar-2016

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	48	671	699	672	698	674	696	48	537	873	537	873	540	869
401.bzip2	48	975	475	978	474	975	475	48	934	496	939	493	941	492
403.gcc	48	517	747	514	752	514	752	48	515	750	512	755	512	755
429.mcf	48	339	1290	341	1280	341	1280	48	339	1290	341	1280	341	1280
445.gobmk	48	783	643	783	643	784	643	48	776	649	774	650	776	649
456.hammer	48	313	1430	313	1430	312	1430	48	268	1670	268	1670	267	1680
458.sjeng	48	871	667	874	664	874	664	48	836	695	835	695	836	695
462.libquantum	48	101	9820	101	9820	101	9820	48	101	9820	101	9820	101	9820
464.h264ref	48	905	1170	883	1200	884	1200	48	865	1230	866	1230	865	1230
471.omnetpp	48	550	546	551	545	545	551	48	515	582	510	588	515	583
473.astar	48	590	571	592	569	588	573	48	590	571	592	569	588	573
483.xalancbmk	48	284	1170	281	1180	284	1170	48	284	1170	281	1180	284	1170

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Bios Settings:

Intel(R) Hyper-Threading Tech = Enabled
Power & Performance = Performance
Enforce POR = Disabled
Memory Operating Speed Selection = Auto
Cluster-on-Die = Enabled
Set FAN Profile = Performance
Fan PWM Offset = 0

Sysinfo program /cpu2006.1.2/config/sysinfo.rev6818
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191
running on SUT Thu Sep 15 10:23:25 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ACTION S.A.

SPECint_rate2006 = 1030

ACTINA SOLAR 220 X6 (Intel Xeon E5-2650 v4, 2.20 GHz)

SPECint_rate_base2006 = 986

CPU2006 license: 9008

Test date: Sep-2016

Test sponsor: ACTION S.A.

Hardware Availability: Mar-2016

Tested by: ACTION S.A.

Software Availability: Mar-2016

Platform Notes (Continued)

```

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2650 v4 @ 2.20GHz
 2 "physical id"s (chips)
 48 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 12
  siblings  : 24
  physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
  physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
cache size : 15360 KB

```

```

From /proc/meminfo
MemTotal:      263857684 kB
HugePages_Total:      1
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.2 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.2"
PRETTY_NAME="Red Hat Enterprise Linux"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"
os-release.rpmsave:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.0 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.0"
PRETTY_NAME="Red Hat Enterprise Linux"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server

```

```

uname -a:
Linux SUT 3.10.0-327.18.2.el7.x86_64 #2 SMP Wed Jun 1 17:37:13 CEST 2016
x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Sep 13 14:20

```

SPEC is set to: /cpu2006.1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdal       ext4  212G  118G   84G  59% /

```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ACTION S.A.

SPECint_rate2006 = 1030

ACTINA SOLAR 220 X6 (Intel Xeon E5-2650 v4, 2.20 GHz)

SPECint_rate_base2006 = 986

CPU2006 license: 9008

Test date: Sep-2016

Test sponsor: ACTION S.A.

Hardware Availability: Mar-2016

Tested by: ACTION S.A.

Software Availability: Mar-2016

Platform Notes (Continued)

Additional information from dmidecode:

BIOS Intel Corporation SE5C610.86B.11.01.0136.062220161656 06/22/2016

Memory:

16x 16 GB

16x Hynix HMA42GR7AFR4N-UH 16 GB 2400 MHz 2 rank

8x NO DIMM NO DIMM

(End of data from sysinfo program)

dmidecode does not properly detect memory modules

16 modules of 16 GB were used to run the test (256 GB total)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/cpu2006.1.2/libs/32:/cpu2006.1.2/libs/64:/cpu2006.1.2/sh"

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Binaries compiled on a system with 2x Xeon E5-2650 v4 chips + 256 GB memory using RedHat EL 7.2

Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/lib/ia32_lin

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/lib/ia32_lin

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

-opt-mem-layout-trans=3

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 220 X6 (Intel Xeon E5-2650 v4, 2.20 GHz)

SPECint_rate2006 = 1030

SPECint_rate_base2006 = 986

CPU2006 license: 9008

Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Sep-2016

Hardware Availability: Mar-2016

Software Availability: Mar-2016

Base Optimization Flags (Continued)

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/cpu2006.1.2/sh -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/lib/ia32_lin

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/lib/ia32_lin

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

401.bzip2: -DSPEC_CPU_LP64

456.hmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ACTION S.A.

SPECint_rate2006 = 1030

ACTINA SOLAR 220 X6 (Intel Xeon E5-2650 v4, 2.20 GHz)

SPECint_rate_base2006 = 986

CPU2006 license: 9008

Test date: Sep-2016

Test sponsor: ACTION S.A.

Hardware Availability: Mar-2016

Tested by: ACTION S.A.

Software Availability: Mar-2016

Peak Optimization Flags (Continued)

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/cpu2006.1.2/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevB-aug-2015-For-Intel-Platform.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevB-aug-2015-For-Intel-Platform.xml>



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 220 X6 (Intel Xeon E5-2650 v4, 2.20 GHz)

SPECint_rate2006 = 1030

SPECint_rate_base2006 = 986

CPU2006 license: 9008

Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Sep-2016

Hardware Availability: Mar-2016

Software Availability: Mar-2016

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Oct 4 14:49:36 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 4 October 2016.