



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp[®]_rate2006 = 70.9

PRIMERGY RX200 S5, Intel Xeon E5502, 1.86 GHz

SPECfp_rate_base2006 = 68.2

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu Siemens Computers

Test date: Mar-2009

Hardware Availability: Apr-2009

Software Availability: Feb-2009

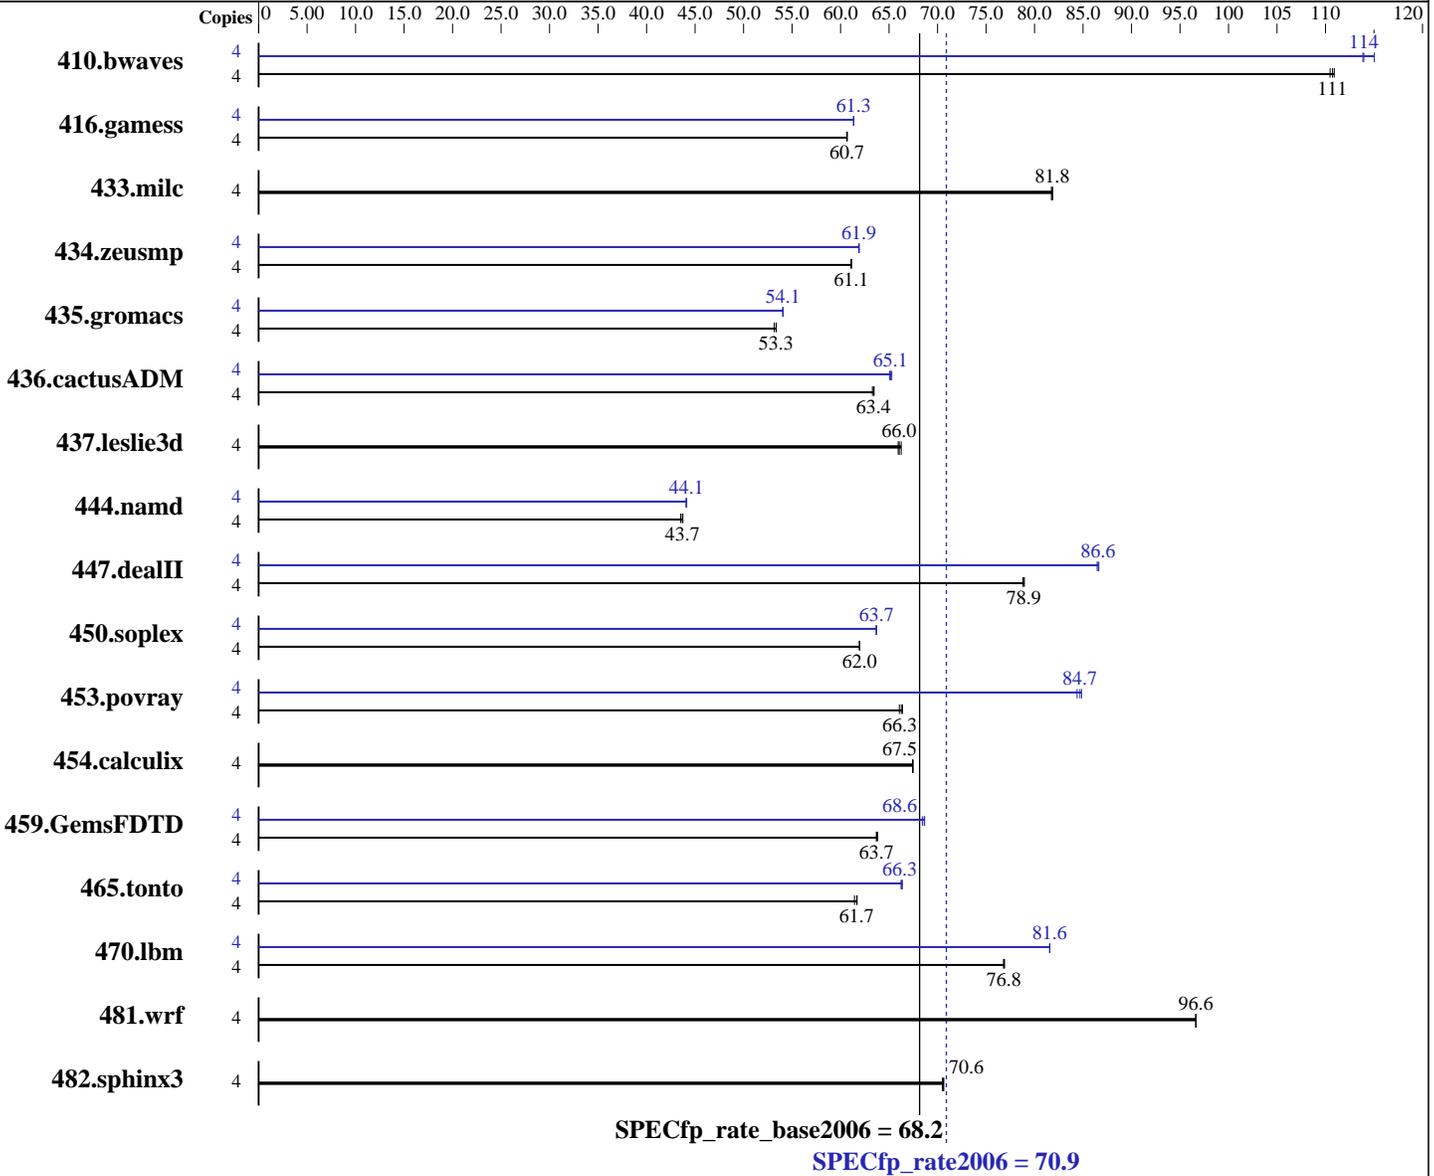

Hardware

CPU Name: Intel Xeon E5502
 CPU Characteristics:
 CPU MHz: 1867
 FPU: Integrated
 CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
 Compiler: Intel C++ and Fortran Compiler 11.0 for Linux Build 20090131 Package ID: l_cproc_p_11.0.080, l_cprof_p_11.0.080
 Auto Parallel: No
 File System: ext3
 System State: Multi-User Run Level 3
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 70.9

PRIMERGY RX200 S5, Intel Xeon E5502, 1.86 GHz

SPECfp_rate_base2006 = 68.2

CPU2006 license: 19

Test date: Mar-2009

Test sponsor: Fujitsu

Hardware Availability: Apr-2009

Tested by: Fujitsu Siemens Computers

Software Availability: Feb-2009

L3 Cache: 4 MB I+D on chip per chip
Other Cache: None
Memory: 48 GB (12x4 GB PC3-10600R, 2 rank, CL9-9-9, ECC)
Disk Subsystem: 1 x SAS, 73 GB, 10000 RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	491	111	492	110	490	111	4	477	114	477	114	473	115
416.gamess	4	1291	60.6	1291	60.7	1291	60.7	4	1277	61.3	1277	61.3	1276	61.4
433.milc	4	449	81.7	449	81.9	449	81.8	4	449	81.7	449	81.9	449	81.8
434.zeusmp	4	596	61.1	596	61.1	596	61.1	4	588	61.9	588	61.9	588	61.9
435.gromacs	4	535	53.3	537	53.2	535	53.4	4	528	54.1	529	54.0	528	54.1
436.cactusADM	4	753	63.5	754	63.4	755	63.3	4	732	65.3	735	65.1	734	65.1
437.leslie3d	4	570	65.9	569	66.0	568	66.3	4	570	65.9	569	66.0	568	66.3
444.namd	4	737	43.5	733	43.7	734	43.7	4	727	44.1	728	44.1	727	44.1
447.dealII	4	580	79.0	581	78.8	580	78.9	4	529	86.6	528	86.6	529	86.5
450.soplex	4	538	62.0	539	61.9	538	62.0	4	524	63.7	524	63.7	524	63.7
453.povray	4	321	66.4	321	66.3	322	66.1	4	251	84.7	251	84.8	252	84.4
454.calculix	4	489	67.5	489	67.5	489	67.4	4	489	67.5	489	67.5	489	67.4
459.GemsFDTD	4	666	63.7	666	63.7	665	63.8	4	618	68.7	620	68.4	618	68.6
465.tonto	4	638	61.7	638	61.7	641	61.4	4	593	66.4	594	66.2	594	66.3
470.lbm	4	715	76.9	716	76.8	715	76.8	4	674	81.6	674	81.6	674	81.5
481.wrf	4	462	96.6	462	96.6	462	96.6	4	462	96.6	462	96.6	462	96.6
482.sphinx3	4	1106	70.5	1104	70.6	1104	70.6	4	1106	70.5	1104	70.6	1104	70.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

General Notes

For information about Fujitsu please visit: <http://www.fujitsu.com>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 70.9

PRIMERGY RX200 S5, Intel Xeon E5502, 1.86 GHz

SPECfp_rate_base2006 = 68.2

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu Siemens Computers

Test date: Mar-2009

Hardware Availability: Apr-2009

Software Availability: Feb-2009

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.lelie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 70.9

PRIMERGY RX200 S5, Intel Xeon E5502, 1.86 GHz

SPECfp_rate_base2006 = 68.2

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu Siemens Computers

Test date: Mar-2009

Hardware Availability: Apr-2009

Software Availability: Feb-2009

Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks (except as noted below):

icpc

450.soplex: icpc -m32

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
-auto-ilp32

482.sphinx3: basepeak = yes

C++ benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 70.9

PRIMERGY RX200 S5, Intel Xeon E5502, 1.86 GHz

SPECfp_rate_base2006 = 68.2

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu Siemens Computers

Test date: Mar-2009

Hardware Availability: Apr-2009

Software Availability: Feb-2009

Peak Optimization Flags (Continued)

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias -scalar-rep-

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -opt-prefetch

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -opt-prefetch -auto-ilp32

454.calculix: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 70.9

PRIMERGY RX200 S5, Intel Xeon E5502, 1.86 GHz

SPECfp_rate_base2006 = 68.2

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu Siemens Computers

Test date: Mar-2009

Hardware Availability: Apr-2009

Software Availability: Feb-2009

Peak Optimization Flags (Continued)

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090710.04.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090710.04.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 23:18:03 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 31 March 2009.