



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp[®]2006 = 23.2

PRIMERGY RX300 S5, Intel Xeon E5502, 1.86 GHz

SPECfp_base2006 = 21.9

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Sep-2009

Hardware Availability: Apr-2009

Software Availability: Feb-2009

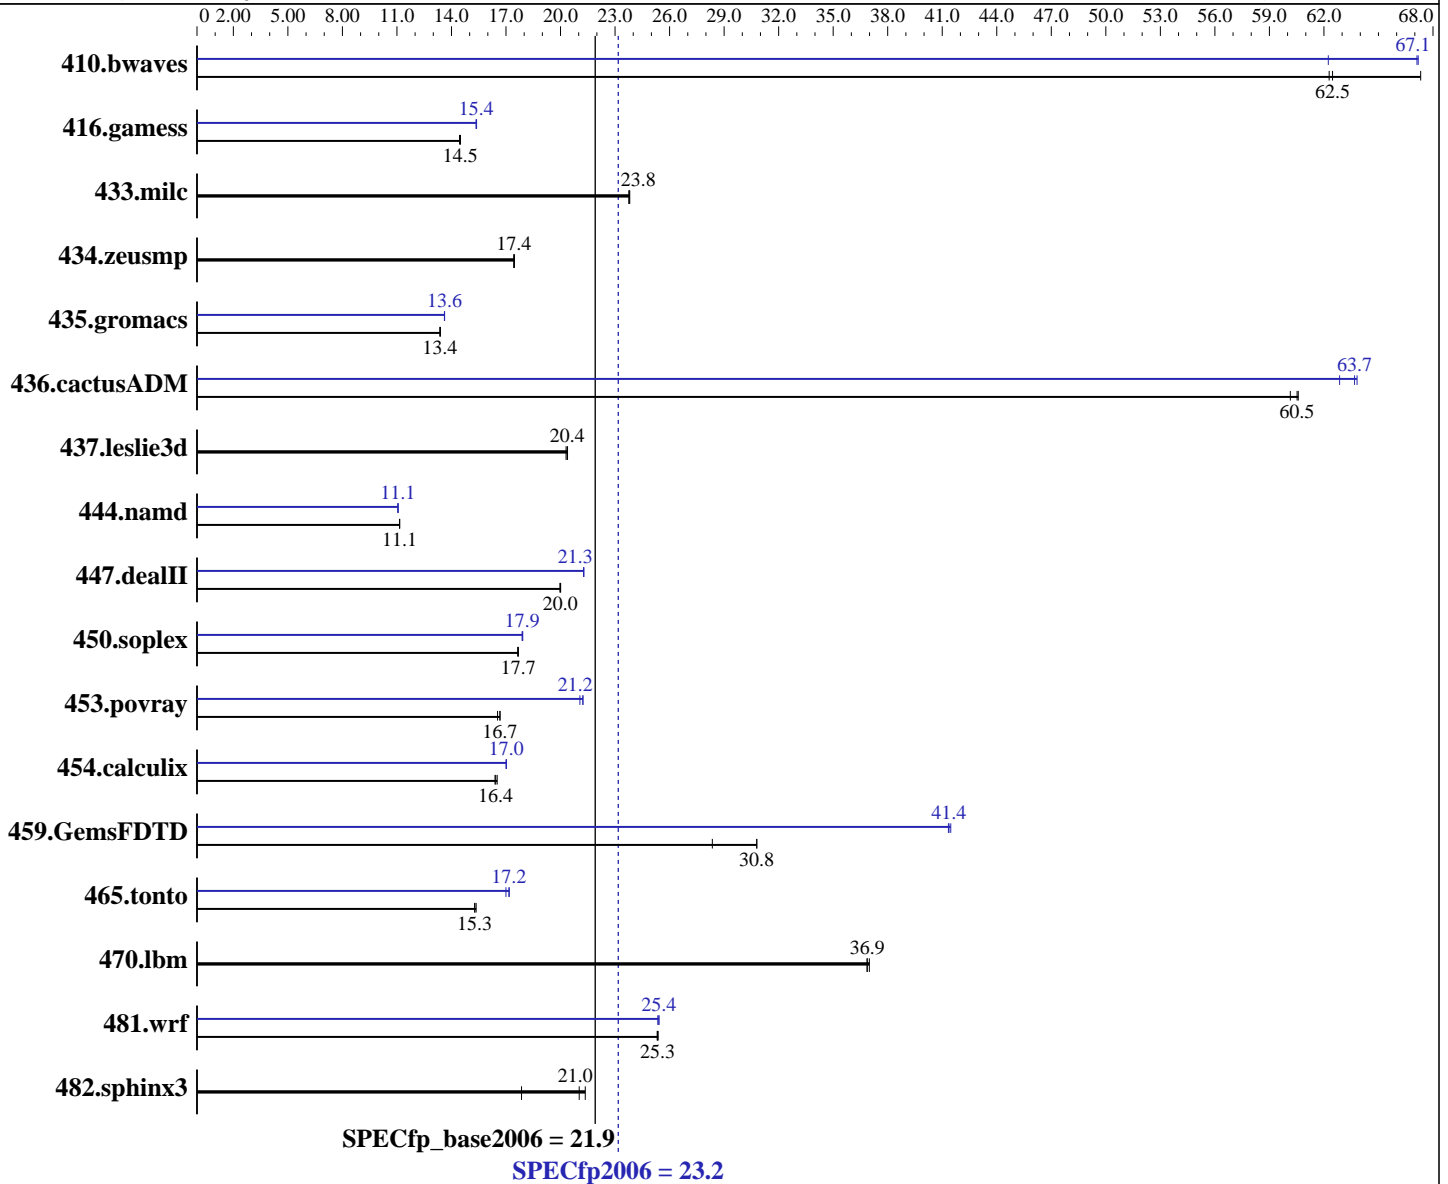

Hardware

CPU Name: Intel Xeon E5502
 CPU Characteristics:
 CPU MHz: 1867
 FPU: Integrated
 CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
 Compiler: Intel C++ and Fortran Compiler 11.0 for Linux Build 20090131 Package ID: l_cproc_p_11.0.080, l_cprof_p_11.0.080
 Auto Parallel: Yes
 File System: ext3
 System State: Multi-User Run Level 3
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp2006 = **23.2**

PRIMERGY RX300 S5, Intel Xeon E5502, 1.86 GHz

SPECfp_base2006 = **21.9**

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Sep-2009

Hardware Availability: Apr-2009

Software Availability: Feb-2009

L3 Cache: 4 MB I+D on chip per chip
Other Cache: None
Memory: 72 GB (18x4 GB PC3-10600R, 2 rank, CL9-9-9, ECC, see add'l detail in notes)
Disk Subsystem: 1 x SATA, 250 GB, 7200 RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	202	67.3	218	62.5	218	62.3	202	67.2	202	67.1	218	62.2
416.gamess	1351	14.5	1352	14.5	1356	14.4	1273	15.4	1274	15.4	1275	15.4
433.milc	386	23.8	386	23.8	386	23.8	386	23.8	386	23.8	386	23.8
434.zeusmp	522	17.4	522	17.4	521	17.5	522	17.4	522	17.4	521	17.5
435.gromacs	533	13.4	534	13.4	534	13.4	525	13.6	524	13.6	524	13.6
436.cactusADM	197	60.6	197	60.5	199	60.2	188	63.7	190	62.9	187	63.8
437.leslie3d	462	20.4	461	20.4	463	20.3	462	20.4	461	20.4	463	20.3
444.namd	720	11.1	719	11.1	719	11.2	725	11.1	725	11.1	725	11.1
447.dealII	573	20.0	573	20.0	572	20.0	538	21.3	538	21.3	538	21.3
450.soplex	472	17.7	473	17.6	472	17.7	466	17.9	465	17.9	466	17.9
453.povray	319	16.7	319	16.7	322	16.5	251	21.2	253	21.1	251	21.2
454.calculix	500	16.5	503	16.4	502	16.4	485	17.0	485	17.0	485	17.0
459.GemsFDTD	374	28.4	345	30.8	345	30.8	257	41.3	256	41.5	256	41.4
465.tonto	641	15.4	644	15.3	644	15.3	573	17.2	573	17.2	579	17.0
470.lbm	373	36.9	373	36.9	371	37.0	373	36.9	373	36.9	371	37.0
481.wrf	440	25.4	441	25.3	441	25.3	441	25.4	440	25.4	439	25.4
482.sphinx3	1092	17.9	927	21.0	912	21.4	1092	17.9	927	21.0	912	21.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

Platform Notes

The system automatically configures the memory to run at 800 MHz.

General Notes

OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to granularity=fine,scatter
KMP_STACKSIZE set to 200M
This result was measured on the PRIMERGY TX300 S5. The PRIMERGY TX300 S5 and the PRIMERGY RX300 S5 are electronically equivalent.

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp2006 = 23.2

PRIMERGY RX300 S5, Intel Xeon E5502, 1.86 GHz

SPECfp_base2006 = 21.9

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Sep-2009
Hardware Availability: Apr-2009
Software Availability: Feb-2009

General Notes (Continued)

For information about Fujitsu please visit: <http://www.fujitsu.com>

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp2006 = 23.2

PRIMERGY RX300 S5, Intel Xeon E5502, 1.86 GHz

SPECfp_base2006 = 21.9

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Sep-2009

Hardware Availability: Apr-2009

Software Availability: Feb-2009

Base Optimization Flags (Continued)

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks (except as noted below):

icpc

450.soplex: icpc -m32

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp2006 = 23.2

PRIMERGY RX300 S5, Intel Xeon E5502, 1.86 GHz

SPECfp_base2006 = 21.9

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Sep-2009
Hardware Availability: Apr-2009
Software Availability: Feb-2009

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias -scalar-rep- -opt-prefetch

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
-parallel

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -opt-prefetch -parallel

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -auto

Benchmarks using both Fortran and C:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp2006 = 23.2

PRIMERGY RX300 S5, Intel Xeon E5502, 1.86 GHz

SPECfp_base2006 = 21.9

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Sep-2009

Hardware Availability: Apr-2009

Software Availability: Feb-2009

Peak Optimization Flags (Continued)

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -opt-prefetch -parallel -auto-ilp32

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
-parallel -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20091013.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20091013.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 04:34:18 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 13 October 2009.