



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

SPECint®\_rate2006 = 142

IBM System x iDataPlex dx360 M2 (Intel Xeon E5506)

SPECint\_rate\_base2006 = 133

CPU2006 license: 11


Test date: Jul-2009

Test sponsor: IBM Corporation

Hardware Availability: Aug-2009

Tested by: IBM Corporation

Software Availability: Feb-2009

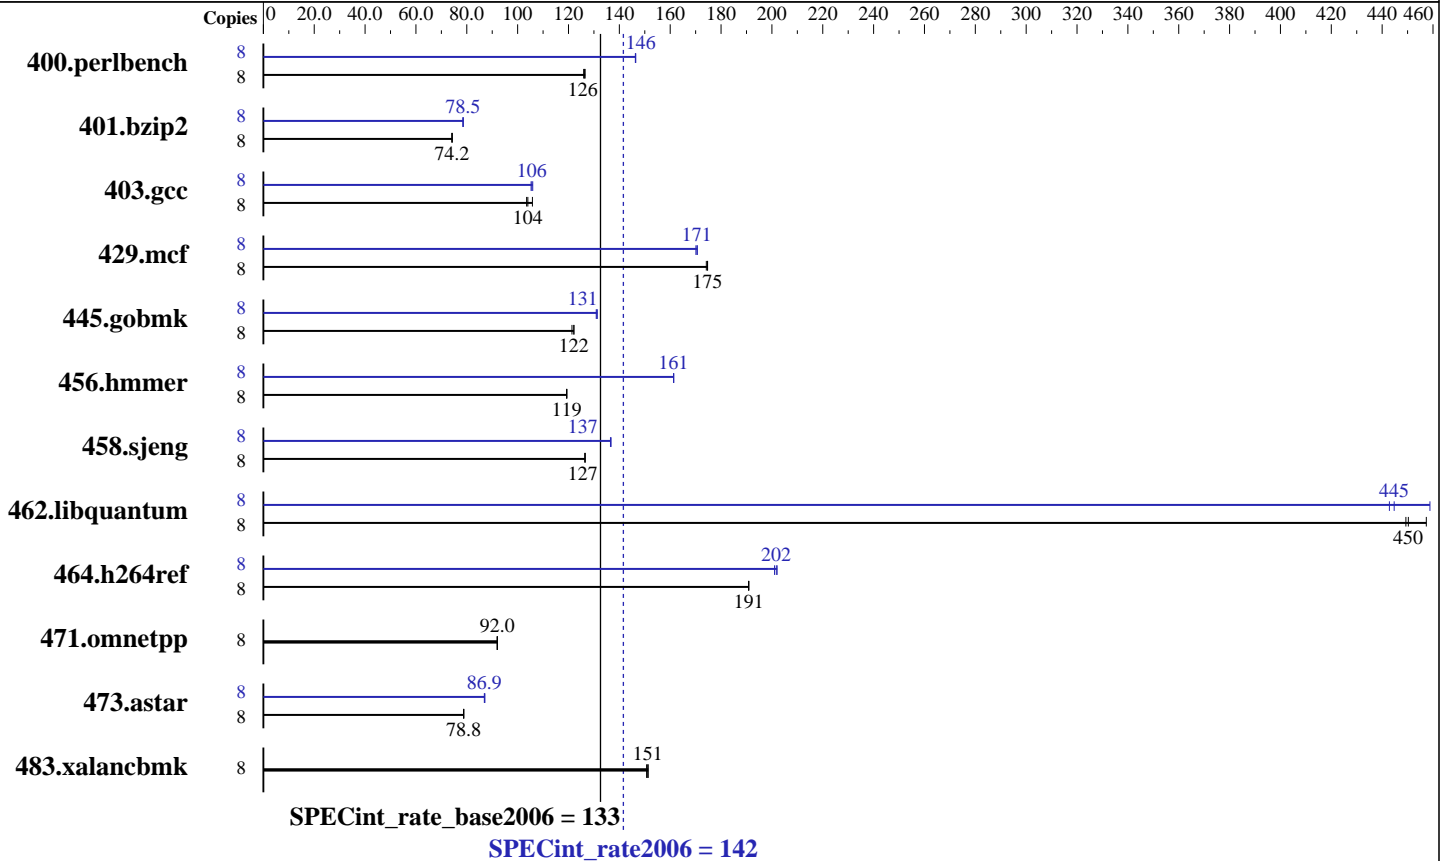

### Hardware

CPU Name: Intel Xeon E5506  
 CPU Characteristics:  
 CPU MHz: 2133  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 4 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 24 GB (12 x 2 GB PC3-10600R, 2 Rank, running at 800 MHz)  
 Disk Subsystem: 1 x 250 GB SATA, 7200RPM  
 Other Hardware: None

### Software

Operating System: SuSE Linux Enterprise Server 10 (x86\_64) SP2 with patch Linux kernel 20090119, Kernel 2.6.16.60-0.34-smp  
 Compiler: Intel C++ Compiler Professional 11.0 for Linux Build 20090131 Package ID: l\_cproc\_p\_11.0.080  
 Auto Parallel: No  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1  
 Binutils 2.18.50.0.7.20080502



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = 142

IBM System x iDataPlex dx360 M2 (Intel Xeon E5506)

SPECint\_rate\_base2006 = 133

CPU2006 license: 11

Test date: Jul-2009

Test sponsor: IBM Corporation

Hardware Availability: Aug-2009

Tested by: IBM Corporation

Software Availability: Feb-2009

## Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	620	126	<b>619</b>	<b>126</b>	618	127	8	534	146	534	146	<b>534</b>	<b>146</b>
401.bzip2	8	1039	74.3	<b>1041</b>	<b>74.2</b>	1041	74.1	8	983	78.5	982	78.6	<b>983</b>	<b>78.5</b>
403.gcc	8	622	104	<b>619</b>	<b>104</b>	609	106	8	<b>610</b>	<b>106</b>	612	105	608	106
429.mcf	8	419	174	418	175	<b>418</b>	<b>175</b>	8	<b>428</b>	<b>171</b>	429	170	427	171
445.gobmk	8	687	122	<b>687</b>	<b>122</b>	691	121	8	<b>640</b>	<b>131</b>	639	131	641	131
456.hammer	8	<b>626</b>	<b>119</b>	625	119	626	119	8	463	161	463	161	<b>463</b>	<b>161</b>
458.sjeng	8	<b>765</b>	<b>127</b>	766	126	765	127	8	<b>708</b>	<b>137</b>	708	137	709	137
462.libquantum	8	369	449	<b>368</b>	<b>450</b>	362	457	8	361	459	<b>373</b>	<b>445</b>	374	443
464.h264ref	8	<b>928</b>	<b>191</b>	927	191	928	191	8	881	201	876	202	<b>878</b>	<b>202</b>
471.omnetpp	8	<b>544</b>	<b>92.0</b>	544	92.0	543	92.1	8	<b>544</b>	<b>92.0</b>	544	92.0	543	92.1
473.astar	8	713	78.7	712	78.8	<b>713</b>	<b>78.8</b>	8	646	86.9	645	87.1	<b>646</b>	<b>86.9</b>
483.xalancbmk	8	366	151	<b>365</b>	<b>151</b>	365	151	8	366	151	<b>365</b>	<b>151</b>	365	151

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## General Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = 142

IBM System x iDataPlex dx360 M2 (Intel Xeon E5506)

SPECint\_rate\_base2006 = 133

CPU2006 license: 11

Test date: Jul-2009

Test sponsor: IBM Corporation

Hardware Availability: Aug-2009

Tested by: IBM Corporation

Software Availability: Feb-2009

## Base Optimization Flags

C benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc  
-opt-malloc-options=3 -opt-prefetch
```

C++ benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/spec/cpu2006.1.1/lib -lsmartheap
```

## Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc
```

```
401.bzip2: /opt/intel/Compiler/11.0/080/bin/intel64/icc
```

```
456.hmmer: /opt/intel/Compiler/11.0/080/bin/intel64/icc
```

```
458.sjeng: /opt/intel/Compiler/11.0/080/bin/intel64/icc
```

C++ benchmarks (except as noted below):

```
icpc
```

```
473.astar: /opt/intel/Compiler/11.0/080/bin/intel64/icpc
```

## Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_IA32
```

```
401.bzip2: -DSPEC_CPU_LP64
```

```
456.hmmer: -DSPEC_CPU_LP64
```

```
458.sjeng: -DSPEC_CPU_LP64
```

```
462.libquantum: -DSPEC_CPU_LINUX
```

```
473.astar: -DSPEC_CPU_LP64
```

```
483.xalancbmk: -DSPEC_CPU_LINUX
```



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = 142

IBM System x iDataPlex dx360 M2 (Intel Xeon E5506)

SPECint\_rate\_base2006 = 133

CPU2006 license: 11

Test date: Jul-2009

Test sponsor: IBM Corporation

Hardware Availability: Aug-2009

Tested by: IBM Corporation

Software Availability: Feb-2009

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
 -prof-use(pass 2) -ansi-alias -opt-prefetch

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
 -prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc  
 -opt-malloc-options=3

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
 -prof-use(pass 2) -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2  
 -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2  
 -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
 -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static  
 -opt-malloc-options=3 -opt-prefetch

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
 -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -ansi-alias -opt-ra-region-strategy=routine -auto-ilp32  
 -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmarheap64

483.xalancbmk: basepeak = yes



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = 142

IBM System x iDataPlex dx360 M2 (Intel Xeon E5506)

SPECint\_rate\_base2006 = 133

CPU2006 license: 11

Test date: Jul-2009

Test sponsor: IBM Corporation

Hardware Availability: Aug-2009

Tested by: IBM Corporation

Software Availability: Feb-2009

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20091028.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20091028.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 04:13:23 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 28 October 2009.