



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint®2006 = 31.9

IBM System x3250 M3 (Intel Xeon X3450)

SPECint_base2006 = 27.8

CPU2006 license: 11


Test date: Oct-2009

Test sponsor: IBM Corporation

Hardware Availability: Oct-2009

Tested by: IBM Corporation

Software Availability: Mar-2009

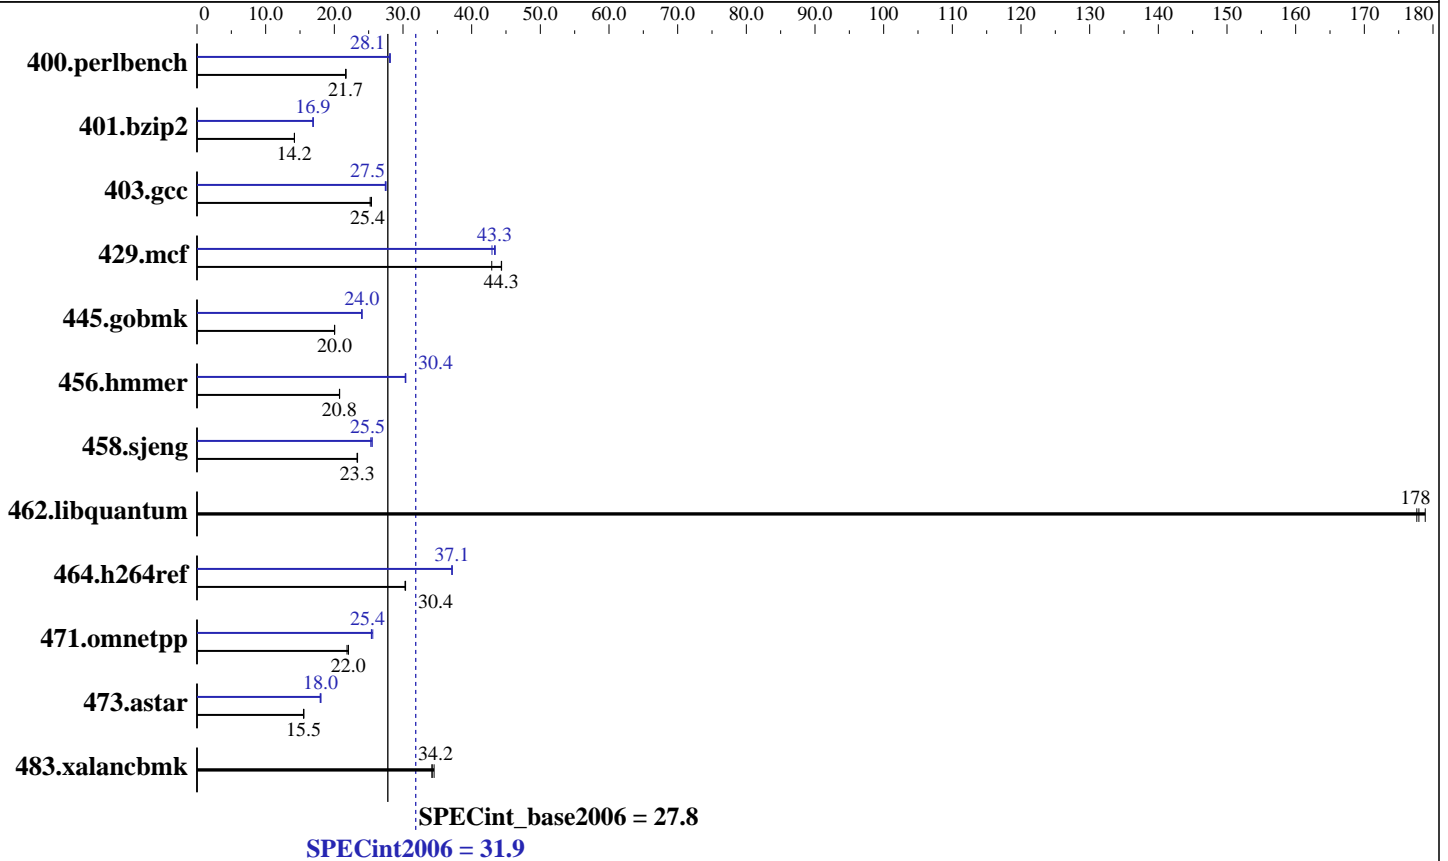

Hardware

CPU Name: Intel Xeon X3450
 CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz
 CPU MHz: 2667
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 16 GB (4 x 4 GB PC3-10600R)
 Disk Subsystem: 1 x 73 GB SAS, 15000RPM
 Other Hardware: None

Software

Operating System: SuSE Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-default
 Compiler: Intel C++ Compiler Professional 11.0 for Linux Build 20090131 Package ID: l_cproc_p_11.0.080
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1
 Binutils 2.18.50.0.7.20080502



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 31.9

IBM System x3250 M3 (Intel Xeon X3450)

SPECint_base2006 = 27.8

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Oct-2009

Hardware Availability: Oct-2009

Software Availability: Mar-2009

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	<u>451</u>	<u>21.7</u>	451	21.6	450	21.7	<u>347</u>	<u>28.1</u>	347	28.1	348	28.1
401.bzip2	<u>680</u>	<u>14.2</u>	680	14.2	680	14.2	571	16.9	<u>571</u>	<u>16.9</u>	570	16.9
403.gcc	<u>317</u>	<u>25.4</u>	319	25.2	317	25.4	293	27.5	294	27.4	<u>293</u>	<u>27.5</u>
429.mcf	212	42.9	<u>206</u>	<u>44.3</u>	206	44.4	210	43.4	<u>210</u>	<u>43.3</u>	212	43.0
445.gobmk	523	20.0	<u>523</u>	<u>20.0</u>	524	20.0	437	24.0	<u>437</u>	<u>24.0</u>	437	24.0
456.hammer	449	20.8	450	20.7	<u>450</u>	<u>20.8</u>	<u>307</u>	<u>30.4</u>	307	30.4	308	30.3
458.sjeng	517	23.4	519	23.3	<u>518</u>	<u>23.3</u>	478	25.3	<u>475</u>	<u>25.5</u>	475	25.5
462.libquantum	<u>116</u>	<u>178</u>	117	178	116	179	<u>116</u>	<u>178</u>	117	178	116	179
464.h264ref	729	30.4	<u>729</u>	<u>30.4</u>	731	30.3	<u>596</u>	<u>37.1</u>	596	37.2	596	37.1
471.omnetpp	<u>284</u>	<u>22.0</u>	283	22.1	286	21.8	<u>246</u>	<u>25.4</u>	244	25.6	246	25.4
473.astar	451	15.6	453	15.5	<u>452</u>	<u>15.5</u>	389	18.0	<u>390</u>	<u>18.0</u>	391	17.9
483.xalancbmk	200	34.5	<u>202</u>	<u>34.2</u>	202	34.2	200	34.5	<u>202</u>	<u>34.2</u>	202	34.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run
CPU C-States Enable and Adjacent Sector Prefetch Enable
Turbo Mode Enable
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to granularity=fine,scatter

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 31.9

IBM System x3250 M3 (Intel Xeon X3450)

SPECint_base2006 = 27.8

CPU2006 license: 11

Test date: Oct-2009

Test sponsor: IBM Corporation

Hardware Availability: Oct-2009

Tested by: IBM Corporation

Software Availability: Mar-2009

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel
-par-runtime-control -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/spec/cpu2006.1.1/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/Compiler/11.0/080/bin/intel64/icc

456.hmmer: /opt/intel/Compiler/11.0/080/bin/intel64/icc

458.sjeng: /opt/intel/Compiler/11.0/080/bin/intel64/icc

C++ benchmarks (except as noted below):

icpc

473.astar: /opt/intel/Compiler/11.0/080/bin/intel64/icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

401.bzip2: -DSPEC_CPU_LP64

456.hmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LINUX

473.astar: -DSPEC_CPU_LP64

483.xalancbmk: -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 31.9

IBM System x3250 M3 (Intel Xeon X3450)

SPECint_base2006 = 27.8

CPU2006 license: 11

Test date: Oct-2009

Test sponsor: IBM Corporation

Hardware Availability: Oct-2009

Tested by: IBM Corporation

Software Availability: Mar-2009

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -ansi-alias -opt-prefetch

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -auto-ilp32 -opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-alloc
 -opt-malloc-options=3

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
 -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
 -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
 -L/spec/cpu2006.1.1/lib -lsmartheap

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -ansi-alias -opt-ra-region-strategy=routine -auto-ilp32
 -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap64

483.xalancbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 31.9

IBM System x3250 M3 (Intel Xeon X3450)

SPECint_base2006 = 27.8

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Oct-2009

Hardware Availability: Oct-2009

Software Availability: Mar-2009

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20091028.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20091028.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 05:01:00 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 23 November 2009.