



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

SPECint®_rate2006 = 135

ACTINA SOLAR 212 X3 (Intel Xeon E5504)

SPECint_rate_base2006 = 127

CPU2006 license: 9008


Test date: Nov-2009

Test sponsor: ACTION S.A.

Hardware Availability: Apr-2009

Tested by: ACTION S.A.

Software Availability: Feb-2009

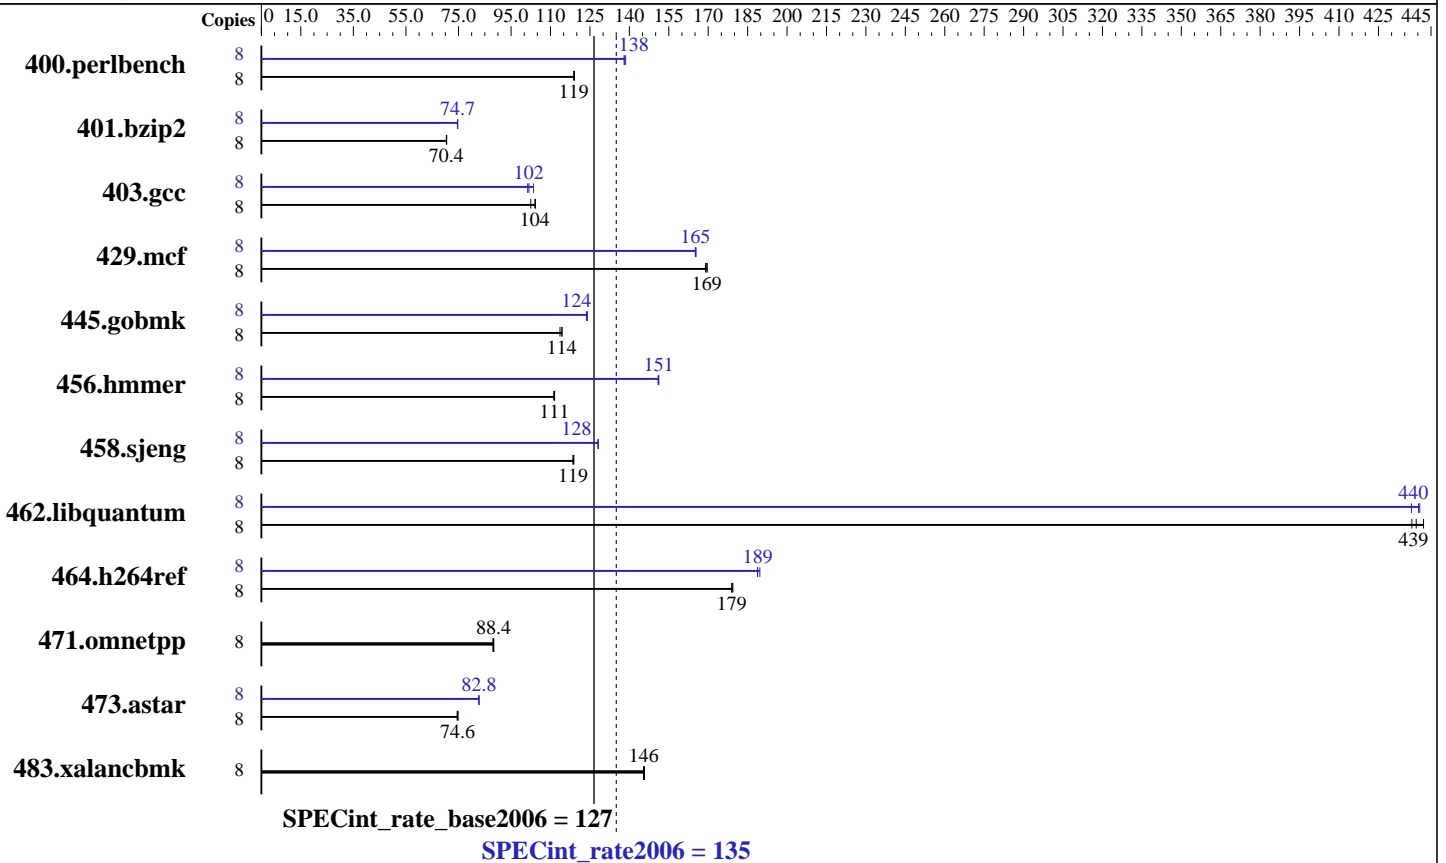

Hardware

CPU Name: Intel Xeon E5504
 CPU Characteristics:
 CPU MHz: 2000
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 4 MB I+D on chip per chip
 Other Cache: None
 Memory: 24 GB (6 x 4 GB PC3-8500, 1066 MHz, DDR3, ECC, downclocked to 800 MHz)
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: SuSe Linux Enterprise Server 10 (x86_64) with SP2, kernel 2.6.16.60-0.21-smp
 Compiler: Intel C++ Compiler 11.0 for Linux Build 20080930 Package ID: l_cproc_p_11.0.066
 Auto Parallel: No
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Binutils 2.18.50.0.7.20080502
 Microquill SmartHeap V8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

SPECint_rate2006 = **135**

ACTINA SOLAR 212 X3 (Intel Xeon E5504)

SPECint_rate_base2006 = 127

CPU2006 license: 9008

Test date: Nov-2009

Test sponsor: ACTION S.A.

Hardware Availability: Apr-2009

Tested by: ACTION S.A.

Software Availability: Feb-2009

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	657	119	656	119	658	119	8	564	139	566	138	566	138
401.bzip2	8	1095	70.5	1097	70.4	1096	70.4	8	1034	74.7	1035	74.6	1034	74.7
403.gcc	8	617	104	628	102	619	104	8	633	102	636	101	622	104
429.mcf	8	430	169	432	169	430	170	8	442	165	441	165	442	165
445.gobmk	8	739	114	734	114	734	114	8	678	124	677	124	679	124
456.hammer	8	671	111	669	111	669	112	8	495	151	494	151	494	151
458.sjeng	8	816	119	817	119	814	119	8	756	128	756	128	755	128
462.libquantum	8	379	438	377	439	375	442	8	379	438	377	440	376	441
464.h264ref	8	989	179	987	179	989	179	8	934	190	938	189	938	189
471.omnetpp	8	566	88.4	568	88.1	566	88.4	8	566	88.4	568	88.1	566	88.4
473.astar	8	754	74.5	752	74.6	750	74.8	8	678	82.8	678	82.8	679	82.7
483.xalancbmk	8	380	145	379	146	379	146	8	380	145	379	146	379	146

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

General Notes

'numactl' was used to bind copies to the cores
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

SPECint_rate2006 = 135

ACTINA SOLAR 212 X3 (Intel Xeon E5504)

SPECint_rate_base2006 = 127

CPU2006 license: 9008

Test date: Nov-2009

Test sponsor: ACTION S.A.

Hardware Availability: Apr-2009

Tested by: ACTION S.A.

Software Availability: Feb-2009

Base Optimization Flags

C benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc  
-opt-malloc-options=3 -opt-prefetch
```

C++ benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/spec/cpu2006.1.1/lib -lsmartheap
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc
```

```
401.bzip2: /opt/intel/Compiler/11.0/080/bin/intel64/icc
```

```
456.hmmer: /opt/intel/Compiler/11.0/080/bin/intel64/icc
```

```
458.sjeng: /opt/intel/Compiler/11.0/080/bin/intel64/icc
```

C++ benchmarks (except as noted below):

```
icpc
```

```
473.astar: /opt/intel/Compiler/11.0/080/bin/intel64/icpc
```

Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_IA32
```

```
401.bzip2: -DSPEC_CPU_LP64
```

```
456.hmmer: -DSPEC_CPU_LP64
```

```
458.sjeng: -DSPEC_CPU_LP64
```

```
462.libquantum: -DSPEC_CPU_LINUX
```

```
473.astar: -DSPEC_CPU_LP64
```

```
483.xalancbmk: -DSPEC_CPU_LINUX
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

SPECint_rate2006 = 135

ACTINA SOLAR 212 X3 (Intel Xeon E5504)

SPECint_rate_base2006 = 127

CPU2006 license: 9008

Test date: Nov-2009

Test sponsor: ACTION S.A.

Hardware Availability: Apr-2009

Tested by: ACTION S.A.

Software Availability: Feb-2009

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -ansi-alias -opt-prefetch

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc
-opt-malloc-options=3

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
-ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
-ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static
-opt-malloc-options=3 -opt-prefetch

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=routine -auto-ilp32
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmarheap64

483.xalancbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

SPECint_rate2006 = 135

ACTINA SOLAR 212 X3 (Intel Xeon E5504)

SPECint_rate_base2006 = 127

CPU2006 license: 9008

Test date: Nov-2009

Test sponsor: ACTION S.A.

Hardware Availability: Apr-2009

Tested by: ACTION S.A.

Software Availability: Feb-2009

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 04:51:00 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 25 November 2009.