



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R710
(Intel Xeon E5530, 2.40 GHz)

SPECfp®2006 = 35.6

SPECfp_base2006 = 33.1

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Bull SAS

Test date: Mar-2010

Hardware Availability: Mar-2009

Software Availability: Dec-2009

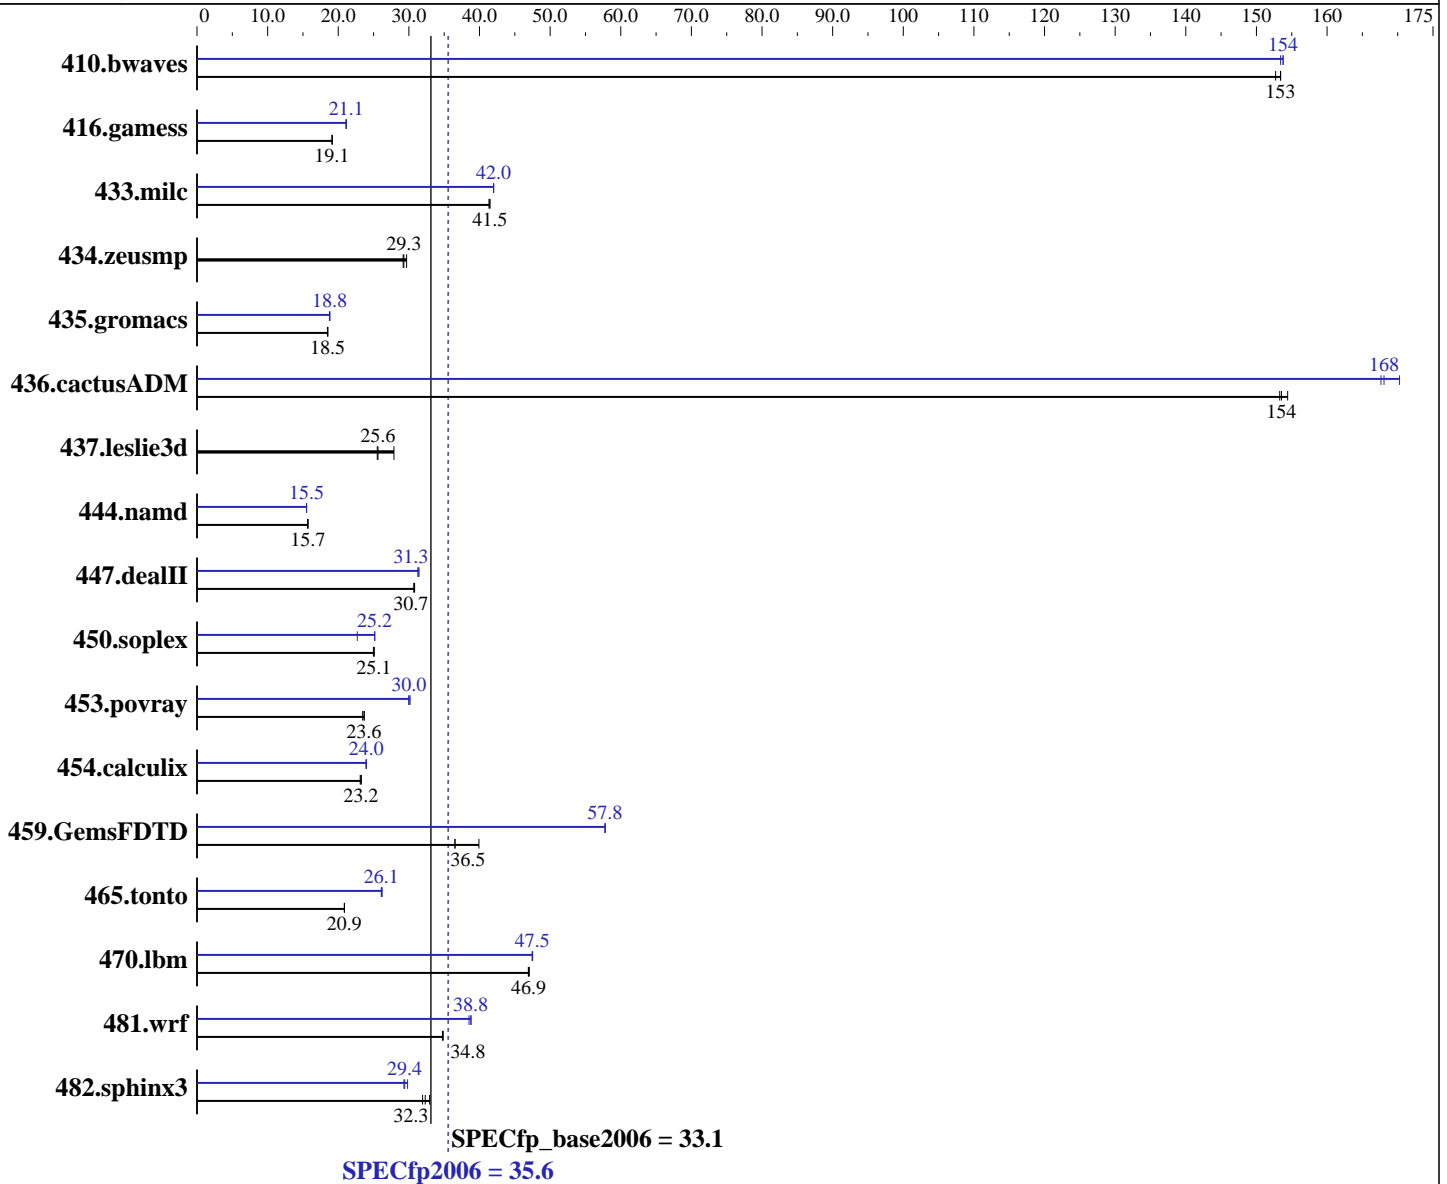

Hardware

CPU Name: Intel Xeon E5530
 CPU Characteristics: Intel Turbo Boost Technology up to 2.66 GHz
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2, SP2 with patch Linux kernel 20090119, Kernel 2.6.16.60-0.34-smp
 Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l_cproc_p_11.1.064, l_cprof_p_11.1.064
 Auto Parallel: Yes
 File System: ReiserFS

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R710
(Intel Xeon E5530, 2.40 GHz)

SPECfp2006 = **35.6**

SPECfp_base2006 = **33.1**

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Bull SAS

Test date: Mar-2010

Hardware Availability: Mar-2009

Software Availability: Dec-2009

L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 24 GB (6 x 4 GB PC3-10600R, 2 Rank, CL9-9-9, ECC, running at 1066 MHz)
Disk Subsystem: 1 x 73 GB SAS, 10000 RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	89.0	153	88.6	153	88.6	153	88.4	154	88.4	154	88.6	153
416.gamess	1024	19.1	1023	19.1	1022	19.2	927	21.1	927	21.1	927	21.1
433.milc	222	41.3	221	41.5	221	41.5	219	42.0	219	42.0	219	42.0
434.zeusmp	307	29.7	312	29.2	311	29.3	307	29.7	312	29.2	311	29.3
435.gromacs	387	18.5	386	18.5	386	18.5	379	18.8	381	18.8	380	18.8
436.cactusADM	77.8	154	77.4	154	78.0	153	71.1	168	71.3	168	70.2	170
437.leslie3d	337	27.9	368	25.5	367	25.6	337	27.9	368	25.5	367	25.6
444.namd	512	15.7	510	15.7	511	15.7	517	15.5	517	15.5	517	15.5
447.dealII	371	30.8	372	30.7	373	30.7	364	31.4	365	31.3	366	31.3
450.soplex	333	25.1	334	25.0	333	25.1	331	25.2	332	25.2	367	22.7
453.povray	225	23.7	225	23.6	227	23.5	178	30.0	177	30.0	176	30.2
454.calculix	356	23.2	355	23.3	357	23.1	345	23.9	344	24.0	344	24.0
459.GemsFDTD	266	39.9	290	36.5	290	36.5	184	57.8	184	57.8	184	57.8
465.tonto	472	20.9	471	20.9	471	20.9	375	26.2	377	26.1	377	26.1
470.lbm	293	46.9	293	46.9	292	47.0	289	47.5	290	47.5	289	47.5
481.wrf	321	34.8	321	34.8	321	34.8	288	38.8	290	38.5	288	38.8
482.sphinx3	610	31.9	592	32.9	603	32.3	663	29.4	654	29.8	665	29.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

General Notes

OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to granularity=fine,scatter
KMP_STACKSIZE set to 200M
The Dell PowerEdge R710 and
the Bull NovaScale R460 F2 models are electronically equivalent.
The results have been measured on a Bull NovaScale R460 F2 model.



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R710
(Intel Xeon E5530, 2.40 GHz)

SPECfp2006 = 35.6

SPECfp_base2006 = 33.1

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Bull SAS

Test date: Mar-2010
Hardware Availability: Mar-2009
Software Availability: Dec-2009

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Fortran benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R710
(Intel Xeon E5530, 2.40 GHz)

SPECfp2006 = 35.6

SPECfp_base2006 = 33.1

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Bull SAS

Test date: Mar-2010
Hardware Availability: Mar-2009
Software Availability: Dec-2009

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-ansi-alias

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-parallel -ansi-alias -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32
-unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias -scalar-rep- -auto-ilp32

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3 -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R710
(Intel Xeon E5530, 2.40 GHz)

SPECfp2006 = 35.6

SPECfp_base2006 = 33.1

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Bull SAS

Test date: Mar-2010

Hardware Availability: Mar-2009

Software Availability: Dec-2009

Peak Optimization Flags (Continued)

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
-parallel

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -opt-prefetch -parallel

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -opt-prefetch -parallel -auto-ilp32

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: Same as 454.calculix

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R710
(Intel Xeon E5530, 2.40 GHz)

SPECfp2006 = 35.6

SPECfp_base2006 = 33.1

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Bull SAS

Test date: Mar-2010

Hardware Availability: Mar-2009

Software Availability: Dec-2009

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 09:45:21 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 14 April 2010.