



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R610
(Intel Xeon E5502, 1.86 GHz)

SPECfp[®]2006 = 24.2

SPECfp_base2006 = 22.6

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Bull SAS

Test date: May-2010

Hardware Availability: Mar-2009

Software Availability: Dec-2009

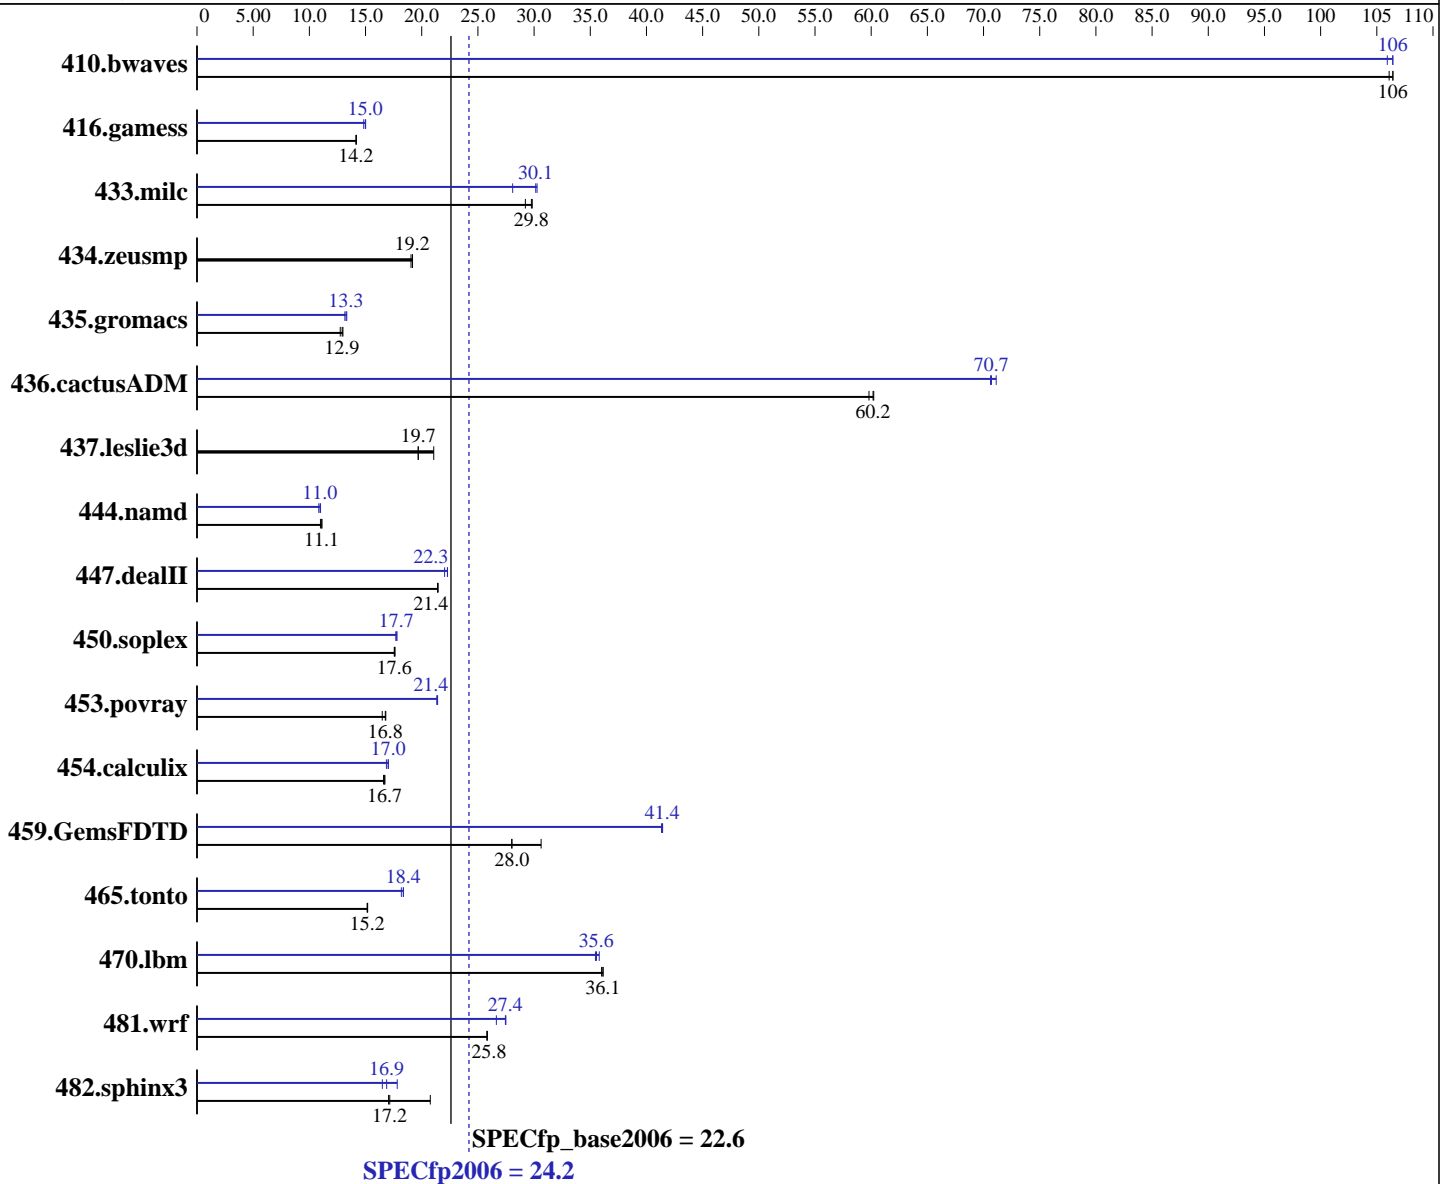

Hardware

CPU Name: Intel Xeon E5502
 CPU Characteristics:
 CPU MHz: 1867
 FPU: Integrated
 CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64),
Kernel 2.6.27.19-5-default
 Compiler: Intel C++ and Fortran Professional Compiler for
IA32 and Intel 64, Version 11.1
Build 20091130 Package ID: l_cproc_p_11.1.064,
l_cprof_p_11.1.064
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R610
(Intel Xeon E5502, 1.86 GHz)

SPECfp2006 = 24.2

SPECfp_base2006 = 22.6

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Bull SAS

Test date: May-2010

Hardware Availability: Mar-2009

Software Availability: Dec-2009

L3 Cache: 4 MB I+D on chip per chip
Other Cache: None
Memory: 48 GB (12 x 4 GB PC3-10600R, 2 Rank, CL9-9-9, ECC, running at 800 MHz)
Disk Subsystem: 1 x 73 GB SAS, 10000 RPM
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	128	106	128	106	128	106	128	106	128	106	128	106
416.gamess	1383	14.2	1382	14.2	1382	14.2	1307	15.0	1320	14.8	1305	15.0
433.milc	308	29.8	308	29.8	314	29.2	305	30.1	327	28.1	303	30.3
434.zeusmp	474	19.2	478	19.0	475	19.2	474	19.2	478	19.0	475	19.2
435.gromacs	560	12.7	550	13.0	553	12.9	538	13.3	543	13.2	536	13.3
436.cactusADM	199	60.2	200	59.8	198	60.2	169	70.6	168	71.1	169	70.7
437.leslie3d	477	19.7	478	19.7	446	21.1	477	19.7	478	19.7	446	21.1
444.namd	722	11.1	722	11.1	730	11.0	729	11.0	732	11.0	740	10.8
447.dealII	534	21.4	534	21.4	533	21.4	513	22.3	519	22.0	513	22.3
450.soplex	473	17.6	475	17.6	475	17.6	471	17.7	468	17.8	470	17.7
453.povray	317	16.8	317	16.8	323	16.5	249	21.4	249	21.3	248	21.4
454.calculix	494	16.7	497	16.6	494	16.7	485	17.0	484	17.0	489	16.9
459.GemsFDTD	346	30.6	378	28.0	379	28.0	256	41.4	256	41.4	257	41.3
465.tonto	648	15.2	649	15.2	650	15.1	541	18.2	536	18.4	536	18.4
470.lbm	380	36.1	382	36.0	380	36.1	384	35.8	386	35.6	387	35.5
481.wrf	433	25.8	433	25.8	433	25.8	419	26.6	407	27.4	406	27.5
482.sphinx3	1143	17.0	1136	17.2	939	20.8	1182	16.5	1155	16.9	1094	17.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to granularity=fine,scatter
KMP_STACKSIZE set to 200M
Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502
The Dell PowerEdge R610 and
the Bull NovaScale R440 F2 models are electronically equivalent.
The results have been measured on a Bull NovaScale R440 F2 model.

Base Compiler Invocation

C benchmarks:
icc -m64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R610
(Intel Xeon E5502, 1.86 GHz)

SPECfp2006 = 24.2

SPECfp_base2006 = 22.6

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Bull SAS

Test date: May-2010
Hardware Availability: Mar-2009
Software Availability: Dec-2009

Base Compiler Invocation (Continued)

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R610
(Intel Xeon E5502, 1.86 GHz)

SPECfp2006 = 24.2

SPECfp_base2006 = 22.6

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Bull SAS

Test date: May-2010
Hardware Availability: Mar-2009
Software Availability: Dec-2009

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-ansi-alias

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-parallel -ansi-alias -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32
-unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias -scalar-rep- -auto-ilp32

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3 -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R610
(Intel Xeon E5502, 1.86 GHz)

SPECfp2006 = 24.2

SPECfp_base2006 = 22.6

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Bull SAS

Test date: May-2010

Hardware Availability: Mar-2009

Software Availability: Dec-2009

Peak Optimization Flags (Continued)

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
-parallel

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -opt-prefetch -parallel

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-inline-alloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -opt-prefetch -parallel -auto-ilp32

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: Same as 454.calculix

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100511.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100511.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R610
(Intel Xeon E5502, 1.86 GHz)

SPECfp2006 = 24.2

SPECfp_base2006 = 22.6

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Bull SAS

Test date: May-2010

Hardware Availability: Mar-2009

Software Availability: Dec-2009

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 08:16:09 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 22 June 2010.