



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

### SPECfp<sup>®</sup>\_rate2006 = 120

PRIMERGY TX200 S6, Intel Xeon L5609, 1.86 GHz

### SPECfp\_rate\_base2006 = 116

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Aug-2010

Hardware Availability: Jul-2010

Software Availability: Jan-2010

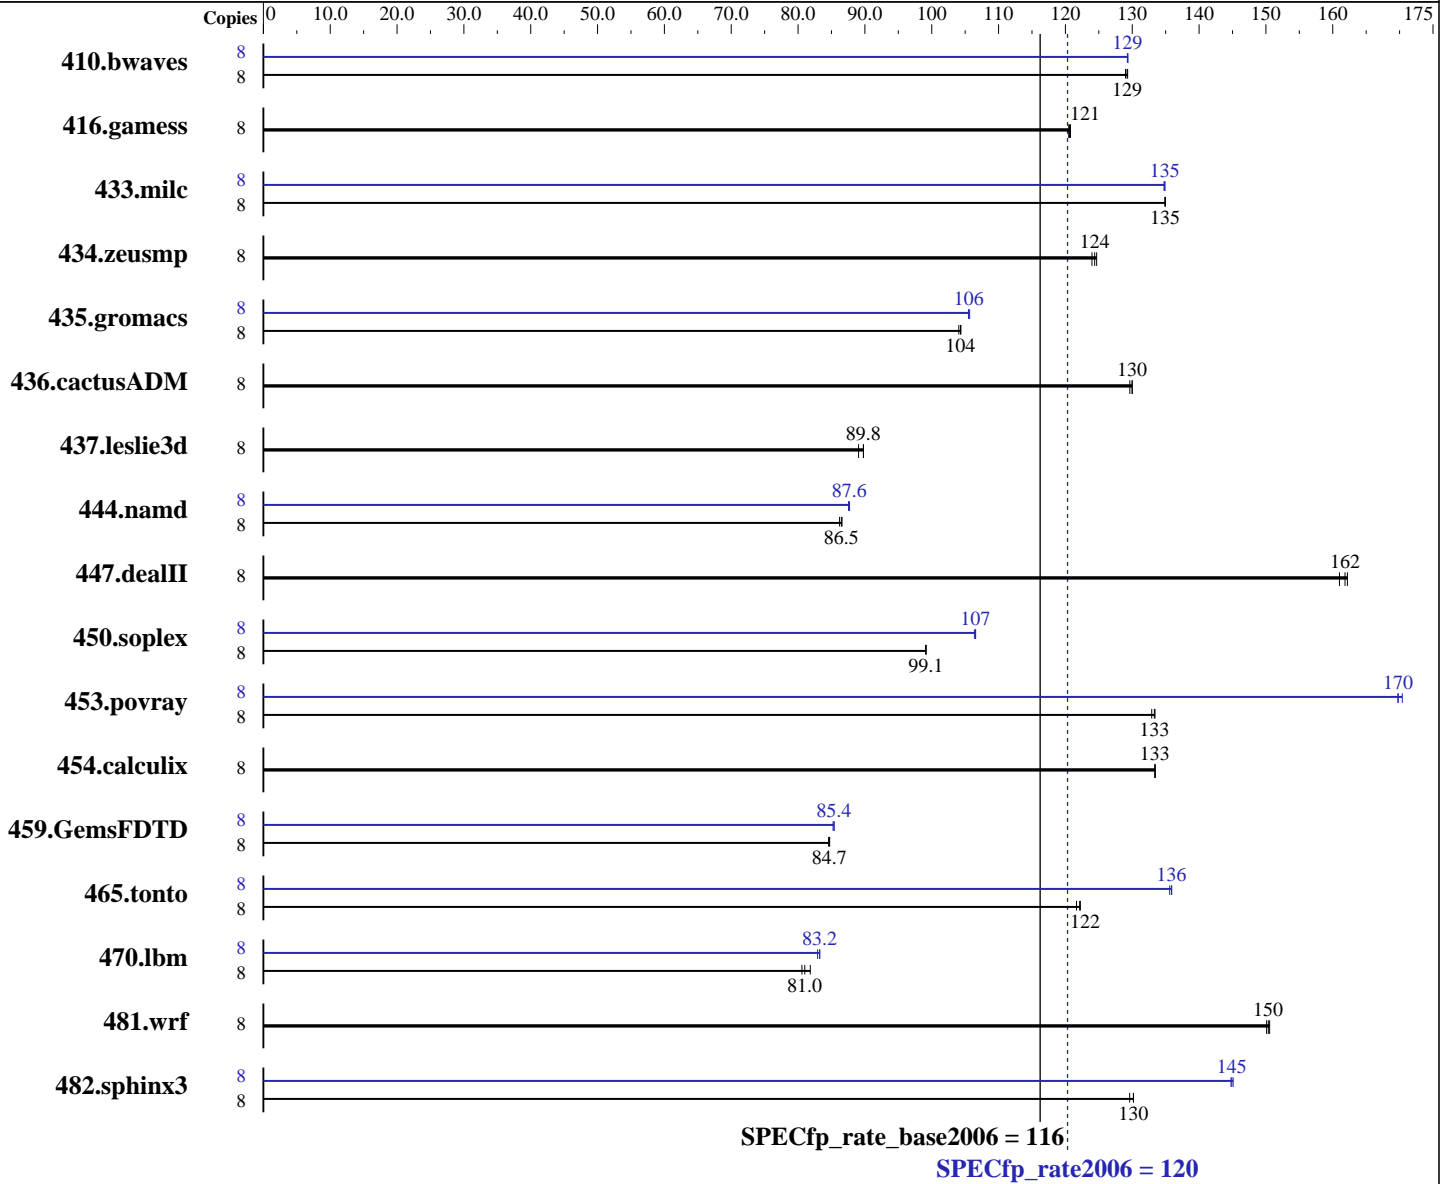

### Hardware

CPU Name: Intel Xeon L5609  
 CPU Characteristics:  
 CPU MHz: 1867  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64), Kernel 2.6.27.19-5-default  
 Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l\_cproc\_p\_11.1.064, l\_cprof\_p\_11.1.064  
 Auto Parallel: No  
 File System: ext3  
 System State: Multi-User Run Level 3

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECfp\_rate2006 = 120

PRIMERGY TX200 S6, Intel Xeon L5609, 1.86 GHz

SPECfp\_rate\_base2006 = 116

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Aug-2010

Hardware Availability: Jul-2010

Software Availability: Jan-2010

L3 Cache: 12 MB I+D on chip per chip  
Other Cache: None  
Memory: 48 GB (12x4 GB PC3-10600R, 2 rank, CL9-9-9, ECC, see add'l detail in notes)  
Disk Subsystem: 1 x SATA, 160 GB, 5.4 krpm  
Other Hardware: None

Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	8	843	129	841	129	<b>841</b>	<b>129</b>	8	840	129	<b>841</b>	<b>129</b>	841	129		
416.gamess	8	<b>1299</b>	<b>121</b>	1300	120	1297	121	8	<b>1299</b>	<b>121</b>	1300	120	1297	121		
433.milc	8	544	135	544	135	<b>544</b>	<b>135</b>	8	544	135	<b>545</b>	<b>135</b>	545	135		
434.zeusmp	8	<b>585</b>	<b>124</b>	587	124	584	125	8	<b>585</b>	<b>124</b>	587	124	584	125		
435.gromacs	8	<b>548</b>	<b>104</b>	547	104	549	104	8	<b>541</b>	<b>106</b>	541	106	541	105		
436.cactusADM	8	735	130	737	130	<b>736</b>	<b>130</b>	8	735	130	737	130	<b>736</b>	<b>130</b>		
437.leslie3d	8	838	89.8	844	89.1	<b>838</b>	<b>89.8</b>	8	838	89.8	844	89.1	<b>838</b>	<b>89.8</b>		
444.namd	8	<b>742</b>	<b>86.5</b>	744	86.2	741	86.6	8	733	87.5	732	87.7	<b>732</b>	<b>87.6</b>		
447.dealII	8	<b>565</b>	<b>162</b>	568	161	564	162	8	<b>565</b>	<b>162</b>	568	161	564	162		
450.soplex	8	673	99.1	673	99.2	<b>673</b>	<b>99.1</b>	8	627	106	<b>626</b>	<b>107</b>	626	107		
453.povray	8	<b>319</b>	<b>133</b>	319	133	320	133	8	250	170	<b>251</b>	<b>170</b>	251	170		
454.calculix	8	495	133	495	133	<b>495</b>	<b>133</b>	8	495	133	495	133	<b>495</b>	<b>133</b>		
459.GemsFDTD	8	1004	84.6	<b>1003</b>	<b>84.7</b>	1002	84.7	8	996	85.2	<b>994</b>	<b>85.4</b>	994	85.4		
465.tonto	8	644	122	<b>645</b>	<b>122</b>	647	122	8	<b>579</b>	<b>136</b>	579	136	581	136		
470.lbm	8	1364	80.6	<b>1357</b>	<b>81.0</b>	1343	81.8	8	1320	83.2	1326	82.9	<b>1321</b>	<b>83.2</b>		
481.wrf	8	<b>594</b>	<b>150</b>	594	151	595	150	8	<b>594</b>	<b>150</b>	594	151	595	150		
482.sphinx3	8	1203	130	1198	130	<b>1198</b>	<b>130</b>	8	1077	145	<b>1076</b>	<b>145</b>	1075	145		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

## Platform Notes

The system automatically configures the memory to run at 1066 MHz.  
BIOS configuration:  
Data Reuse Optimization = Disable



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp\_rate2006 = 120**

PRIMERGY TX200 S6, Intel Xeon L5609, 1.86 GHz

**SPECfp\_rate\_base2006 = 116**

**CPU2006 license:** 19  
**Test sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test date:** Aug-2010  
**Hardware Availability:** Jul-2010  
**Software Availability:** Jan-2010

## General Notes

For information about Fujitsu please visit: <http://www.fujitsu.com>

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static

Fortran benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp\_rate2006 = 120

PRIMERGY TX200 S6, Intel Xeon L5609, 1.86 GHz

SPECfp\_rate\_base2006 = 116

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Aug-2010  
Hardware Availability: Jul-2010  
Software Availability: Jan-2010

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:  
-xSSE4.2 -ipo -O3 -no-prec-div -static

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m64  
  
482.sphinx3: icc -m32  
  
C++ benchmarks (except as noted below):  
icpc -m64  
  
450.soplex: icpc -m32  
  
Fortran benchmarks:  
ifort -m64  
  
Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.deallI: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp\_rate2006 = 120

PRIMERGY TX200 S6, Intel Xeon L5609, 1.86 GHz

SPECfp\_rate\_base2006 = 116

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Aug-2010

Hardware Availability: Jul-2010

Software Availability: Jan-2010

## Peak Optimization Flags (Continued)

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-fno-alias -opt-prefetch

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3 -ansi-alias -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

### C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -auto -inline-calloc -opt-malloc-options=3

### Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp\_rate2006 = 120**

PRIMERGY TX200 S6, Intel Xeon L5609, 1.86 GHz

**SPECfp\_rate\_base2006 = 116**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Aug-2010

**Hardware Availability:** Jul-2010

**Software Availability:** Jan-2010

## Peak Optimization Flags (Continued)

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100708.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100708.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 14:42:03 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 12 October 2010.