



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

BladeSymphony 2000 (Intel Xeon X5680)

SPECfp®2006 = 48.5

CPU2006 license: 872


Test date: Dec-2010

Test sponsor: HITACHI

Hardware Availability: Jun-2010

Tested by: HITACHI

Software Availability: Dec-2009

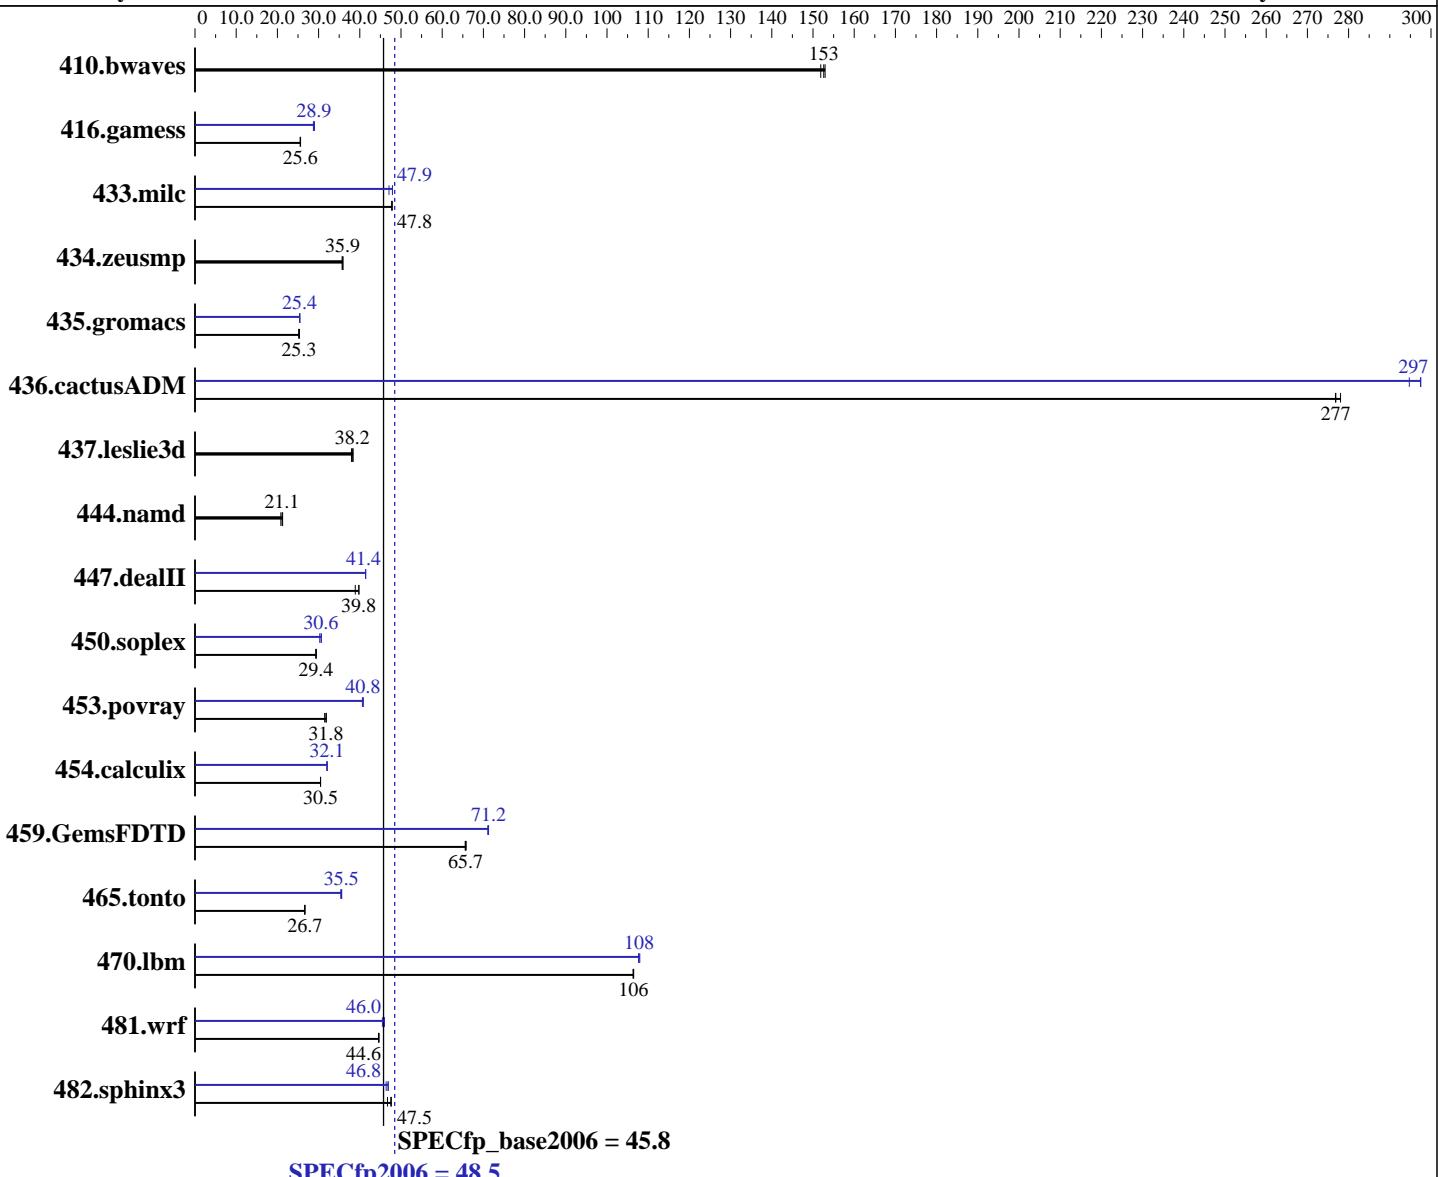

Hardware	
CPU Name:	Intel Xeon X5680
CPU Characteristics:	Intel Turbo Boost Technology up to 3.60 GHz
CPU MHz:	3333
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip
CPU(s) orderable:	1, 2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Software	
Operating System:	SuSE Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-default
Compiler:	Intel C++ Compiler 11.1 for Linux Build 20091130 Package ID: 1_cproc_p_11.1.064
Auto Parallel:	Intel Fortran Compiler 11.1 for Linux Build 20091130 Package ID: 1_cprof_p_11.1.064
File System:	Yes ext3
System State:	Run level 3 (multi-user)

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

BladeSymphony 2000 (Intel Xeon X5680)

SPECfp2006 = 48.5

CPU2006 license: 872

Test date: Dec-2010

Test sponsor: HITACHI

Hardware Availability: Jun-2010

Tested by: HITACHI

Software Availability: Dec-2009

L3 Cache: 12 MB I+D on chip per chip
 Other Cache: None
 Memory: 48 GB (6 x 8 GB 2Rx4 PC3-10600R-9, ECC)
 Disk Subsystem: 2 x 146 GB 10000 rpm SAS RAID1 configuration
 Other Hardware: None

Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	89.1	153	89.5	152	88.9	153	89.1	153	89.5	152	88.9	153
416.gamess	764	25.6	767	25.5	765	25.6	681	28.7	678	28.9	675	29.0
433.milc	192	47.8	192	47.8	192	47.8	195	47.1	192	47.9	192	47.9
434.zeusmp	255	35.7	253	35.9	254	35.9	255	35.7	253	35.9	254	35.9
435.gromacs	282	25.3	283	25.3	284	25.2	281	25.4	281	25.4	281	25.4
436.cactusADM	43.2	277	43.2	277	43.0	278	40.2	297	40.5	295	40.2	298
437.leslie3d	247	38.0	245	38.4	246	38.2	247	38.0	245	38.4	246	38.2
444.namd	385	20.8	379	21.1	377	21.3	385	20.8	379	21.1	377	21.3
447.dealII	294	38.9	287	39.8	288	39.8	276	41.4	276	41.4	276	41.4
450.soplex	283	29.4	284	29.3	284	29.4	272	30.6	272	30.7	275	30.3
453.povray	167	31.9	169	31.5	167	31.8	131	40.6	130	40.8	131	40.8
454.calculix	271	30.5	271	30.5	271	30.5	257	32.1	258	32.0	257	32.1
459.GemsFDTD	162	65.6	162	65.7	161	65.8	149	71.2	149	71.2	149	71.1
465.tonto	369	26.7	369	26.6	369	26.7	276	35.6	278	35.4	277	35.5
470.lbm	129	106	129	106	129	106	127	108	127	108	128	108
481.wrf	250	44.6	251	44.6	250	44.6	243	46.0	243	46.0	246	45.5
482.sphinx3	409	47.7	417	46.7	410	47.5	416	46.8	416	46.9	420	46.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
 OMP_NUM_THREADS set to number of cores
 KMP_AFFINITY set to granularity=fine,scatter

Platform Notes

BIOS Settings:
 Intel HT Technology = Disabled
 NUMA = Disabled



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

BladeSymphony 2000 (Intel Xeon X5680)

SPECfp2006 =

48.5

SPECfp_base2006 =

45.8

CPU2006 license: 872

Test sponsor: HITACHI

Tested by: HITACHI

Test date:

Dec-2010

Hardware Availability: Jun-2010

Software Availability: Dec-2009

Base Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

C++ benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

Fortran benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

Benchmarks using both Fortran and C:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

BladeSymphony 2000 (Intel Xeon X5680)

SPECfp2006 =

48.5

CPU2006 license: 872

Test date:

Dec-2010

Test sponsor: HITACHI

Hardware Availability:

Jun-2010

Tested by: HITACHI

Software Availability:

Dec-2009

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
    434.zeusmp: -DSPEC_CPU_LP64
    435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
    437.leslie3d: -DSPEC_CPU_LP64
        444.namd: -DSPEC_CPU_LP64
        447.dealII: -DSPEC_CPU_LP64
        453.povray: -DSPEC_CPU_LP64
        454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

```

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
 -ansi-alias

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
 -parallel -ansi-alias -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

BladeSymphony 2000 (Intel Xeon X5680)

SPECfp2006 =

48.5

CPU2006 license: 872

Test date: Dec-2010

Test sponsor: HITACHI

Hardware Availability: Jun-2010

Tested by: HITACHI

Software Availability: Dec-2009

Peak Optimization Flags (Continued)

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll12

C++ benchmarks:

444.namd: basepeak = yes

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
 -unroll12 -ansi-alias -scalar-rep -auto-ilp32

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
 -opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
 -unroll14 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
 -unroll12 -Ob0 -ansi-alias -scalar-rep

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
 -unroll12 -Ob0 -opt-prefetch -parallel

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
 -inline-calloc -opt-malloc-options=3 -auto -unroll14

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
 -opt-prefetch -auto-ilp32

436.cactusADM: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
 -unroll12 -opt-prefetch -parallel -auto-ilp32

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

BladeSymphony 2000 (Intel Xeon X5680)

SPECfp2006 =

48.5

SPECfp_base2006 =

45.8

CPU2006 license: 872

Test date: Dec-2010

Test sponsor: HITACHI

Hardware Availability: Jun-2010

Tested by: HITACHI

Software Availability: Dec-2009

Peak Optimization Flags (Continued)

481.wrf: Same as 454.calculix

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100929.03.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100929.03.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 16:30:48 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 7 January 2011.