



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL490c G7
(3.06 GHz, Intel Xeon X5675)

SPECint®2006 = 42.2

SPECint_base2006 = 40.1

CPU2006 license: 3


Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Jan-2011

Hardware Availability: Feb-2011

Software Availability: Dec-2010

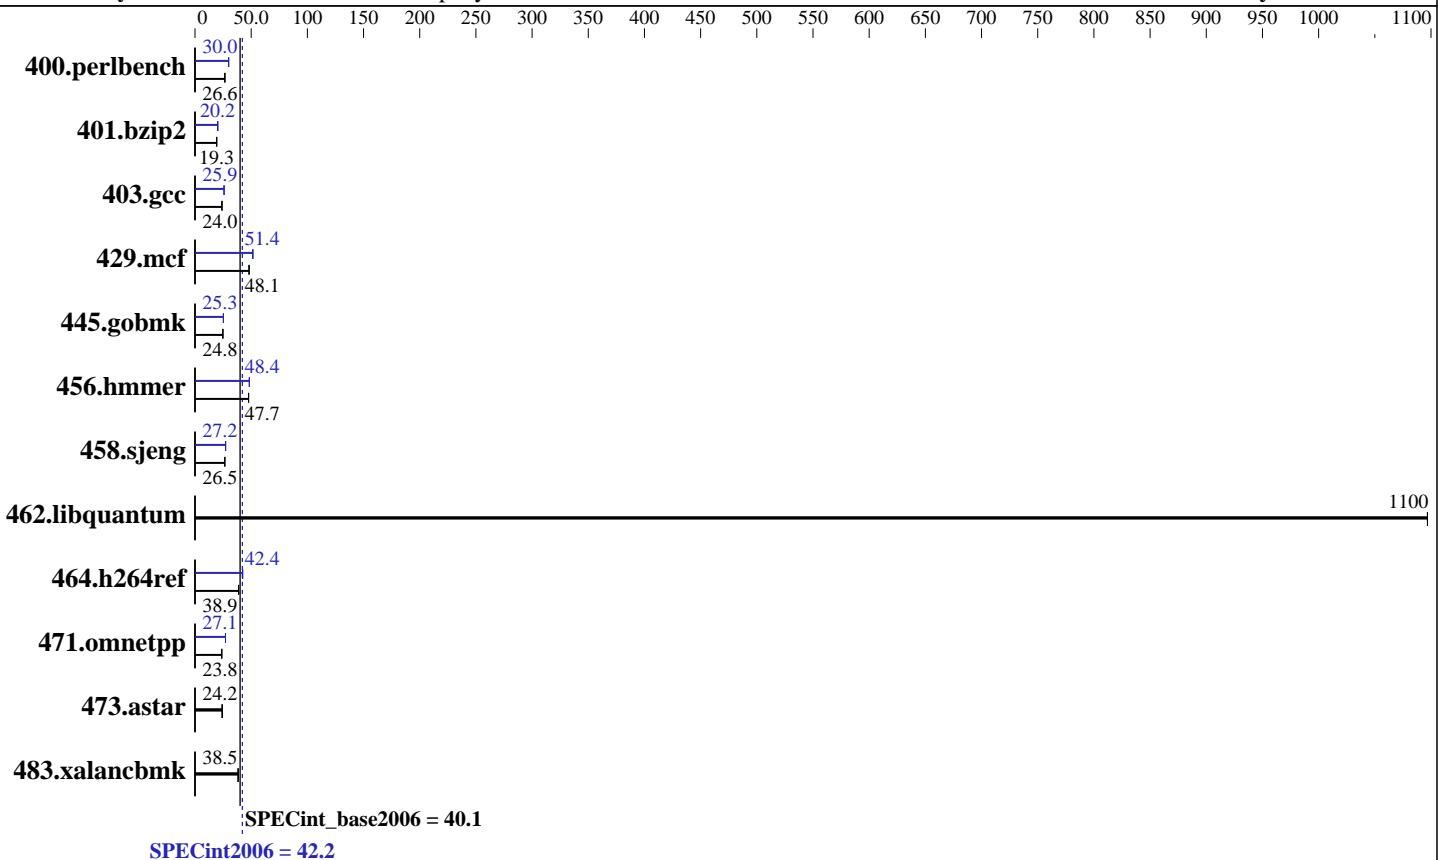

Hardware

CPU Name: Intel Xeon X5675
CPU Characteristics: Intel Turbo Boost Technology up to 3.46 GHz
CPU MHz: 3067
FPU: Integrated
CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core
L3 Cache: 12 MB I+D on chip per chip
Other Cache: None
Memory: 48 GB (12 x 4 GB 2Rx4 PC3-10600R-9, ECC)
Disk Subsystem: 1 x 120 GB SATA SSD
Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64) SP1, Kernel 2.6.32.12-0.7-default
Compiler: Intel C++ Intel 64 Compiler XE for applications running on Intel 64 Version 12.0.1.116 Build 20101116
Auto Parallel: Yes
File System: ext3
System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL490c G7
(3.06 GHz, Intel Xeon X5675)

SPECint2006 = 42.2

SPECint_base2006 = 40.1

CPU2006 license: 3

Test date: Jan-2011

Test sponsor: Hewlett-Packard Company

Hardware Availability: Feb-2011

Tested by: Hewlett-Packard Company

Software Availability: Dec-2010

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	368	26.6	368	26.5	367	26.6	326	30.0	327	29.8	326	30.0
401.bzip2	500	19.3	500	19.3	500	19.3	477	20.2	477	20.2	477	20.2
403.gcc	336	24.0	336	24.0	335	24.0	311	25.9	311	25.9	311	25.9
429.mcf	190	48.1	189	48.1	190	48.1	177	51.4	177	51.6	178	51.3
445.gobmk	423	24.8	423	24.8	423	24.8	415	25.3	415	25.3	415	25.3
456.hmmer	196	47.6	196	47.7	196	47.7	193	48.4	193	48.4	193	48.3
458.sjeng	457	26.5	457	26.5	454	26.6	444	27.2	444	27.2	444	27.2
462.libquantum	18.9	1100	18.9	1100	18.9	1100	18.9	1100	18.9	1100	18.9	1100
464.h264ref	570	38.9	569	38.9	572	38.7	522	42.4	522	42.4	522	42.4
471.omnetpp	263	23.8	262	23.8	262	23.8	230	27.1	230	27.1	230	27.2
473.astar	290	24.2	290	24.2	291	24.2	290	24.2	290	24.2	291	24.2
483.xalancbmk	179	38.5	181	38.2	179	38.5	179	38.5	181	38.2	179	38.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'nodev /mnt/hugepages hugetlbfs defaults 0 0' added to /etc/fstab
'unlimit -s unlimited' was used to set the stacksize to unlimited prior to run
echo 900 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

Platform Notes

BIOS configuration:

- HP Power Profile set to Maximum Performance
- Thermal Configuration set to Increased Cooling
- Data Reuse set to Disabled
- Intel Hyperthreading Options set to Disabled

General Notes

Binaries were compiled on RHEL5.5 with Binutils binutils-2.17.50.0.6-14.el5

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL490c G7
(3.06 GHz, Intel Xeon X5675)

SPECint2006 = 42.2

SPECint_base2006 = 40.1

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Jan-2011

Hardware Availability: Feb-2011

Software Availability: Dec-2010

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 403.gcc: -DSPEC_CPU_LP64
 429.mcf: -DSPEC_CPU_LP64
 445.gobmk: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
 471.omnetpp: -DSPEC_CPU_LP64
 473.astar: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT
```

C++ benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/smartheap -lsmartheap64
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64
```

```
400.perlbench: icc -m32
```

```
429.mcf: icc -m32
```

```
445.gobmk: icc -m32
```

```
464.h264ref: icc -m32
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL490c G7
(3.06 GHz, Intel Xeon X5675)

SPECint2006 = 42.2

SPECint_base2006 = 40.1

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Jan-2011

Hardware Availability: Feb-2011

Software Availability: Dec-2010

Peak Compiler Invocation (Continued)

C++ benchmarks (except as noted below):

icpc -m64

471.omnetpp: icpc -m32

Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
```

Peak Optimization Flags

C benchmarks:

```
400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
               -opt-prefetch -ansi-alias
               -B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32
               -opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -inline-calloc
               -opt-malloc-options=3 -auto-ilp32
               -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
               -auto-ilp32 -ansi-alias
               -B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
               -auto-ilp32 -ansi-alias
               -B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
               -ansi-alias
               -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL490c G7
(3.06 GHz, Intel Xeon X5675)

SPECint2006 = 42.2

SPECint_base2006 = 40.1

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Jan-2011

Hardware Availability: Feb-2011

Software Availability: Dec-2010

Peak Optimization Flags (Continued)

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll14

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll12 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-ra-region-strategy=block -ansi-alias -Wl,-z,muldefs
-L/smartheap -lsmartheap
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revA.html>
<http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20110216.00.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revA.xml>
<http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20110216.00.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL490c G7
(3.06 GHz, Intel Xeon X5675)

SPECint2006 = 42.2

SPECint_base2006 = 40.1

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Jan-2011

Hardware Availability: Feb-2011

Software Availability: Dec-2010

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 15:07:26 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 16 February 2011.