



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®2006 = 37.1

PowerEdge M710 (Intel Xeon E5649, 2.53 GHz)

SPECint\_base2006 = 35.0

CPU2006 license: 55


Test date: Feb-2011

Test sponsor: Dell Inc.

Hardware Availability: Feb-2011

Tested by: Dell Inc.

Software Availability: Jan-2011

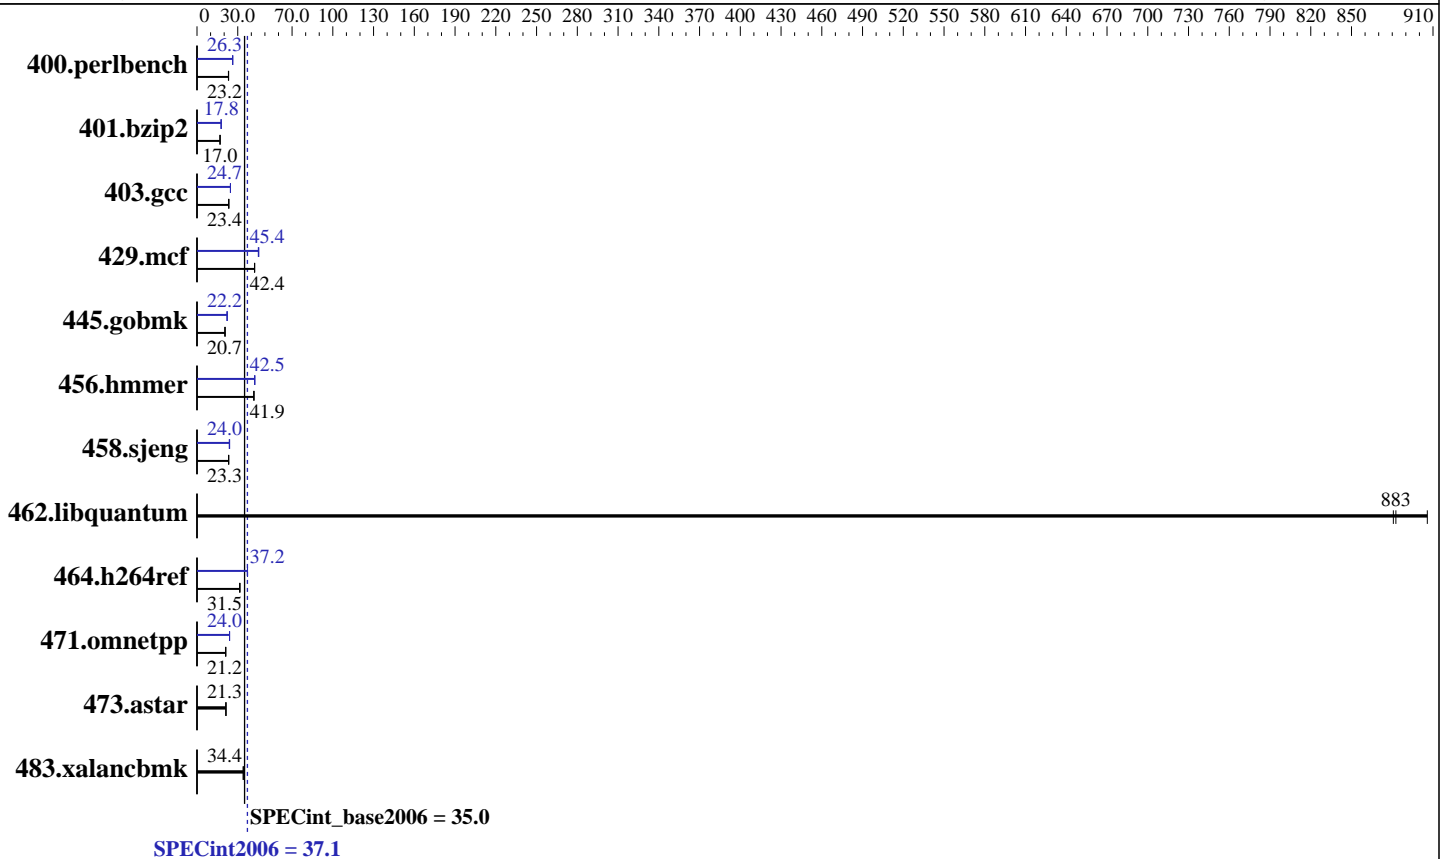

## Hardware

CPU Name: Intel Xeon E5649  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.93 GHz  
 CPU MHz: 2533  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 12 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 48 GB (12 x 4 GB 2Rx4 PC3-10600R-9, ECC)  
 Disk Subsystem: 1 x 146 GB 15000 RPM SAS  
 Other Hardware: None

## Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86\_64), Kernel 2.6.32.12-0.7-default  
 Compiler: Intel C++ Intel 64 Compiler XE for applications running on Intel 64 Version 12.0.1.116 Build 20101116  
 Auto Parallel: Yes  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 37.1

PowerEdge M710 (Intel Xeon E5649, 2.53 GHz)

SPECint\_base2006 = 35.0

CPU2006 license: 55  
Test sponsor: Dell Inc.  
Tested by: Dell Inc.

Test date: Feb-2011  
Hardware Availability: Feb-2011  
Software Availability: Jan-2011

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	420	23.3	422	23.1	<u>421</u>	<u>23.2</u>	<u>372</u>	<u>26.3</u>	372	26.3	372	26.3
401.bzip2	568	17.0	<u>568</u>	<u>17.0</u>	568	17.0	<u>542</u>	<u>17.8</u>	542	17.8	542	17.8
403.gcc	<u>344</u>	<u>23.4</u>	344	23.4	345	23.4	<u>327</u>	<u>24.7</u>	328	24.6	326	24.7
429.mcf	215	42.5	215	42.3	<u>215</u>	<u>42.4</u>	202	45.1	<u>201</u>	<u>45.4</u>	201	45.4
445.gobmk	<u>507</u>	<u>20.7</u>	506	20.7	512	20.5	473	22.2	473	22.2	<u>473</u>	<u>22.2</u>
456.hmmr	222	41.9	223	41.9	<u>223</u>	<u>41.9</u>	219	42.5	<u>219</u>	<u>42.5</u>	220	42.4
458.sjeng	<u>519</u>	<u>23.3</u>	519	23.3	519	23.3	510	23.7	504	24.0	<u>505</u>	<u>24.0</u>
462.libquantum	<u>23.5</u>	<u>883</u>	23.5	881	22.9	906	<u>23.5</u>	<u>883</u>	23.5	881	22.9	906
464.h264ref	705	31.4	<u>702</u>	<u>31.5</u>	700	31.6	595	37.2	<u>595</u>	<u>37.2</u>	596	37.1
471.omnetpp	<u>295</u>	<u>21.2</u>	296	21.1	295	21.2	261	23.9	260	24.0	<u>261</u>	<u>24.0</u>
473.astar	329	21.3	<u>330</u>	<u>21.3</u>	330	21.3	329	21.3	<u>330</u>	<u>21.3</u>	330	21.3
483.xalancbmk	200	34.5	204	33.9	<u>201</u>	<u>34.4</u>	200	34.5	204	33.9	<u>201</u>	<u>34.4</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'mount -t hugetlbfs nodev /mnt/hugepages' was used to enable large pages
echo 900 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

## Platform Notes

BIOS Settings:  
Power Management = Maximum Performance (Default = Active Power Controller)  
Data Reuse = Disabled (Default = Enabled)  
Logical Processor = Disabled (Default = Enabled)

## General Notes

OMP\_NUM\_THREADS set to number of cores  
Binaries were compiled on RHEL5.5

## Base Compiler Invocation

C benchmarks:  
icc -m64  
  
C++ benchmarks:  
icpc -m64



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 37.1

PowerEdge M710 (Intel Xeon E5649, 2.53 GHz)

SPECint\_base2006 = 35.0

CPU2006 license: 55

Test date: Feb-2011

Test sponsor: Dell Inc.

Hardware Availability: Feb-2011

Tested by: Dell Inc.

Software Availability: Jan-2011

## Base Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

```

## Base Optimization Flags

C benchmarks:

```

-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

```

C++ benchmarks:

```

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/smartheap -lsmartheap64
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

```

## Base Other Flags

C benchmarks:

```

403.gcc: -Dalloca=_alloca

```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```

icc -m64

400.perlbench: icc -m32

429.mcf: icc -m32

445.gobmk: icc -m32

464.h264ref: icc -m32

```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 37.1

PowerEdge M710 (Intel Xeon E5649, 2.53 GHz)

SPECint\_base2006 = 35.0

CPU2006 license: 55

Test date: Feb-2011

Test sponsor: Dell Inc.

Hardware Availability: Feb-2011

Tested by: Dell Inc.

Software Availability: Jan-2011

## Peak Compiler Invocation (Continued)

C++ benchmarks (except as noted below):

icpc -m64

471.omnetpp: icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
 401.bzip2: -DSPEC\_CPU\_LP64  
 403.gcc: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
 473.astar: -DSPEC\_CPU\_LP64  
 483.xalancbmk: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -opt-prefetch -ansi-alias  
 -B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32  
 -opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -inline-calloc  
 -opt-malloc-options=3 -auto-ilp32  
 -B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -auto-ilp32 -ansi-alias  
 -B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
 -auto-ilp32 -ansi-alias  
 -B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32  
 -ansi-alias  
 -B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 37.1

PowerEdge M710 (Intel Xeon E5649, 2.53 GHz)

SPECint\_base2006 = 35.0

CPU2006 license: 55

Test date: Feb-2011

Test sponsor: Dell Inc.

Hardware Availability: Feb-2011

Tested by: Dell Inc.

Software Availability: Jan-2011

## Peak Optimization Flags (Continued)

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-ra-region-strategy=block -ansi-alias -Wl,-z,muldefs  
-L/smartheap -lsmartheap  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>  
<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110308.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>  
<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110308.xml>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 37.1

PowerEdge M710 (Intel Xeon E5649, 2.53 GHz)

SPECint\_base2006 = 35.0

CPU2006 license: 55

Test date: Feb-2011

Test sponsor: Dell Inc.

Hardware Availability: Feb-2011

Tested by: Dell Inc.

Software Availability: Jan-2011

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 16:01:17 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 29 March 2011.