



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint®_rate2006 = 314

ProLiant BL460c G7
(2.40 GHz, Intel Xeon E5645)

SPECint_rate_base2006 = 292

CPU2006 license: 3


Test date: Mar-2011

Test sponsor: Hewlett-Packard Company

Hardware Availability: Feb-2011

Tested by: Hewlett-Packard Company

Software Availability: Dec-2010

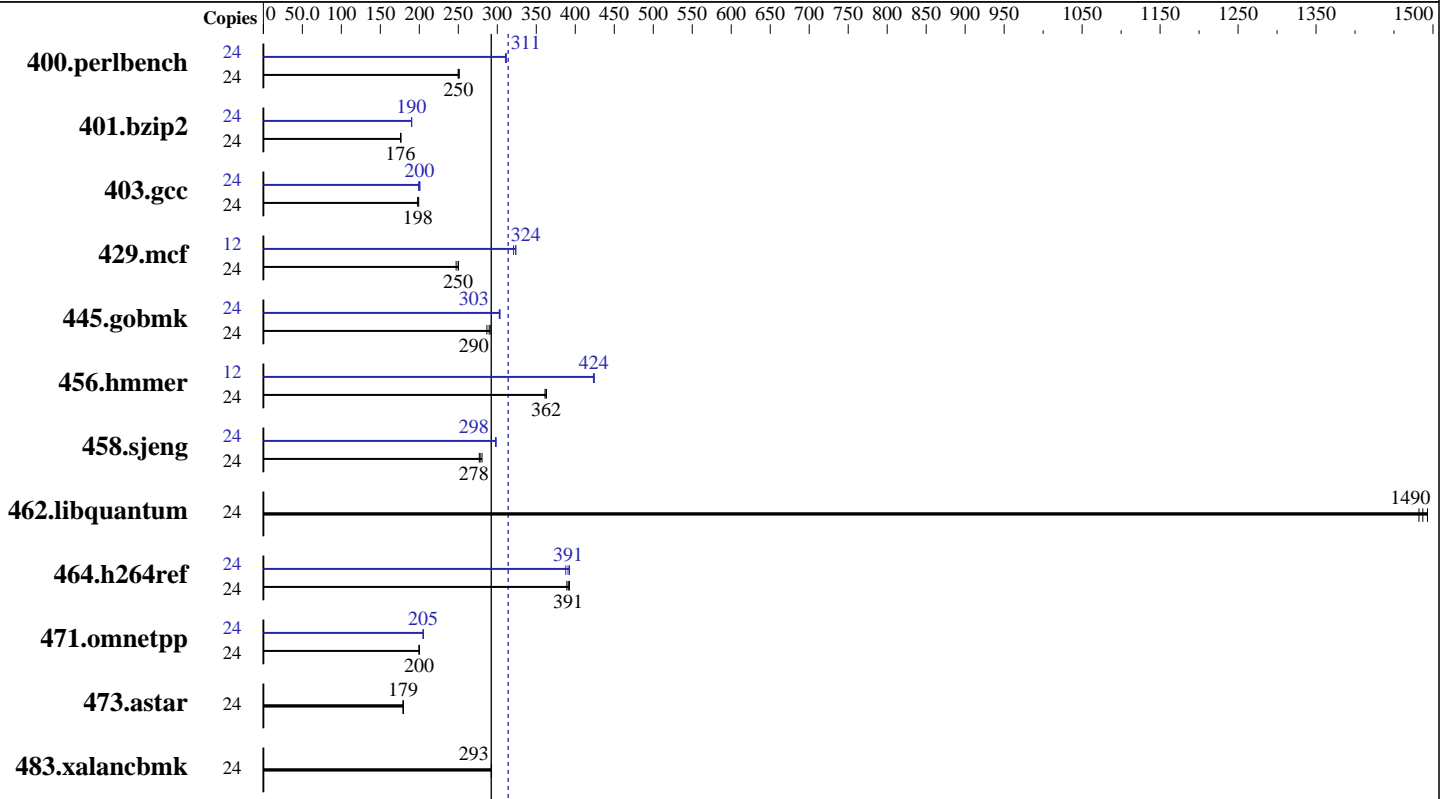

SPECint_rate2006 = 314

SPECint_rate_base2006 = 292

Hardware

CPU Name: Intel Xeon E5645
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 12 MB I+D on chip per chip
 Other Cache: None
 Memory: 96 GB (12 x 8 GB 2Rx4 PC3-10600R-9, ECC)
 Disk Subsystem: 1 x 146 GB 10 K SAS
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64) SP1, Kernel 2.6.32.12-0.7-default
 Compiler: Intel C++ Compiler XE for applications running on IA-32, Version 12.0.1.116 Build 20101116
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 314

ProLiant BL460c G7
(2.40 GHz, Intel Xeon E5645)

SPECint_rate_base2006 = 292

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Mar-2011
Hardware Availability: Feb-2011
Software Availability: Dec-2010

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	933	251	938	250	938	250	24	753	312	755	310	754	311
401.bzip2	24	1316	176	1313	176	1316	176	24	1219	190	1218	190	1218	190
403.gcc	24	970	199	976	198	975	198	24	970	199	962	201	965	200
429.mcf	24	885	247	876	250	875	250	12	338	324	338	324	341	321
445.gobmk	24	865	291	878	287	870	290	24	831	303	832	303	830	303
456.hammer	24	617	363	618	362	620	361	12	265	423	264	424	264	424
458.sjeng	24	1036	280	1045	278	1049	277	24	974	298	973	298	975	298
462.libquantum	24	336	1480	334	1490	333	1490	24	336	1480	334	1490	333	1490
464.h264ref	24	1353	393	1365	389	1358	391	24	1359	391	1353	393	1370	388
471.omnetpp	24	750	200	751	200	751	200	24	732	205	732	205	731	205
473.astar	24	940	179	939	179	939	179	24	940	179	939	179	939	179
483.xalancbmk	24	567	292	566	293	566	293	24	567	292	566	293	566	293

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores.

Operating System Notes

```
'nodev /mnt/hugepages hugetlbfs defaults 0 0' added to /etc/fstab
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
echo 10800 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

Platform Notes

BIOS configuration:
HP Power Profile set to Maximum Performance
Thermal Configuration set to Increased Cooling
Data Reuse set to Disabled

General Notes

Binaries were compiled on RHEL5.5



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 314

ProLiant BL460c G7
(2.40 GHz, Intel Xeon E5645)

SPECint_rate_base2006 = 292

CPU2006 license: 3

Test date: Mar-2011

Test sponsor: Hewlett-Packard Company

Hardware Availability: Feb-2011

Tested by: Hewlett-Packard Company

Software Availability: Dec-2010

Base Compiler Invocation

C benchmarks:

icc -m32

C++ benchmarks:

icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/smartheap -lsmartheap
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 314

ProLiant BL460c G7
(2.40 GHz, Intel Xeon E5645)

SPECint_rate_base2006 = 292

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Mar-2011
Hardware Availability: Feb-2011
Software Availability: Dec-2010

Peak Compiler Invocation (Continued)

C++ benchmarks:
icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -auto-ilp32

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -auto-ilp32

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

462.libquantum: basepeak = yes

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 314

ProLiant BL460c G7
(2.40 GHz, Intel Xeon E5645)

SPECint_rate_base2006 = 292

CPU2006 license: 3

Test date: Mar-2011

Test sponsor: Hewlett-Packard Company

Hardware Availability: Feb-2011

Tested by: Hewlett-Packard Company

Software Availability: Dec-2010

Peak Optimization Flags (Continued)

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/smartheap -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

<http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20100525.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

<http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20100525.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 16:01:25 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 29 March 2011.