



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp®2006 = 45.0

PowerEdge M520 (Intel Xeon E5-2403, 1.80 GHz)

SPECfp\_base2006 = 43.4

CPU2006 license: 55


Test date: Mar-2012

Test sponsor: Dell Inc.

Hardware Availability: May-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

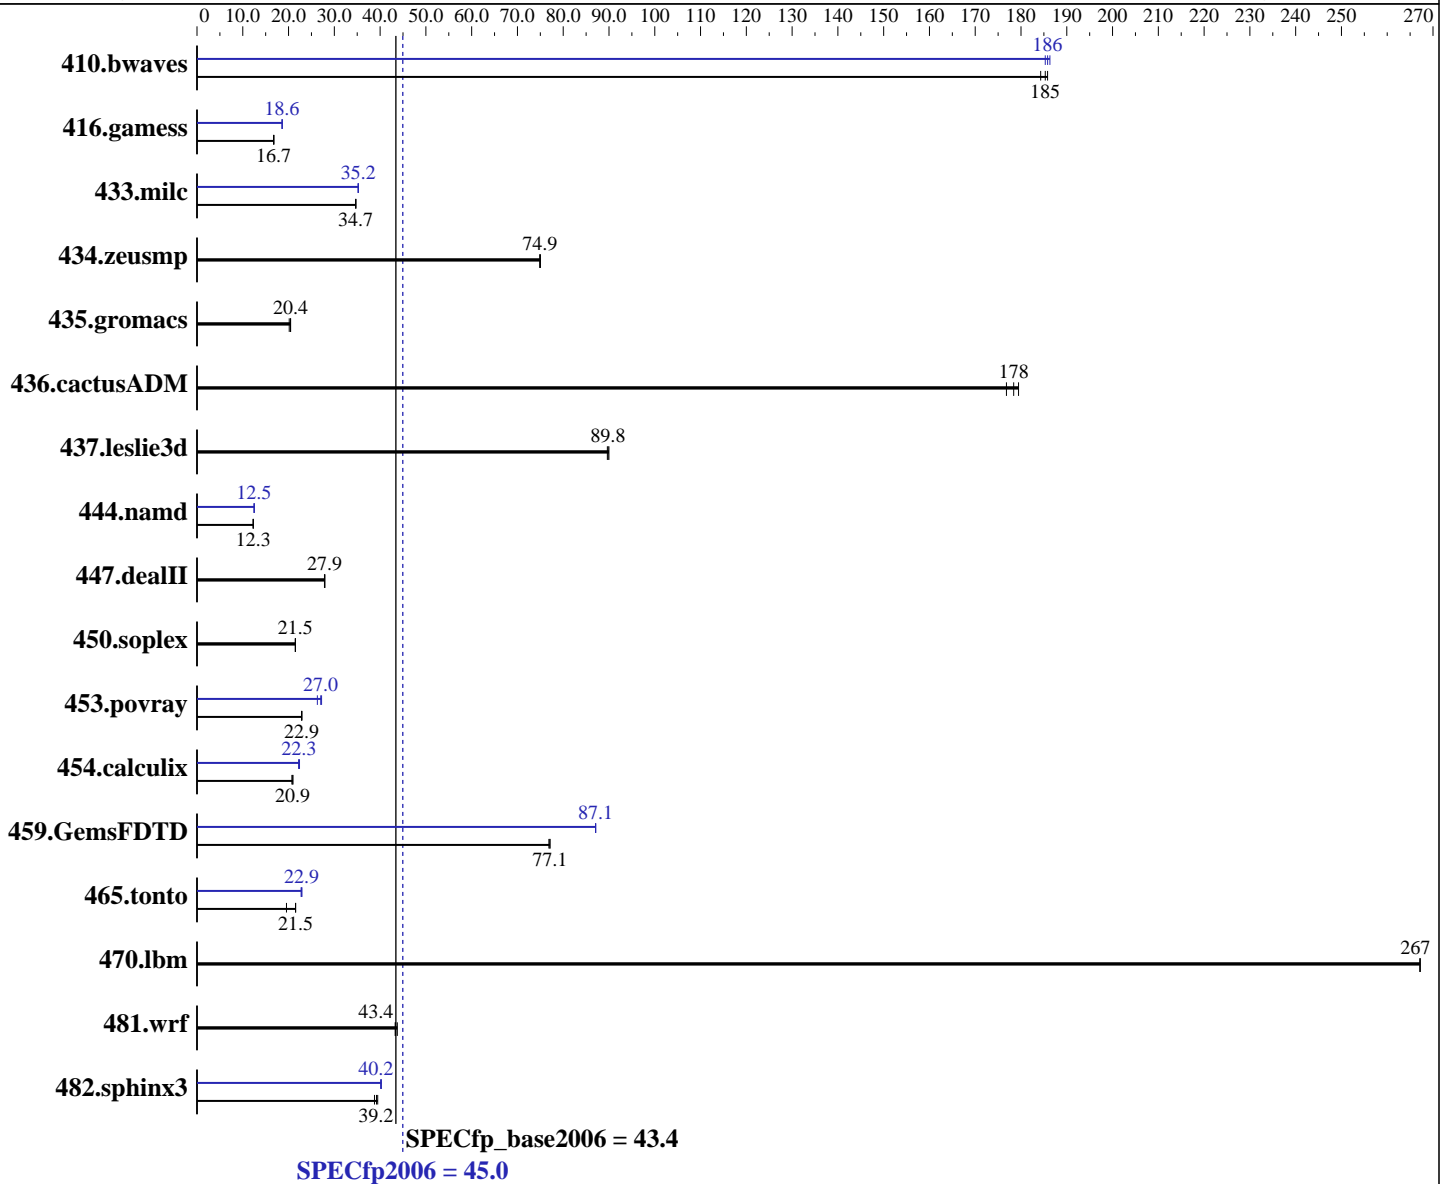

## Hardware

CPU Name: Intel Xeon E5-2403  
 CPU Characteristics:  
 CPU MHz: 1800  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

## Software

Operating System: SUSE Linux Enterprise Server 11 SP2 (x86\_64) 3.0.13-0.27-default  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;  
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (add definition here)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 45.0

PowerEdge M520 (Intel Xeon E5-2403, 1.80 GHz)

SPECfp\_base2006 = 43.4

CPU2006 license: 55

Test date: Mar-2012

Test sponsor: Dell Inc.

Hardware Availability: May-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

L3 Cache: 10 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 96 GB (12 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1066 MHz)  
 Disk Subsystem: 1 x 1 TB 7200 RPM SAS  
 Other Hardware: None

Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	73.7	184	73.1	186	<b>73.3</b>	<b>185</b>	72.9	186	<b>73.1</b>	<b>186</b>	73.3	185
416.gamess	1164	16.8	1170	16.7	<b>1170</b>	<b>16.7</b>	1052	18.6	1053	18.6	<b>1053</b>	<b>18.6</b>
433.milc	265	34.7	<b>265</b>	<b>34.7</b>	265	34.7	261	35.2	261	35.2	<b>261</b>	<b>35.2</b>
434.zeusmp	121	75.0	<b>121</b>	<b>74.9</b>	121	74.9	121	75.0	<b>121</b>	<b>74.9</b>	121	74.9
435.gromacs	349	20.4	<b>349</b>	<b>20.4</b>	354	20.1	349	20.4	<b>349</b>	<b>20.4</b>	354	20.1
436.cactusADM	66.6	179	<b>67.0</b>	<b>178</b>	67.6	177	66.6	179	<b>67.0</b>	<b>178</b>	67.6	177
437.leslie3d	104	90.0	105	89.6	<b>105</b>	<b>89.8</b>	104	90.0	105	89.6	<b>105</b>	<b>89.8</b>
444.namd	652	12.3	653	12.3	<b>653</b>	<b>12.3</b>	642	12.5	<b>642</b>	<b>12.5</b>	642	12.5
447.dealII	<b>410</b>	<b>27.9</b>	411	27.8	410	27.9	<b>410</b>	<b>27.9</b>	411	27.8	410	27.9
450.soplex	388	21.5	388	21.5	<b>388</b>	<b>21.5</b>	388	21.5	388	21.5	<b>388</b>	<b>21.5</b>
453.povray	233	22.8	<b>233</b>	<b>22.9</b>	232	22.9	<b>197</b>	<b>27.0</b>	202	26.3	195	27.2
454.calculix	398	20.7	<b>394</b>	<b>20.9</b>	394	20.9	<b>370</b>	<b>22.3</b>	372	22.2	368	22.4
459.GemsFDTD	138	76.9	138	77.1	<b>138</b>	<b>77.1</b>	122	87.1	122	87.1	<b>122</b>	<b>87.1</b>
465.tonto	<b>457</b>	<b>21.5</b>	456	21.6	503	19.5	<b>430</b>	<b>22.9</b>	430	22.9	433	22.7
470.lbm	<b>51.4</b>	<b>267</b>	51.4	267	51.4	267	<b>51.4</b>	<b>267</b>	51.4	267	51.4	267
481.wrf	255	43.8	<b>257</b>	<b>43.4</b>	258	43.3	255	43.8	<b>257</b>	<b>43.4</b>	258	43.3
482.sphinx3	503	38.8	494	39.5	<b>497</b>	<b>39.2</b>	<b>485</b>	<b>40.2</b>	484	40.3	486	40.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

CPU Power Management set to Maximum Performance  
 Memory Frequency set to Maximum Performance  
 Turbo Boost set to Enabled  
 C States/C1E set to Enabled  
 Sysinfo program /root/CPU2006-1.2/config/sysinfo.rev6800  
 \$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3  
 running on Blur-2P Tue Mar 20 12:20:33 2012

This section contains SUT (System Under Test) info as seen by

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 45.0

PowerEdge M520 (Intel Xeon E5-2403, 1.80 GHz)

SPECfp\_base2006 = 43.4

CPU2006 license: 55

Test date: Mar-2012

Test sponsor: Dell Inc.

Hardware Availability: May-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

## Platform Notes (Continued)

some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
  model name : Intel(R) Xeon(R) CPU E5-2403 0 @ 1.80GHz
  2 "physical id"s (chips)
  8 "processors"
  cores, siblings (Caution: counting these is hw and system dependent. The
  following excerpts from /proc/cpuinfo might not be reliable. Use with
  caution.)
    cpu cores : 4
    siblings  : 4
    physical 0: cores 0 1 2 3
    physical 1: cores 0 1 2 3
  cache size : 10240 KB

```

```

From /proc/meminfo
MemTotal:      99092560 kB
HugePages_Total:    0
Hugepagesize:   2048 kB

```

```

/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 11 (x86_64)

```

```

From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 2

```

```

uname -a:
Linux Blur-2P 3.0.13-0.27-default #1 SMP Wed Feb 15 13:33:49 UTC 2012
(d73692b) x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Mar 20 01:23 last=S

```

SPEC is set to: /root/CPU2006-1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdal       ext3  913G   22G  846G   3% /

```

Additional information from dmidecode:

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

```

KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/root/CPU2006-1.2/libs/32:/root/CPU2006-1.2/libs/64"
OMP_NUM_THREADS = "8"

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 45.0

PowerEdge M520 (Intel Xeon E5-2403, 1.80 GHz)

SPECfp\_base2006 = 43.4

CPU2006 license: 55

Test date: Mar-2012

Test sponsor: Dell Inc.

Hardware Availability: May-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

## General Notes (Continued)

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5  
Transparent Huge Pages disabled with:  
echo never > /sys/kernel/mm/transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 45.0

PowerEdge M520 (Intel Xeon E5-2403, 1.80 GHz)

SPECfp\_base2006 = 43.4

CPU2006 license: 55

Test date: Mar-2012

Test sponsor: Dell Inc.

Hardware Availability: May-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

## Base Optimization Flags (Continued)

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias  
-parallel

C++ benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 45.0

PowerEdge M520 (Intel Xeon E5-2403, 1.80 GHz)

SPECfp\_base2006 = 43.4

CPU2006 license: 55

Test date: Mar-2012

Test sponsor: Dell Inc.

Hardware Availability: May-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

## Peak Optimization Flags (Continued)

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel  
-static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

### Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120410.00.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120410.00.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 45.0

PowerEdge M520 (Intel Xeon E5-2403, 1.80 GHz)

SPECfp\_base2006 = 43.4

CPU2006 license: 55

Test date: Mar-2012

Test sponsor: Dell Inc.

Hardware Availability: May-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 06:30:57 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 5 June 2012.