



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp[®]2006 = 66.7

PowerEdge M520 (Intel Xeon E5-2440, 2.40 GHz)

SPECfp_base2006 = 63.6

CPU2006 license: 55


Test date: Apr-2012

Test sponsor: Dell Inc.

Hardware Availability: May-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

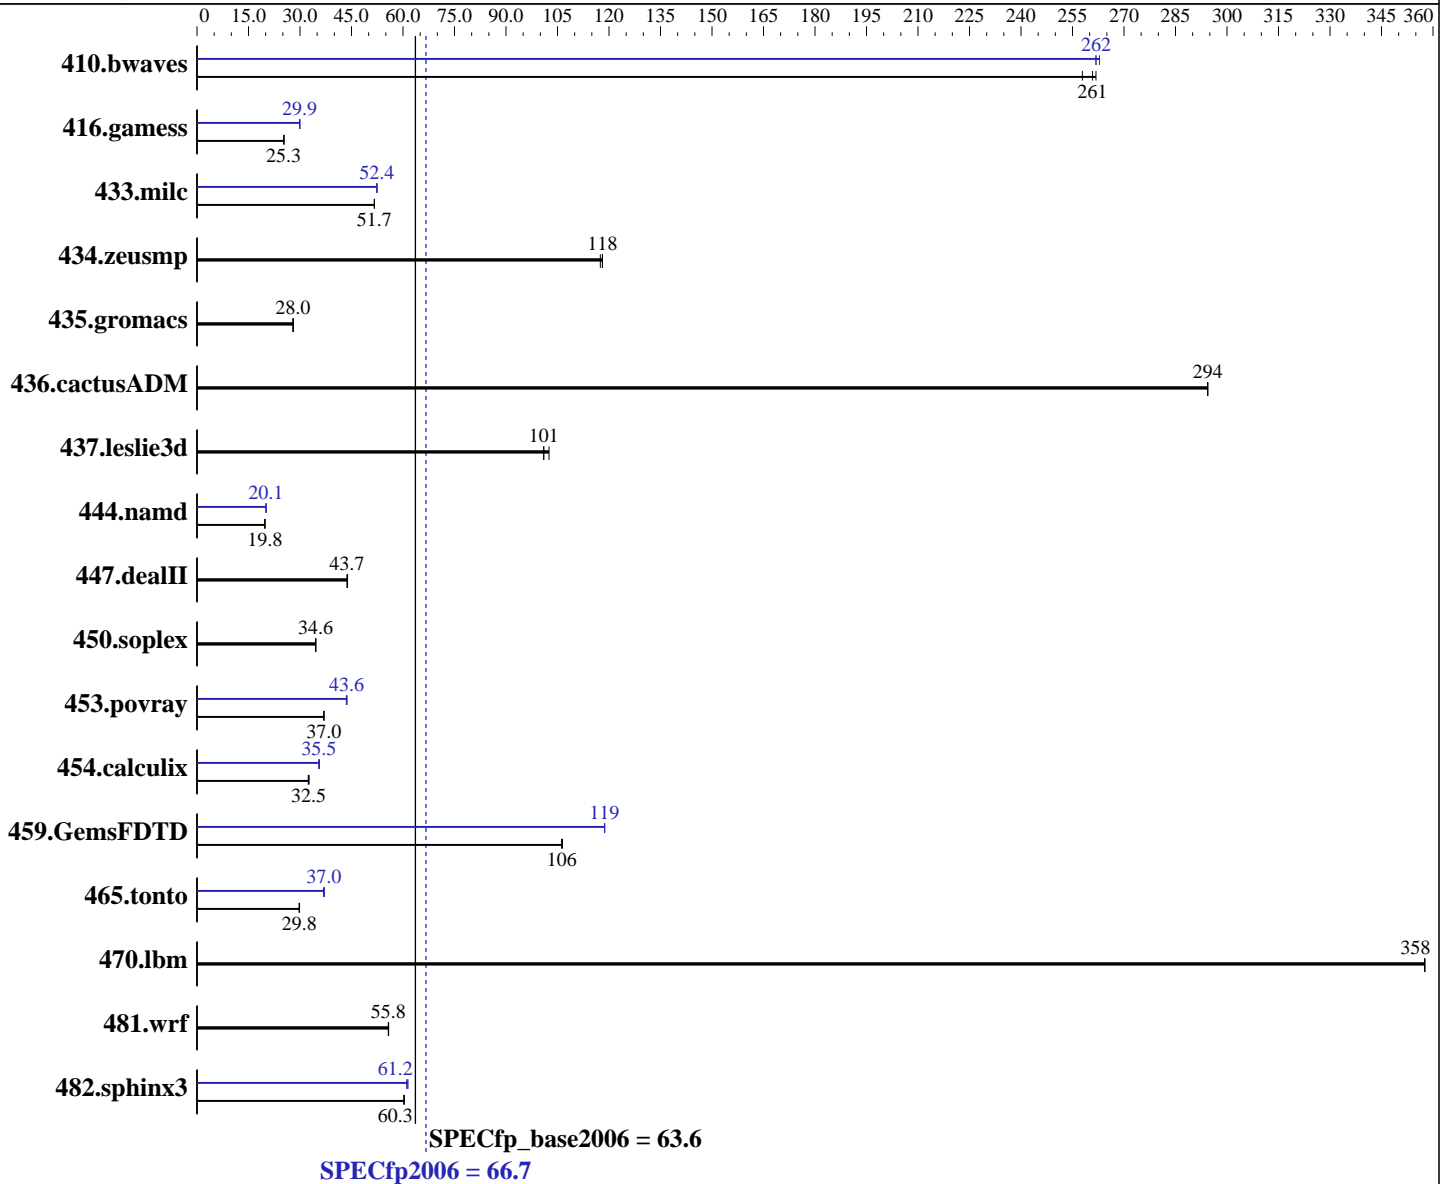

Hardware

CPU Name: Intel Xeon E5-2440
 CPU Characteristics: Intel Turbo Boost Technology up to 2.90 GHz
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 SP2 (x86_64) 3.0.13-0.27-default
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (add definition here)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 66.7

PowerEdge M520 (Intel Xeon E5-2440, 2.40 GHz)

SPECfp_base2006 = 63.6

CPU2006 license: 55

Test date: Apr-2012

Test sponsor: Dell Inc.

Hardware Availability: May-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

L3 Cache: 15 MB I+D on chip per chip
 Other Cache: None
 Memory: 96 GB (12 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1333 MHz)
 Disk Subsystem: 1 x 600 GB 10000 RPM SAS
 Other Hardware: None

Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	52.7	258	52.1	261	51.9	262	51.9	262	51.7	263	51.9	262
416.gamess	775	25.3	772	25.4	776	25.2	656	29.8	653	30.0	654	29.9
433.milc	178	51.7	178	51.7	178	51.7	175	52.4	175	52.4	175	52.4
434.zeusmp	77.1	118	77.5	117	77.1	118	77.1	118	77.5	117	77.1	118
435.gromacs	256	27.9	255	28.0	255	28.1	256	27.9	255	28.0	255	28.1
436.cactusADM	40.6	294	40.6	294	40.6	294	40.6	294	40.6	294	40.6	294
437.leslie3d	93.1	101	93.1	101	91.7	103	93.1	101	93.1	101	91.7	103
444.namd	405	19.8	405	19.8	406	19.8	399	20.1	399	20.1	399	20.1
447.dealII	261	43.8	262	43.7	262	43.7	261	43.8	262	43.7	262	43.7
450.soplex	241	34.6	241	34.6	241	34.6	241	34.6	241	34.6	241	34.6
453.povray	144	37.0	144	36.9	144	37.0	122	43.6	122	43.7	122	43.5
454.calculix	254	32.5	253	32.6	255	32.4	232	35.5	231	35.7	232	35.5
459.GemsFDTD	99.9	106	99.9	106	99.7	106	89.4	119	89.4	119	89.4	119
465.tonto	329	29.9	331	29.8	330	29.8	265	37.1	266	37.0	267	36.8
470.lbm	38.4	358	38.4	358	38.4	358	38.4	358	38.4	358	38.4	358
481.wrf	200	55.7	200	55.8	200	55.8	200	55.7	200	55.8	200	55.8
482.sphinx3	323	60.4	323	60.2	323	60.3	317	61.5	318	61.2	319	61.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

CPU Power Management set to Maximum Performance
 Memory Frequency set to Maximum Performance
 Turbo Boost set to Enabled
 C States/C1E set to Enabled
 Sysinfo program /root/CPU2006-1.2/config/sysinfo.rev6800
 \$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3
 running on linux-SLES11 Wed Apr 4 06:07:15 2012

This section contains SUT (System Under Test) info as seen by

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 66.7

PowerEdge M520 (Intel Xeon E5-2440, 2.40 GHz)

SPECfp_base2006 = 63.6

CPU2006 license: 55

Test date: Apr-2012

Test sponsor: Dell Inc.

Hardware Availability: May-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

Platform Notes (Continued)

some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
  model name : Intel(R) Xeon(R) CPU E5-2440 0 @ 2.40GHz
  2 "physical id"s (chips)
  24 "processors"
  cores, siblings (Caution: counting these is hw and system dependent. The
  following excerpts from /proc/cpuinfo might not be reliable. Use with
  caution.)
    cpu cores : 6
    siblings  : 12
    physical 0: cores 0 1 2 3 4 5
    physical 1: cores 0 1 2 3 4 5
  cache size : 15360 KB

```

```

From /proc/meminfo
MemTotal:      99027020 kB
HugePages_Total:    0
Hugepagesize:    2048 kB

```

```

/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 11 (x86_64)

```

```

From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 2

```

```

uname -a:
Linux linux-SLES11 3.0.13-0.27-default #1 SMP Wed Feb 15 13:33:49 UTC 2012
(d73692b) x86_64 x86_64 x86_64 GNU/Linux

```

```
run-level 3 Apr 3 22:57 last=5
```

```

SPEC is set to: /root/CPU2006-1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sd11        ext3  546G  9.2G  509G   2% /

```

Additional information from dmidecode:

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

```

KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/root/CPU2006-1.2/libs/32:/root/CPU2006-1.2/libs/64"
OMP_NUM_THREADS = "12"

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 66.7

PowerEdge M520 (Intel Xeon E5-2440, 2.40 GHz)

SPECfp_base2006 = 63.6

CPU2006 license: 55

Test date: Apr-2012

Test sponsor: Dell Inc.

Hardware Availability: May-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

General Notes (Continued)

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5
Transparent Huge Pages disabled with:
echo never > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 66.7

PowerEdge M520 (Intel Xeon E5-2440, 2.40 GHz)

SPECfp_base2006 = 63.6

CPU2006 license: 55

Test date: Apr-2012

Test sponsor: Dell Inc.

Hardware Availability: May-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

Base Optimization Flags (Continued)

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias
-parallel

C++ benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 66.7

PowerEdge M520 (Intel Xeon E5-2440, 2.40 GHz)

SPECfp_base2006 = 63.6

CPU2006 license: 55

Test date: Apr-2012

Test sponsor: Dell Inc.

Hardware Availability: May-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

Peak Optimization Flags (Continued)

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel
-static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120410.00.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120410.00.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 66.7

PowerEdge M520 (Intel Xeon E5-2440, 2.40 GHz)

SPECfp_base2006 = 63.6

CPU2006 license: 55

Test date: Apr-2012

Test sponsor: Dell Inc.

Hardware Availability: May-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 05:31:55 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 5 June 2012.