



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint®2006 = 36.3

PRIMERGY TX140 S1p, Intel Pentium G640, 2.80 GHz

SPECint_base2006 = 34.4

CPU2006 license: 19


Test date: May-2012

Test sponsor: Fujitsu

Hardware Availability: Jun-2012

Tested by: Fujitsu

Software Availability: Feb-2012

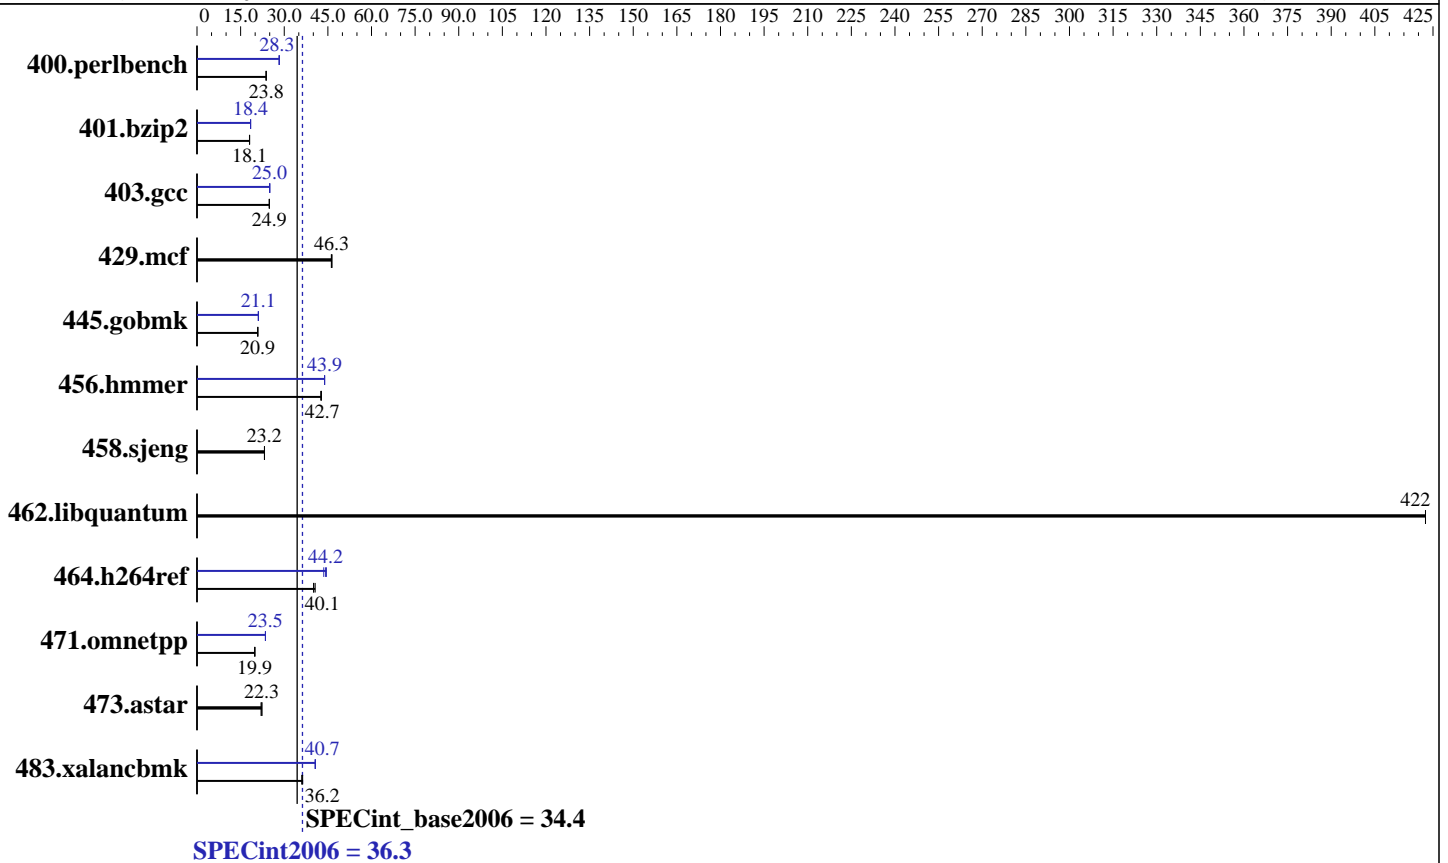

Hardware

CPU Name: Intel Pentium G640
 CPU Characteristics:
 CPU MHz: 2800
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 3 MB I+D on chip per chip
 Other Cache: None
 Memory: 8 GB (2 x 4 GB 2Rx8 PC3-12800E-11, ECC, running at 1067 MHz and CL7)
 Disk Subsystem: 1 x SATA, 500 GB, 7200 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)
 2.6.32-220.el6.x86_64
 Compiler: C/C++: Version 12.1.0.293 of Intel C++ Studio XE for Linux
 Auto Parallel: Yes
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint2006 = 36.3

PRIMERGY TX140 S1p, Intel Pentium G640, 2.80 GHz

SPECint_base2006 = 34.4

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: May-2012
Hardware Availability: Jun-2012
Software Availability: Feb-2012

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	411	23.8	411	23.8	411	23.8	345	28.3	345	28.3	346	28.2
401.bzip2	535	18.0	533	18.1	534	18.1	523	18.4	524	18.4	524	18.4
403.gcc	323	24.9	323	24.9	324	24.8	322	25.0	322	25.0	322	25.0
429.mcf	196	46.4	197	46.2	197	46.3	196	46.4	197	46.2	197	46.3
445.gobmk	502	20.9	502	20.9	502	20.9	497	21.1	497	21.1	497	21.1
456.hmmer	218	42.7	219	42.6	218	42.8	213	43.9	213	43.9	213	43.9
458.sjeng	522	23.2	521	23.2	521	23.2	522	23.2	521	23.2	521	23.2
462.libquantum	49.1	422	49.1	422	49.1	422	49.1	422	49.1	422	49.1	422
464.h264ref	551	40.1	552	40.1	545	40.6	497	44.5	500	44.2	508	43.6
471.omnetpp	314	19.9	315	19.8	315	19.9	266	23.5	265	23.5	266	23.5
473.astar	314	22.3	319	22.0	315	22.3	314	22.3	319	22.0	315	22.3
483.xalancbmk	190	36.3	191	36.0	191	36.2	170	40.7	170	40.6	170	40.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Platform Notes

BIOS configuration:
Intel HT Technology = Disable

General Notes

Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/SPECcpu2006/libs/32:/SPECcpu2006/libs/64"
OMP_NUM_THREADS = "2"

Binaries compiled on a system with 1x E3-1270v2 CPU + 32 GB
memory using RHEL6.2
For information about Fujitsu please visit: <http://www.fujitsu.com>

Base Compiler Invocation

C benchmarks:
icc -m64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint2006 = 36.3

PRIMERGY TX140 S1p, Intel Pentium G640, 2.80 GHz

SPECint_base2006 = 34.4

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: May-2012
Hardware Availability: Jun-2012
Software Availability: Feb-2012

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/opt/SmartHeap/lib64 -lsmartheap64

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m64

400.perlbench: icc -m32

445.gobmk: icc -m32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint2006 = 36.3

PRIMERGY TX140 S1p, Intel Pentium G640, 2.80 GHz

SPECint_base2006 = 34.4

CPU2006 license: 19

Test date: May-2012

Test sponsor: Fujitsu

Hardware Availability: Jun-2012

Tested by: Fujitsu

Software Availability: Feb-2012

Peak Compiler Invocation (Continued)

464.h264ref: icc -m32

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

401.bzip2: -DSPEC_CPU_LP64

403.gcc: -DSPEC_CPU_LP64

429.mcf: -DSPEC_CPU_LP64

456.hmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

473.astar: -DSPEC_CPU_LP64

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32
-opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -inline-alloc
-opt-malloc-options=3 -auto-ilp32

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
-ansi-alias

458.sjeng: basepeak = yes

462.libquantum: basepeak = yes

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint2006 = 36.3

PRIMERGY TX140 S1p, Intel Pentium G640, 2.80 GHz

SPECint_base2006 = 34.4

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: May-2012

Hardware Availability: Jun-2012

Software Availability: Feb-2012

Peak Optimization Flags (Continued)

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-ra-region-strategy=block -ansi-alias
-Wl,-z,muldefs -L/opt/SmartHeap/lib -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
-Wl,-z,muldefs -L/opt/SmartHeap/lib -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20120320.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20120320.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 08:36:29 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 19 June 2012.