



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp®2006 = 64.2

IBM System x3530 M4 (Intel Xeon E5-2430)

SPECfp_base2006 = 61.0

CPU2006 license: 11


Test date: Jul-2012

Test sponsor: IBM Corporation

Hardware Availability: May-2012

Tested by: IBM Corporation

Software Availability: Dec-2011

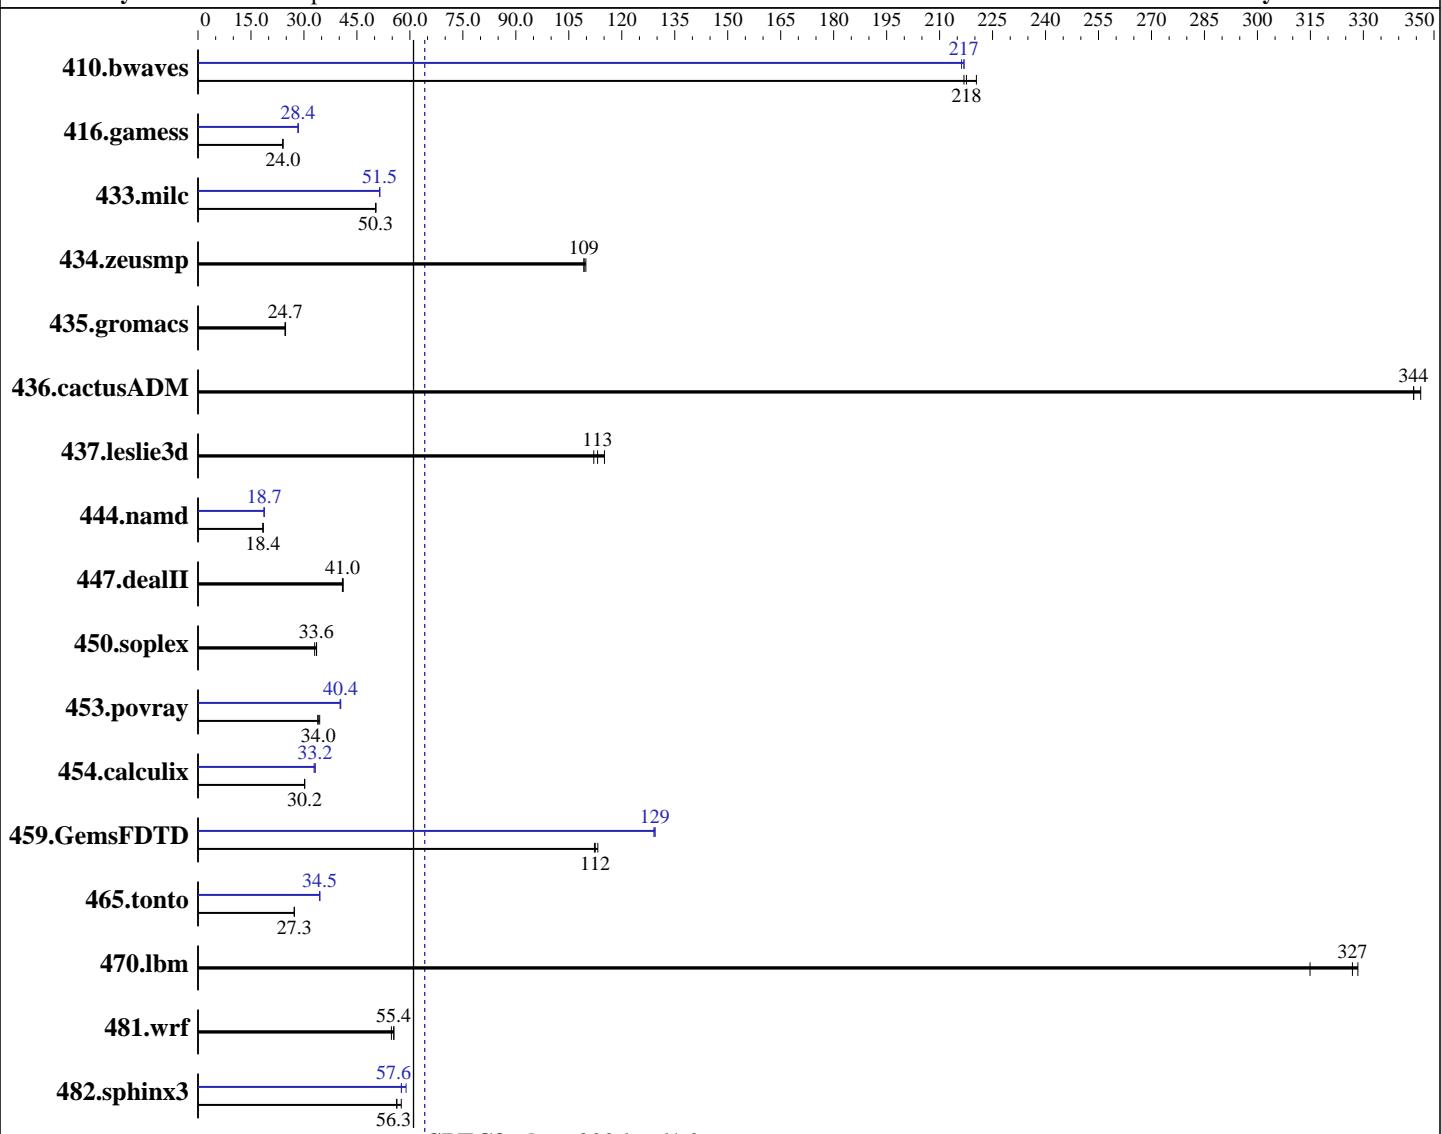

SPECfp_base2006 = 61.0

SPECfp2006 = 64.2

Hardware

CPU Name: Intel Xeon E5-2430
CPU Characteristics: Intel Turbo Boost Technology up to 2.70 GHz
CPU MHz: 2200
FPU: Integrated
CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)
Compiler: 2.6.32-220.el6.x86_64
C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;
Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux
Auto Parallel: Yes
File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3530 M4 (Intel Xeon E5-2430)

SPECfp2006 = 64.2

CPU2006 license: 11

Test date: Jul-2012

Test sponsor: IBM Corporation

Hardware Availability: May-2012

Tested by: IBM Corporation

Software Availability: Dec-2011

L3 Cache: 15 MB I+D on chip per chip
 Other Cache: None
 Memory: 96 GB (12 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1333 MHz)
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	62.7	217	61.7	220	<u>62.5</u>	<u>218</u>	62.9	216	<u>62.7</u>	<u>217</u>	62.7	217
416.gamess	<u>814</u>	<u>24.0</u>	814	24.0	816	24.0	690	28.4	<u>690</u>	<u>28.4</u>	690	28.4
433.milc	182	50.3	<u>182</u>	<u>50.3</u>	182	50.3	178	51.5	<u>178</u>	<u>51.5</u>	178	51.4
434.zeusmp	83.3	109	82.9	110	<u>83.3</u>	<u>109</u>	83.3	109	82.9	110	<u>83.3</u>	<u>109</u>
435.gromacs	288	24.8	289	24.7	<u>289</u>	<u>24.7</u>	288	24.8	289	24.7	<u>289</u>	<u>24.7</u>
436.cactusADM	34.5	346	<u>34.7</u>	<u>344</u>	34.7	344	34.5	346	<u>34.7</u>	<u>344</u>	34.7	344
437.leslie3d	83.9	112	<u>83.1</u>	<u>113</u>	81.7	115	83.9	112	<u>83.1</u>	<u>113</u>	81.7	115
444.namd	436	18.4	<u>435</u>	<u>18.4</u>	435	18.4	428	18.7	<u>428</u>	<u>18.7</u>	428	18.7
447.dealII	278	41.1	<u>279</u>	<u>41.0</u>	280	40.9	278	41.1	<u>279</u>	<u>41.0</u>	280	40.9
450.soplex	248	33.6	<u>249</u>	<u>33.6</u>	252	33.0	248	33.6	<u>249</u>	<u>33.6</u>	252	33.0
453.povray	<u>156</u>	<u>34.0</u>	154	34.5	157	33.9	<u>132</u>	<u>40.4</u>	132	40.4	132	40.2
454.calculix	273	30.2	<u>273</u>	<u>30.2</u>	273	30.2	<u>249</u>	33.2	251	32.9	<u>249</u>	<u>33.2</u>
459.GemsFDTD	<u>94.3</u>	<u>112</u>	93.7	113	94.5	112	82.2	129	82.0	129	<u>82.0</u>	<u>129</u>
465.tonto	360	27.3	361	27.2	<u>360</u>	<u>27.3</u>	285	34.5	286	34.4	<u>285</u>	<u>34.5</u>
470.lbm	43.6	315	<u>42.0</u>	<u>327</u>	41.8	328	43.6	315	<u>42.0</u>	<u>327</u>	41.8	328
481.wrf	204	54.8	201	55.5	<u>202</u>	<u>55.4</u>	204	54.8	201	55.5	<u>202</u>	<u>55.4</u>
482.sphinx3	339	57.6	347	56.2	<u>346</u>	<u>56.3</u>	331	58.9	<u>338</u>	<u>57.6</u>	338	57.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
 Zone reclaim mode enabled with:

```
echo 1 > /proc/sys/vm/zone_reclaim_mode
```

Platform Notes

BIOS setting:

Operating Mode set to Maximum Performance

Sysinfo program /root/SPECcpu-v1.2/config/sysinfo.rev6800

\$Rev: 6800 \$ \$Date::: 2011-10-11 #\\$ 6f2ebdff5032aaa42e583f96b07f99d3
 running on localhost.localdomain Sun Jul 8 06:12:36 2012

This section contains SUT (System Under Test) info as seen by

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 64.2

IBM System x3530 M4 (Intel Xeon E5-2430)

SPECfp_base2006 = 61.0

CPU2006 license: 11

Test date: Jul-2012

Test sponsor: IBM Corporation

Hardware Availability: May-2012

Tested by: IBM Corporation

Software Availability: Dec-2011

Platform Notes (Continued)

some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-2430 0 @ 2.20GHz
        2 "physical id"s (chips)
        24 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The
    following excerpts from /proc/cpuinfo might not be reliable. Use with
    caution.)
        cpu cores : 6
        siblings : 12
        physical 0: cores 0 1 2 3 4 5
        physical 1: cores 0 1 2 3 4 5
    cache size : 15360 KB
```

```
From /proc/meminfo
    MemTotal:      99043000 kB
    HugePages_Total:       0
    Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
    Red Hat Enterprise Linux Server release 6.2 (Santiago)
```

```
From /etc/*release* /etc/*version*
    redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
    system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
    system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
    Linux localhost.localdomain 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13
    EST 2011 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jul 6 16:26
```

```
SPEC is set to: /root/SPECcpu-v1.2
    Filesystem      Type  Size  Used Avail Use% Mounted on
    /dev/mapper/vg_x3530m4-lv_root
        ext4        133G   55G   71G  44%  /
```

Additional information from dmidecode:

```
Memory:
    12x Samsung M393B1K70DH0-CK0 8 GB 1333 MHz 2 rank
```

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,1,0"

LD_LIBRARY_PATH = "/root/SPECcpu-v1.2/libs/32:/root/SPECcpu-v1.2/libs/64"

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 64.2

IBM System x3530 M4 (Intel Xeon E5-2430)

SPECfp_base2006 = 61.0

CPU2006 license: 11

Test date: Jul-2012

Test sponsor: IBM Corporation

Hardware Availability: May-2012

Tested by: IBM Corporation

Software Availability: Dec-2011

General Notes (Continued)

OMP_NUM_THREADS = "12"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 64.2

IBM System x3530 M4 (Intel Xeon E5-2430)

SPECfp_base2006 = 61.0

CPU2006 license: 11

Test date: Jul-2012

Test sponsor: IBM Corporation

Hardware Availability: May-2012

Tested by: IBM Corporation

Software Availability: Dec-2011

Base Optimization Flags (Continued)

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias
```

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias
```

```
470.lbm: basepeak = yes
```

```
482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias  
-parallel
```

C++ benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 64.2

IBM System x3530 M4 (Intel Xeon E5-2430)

SPECfp_base2006 = 61.0

CPU2006 license: 11

Test date: Jul-2012

Test sponsor: IBM Corporation

Hardware Availability: May-2012

Tested by: IBM Corporation

Software Availability: Dec-2011

Peak Optimization Flags (Continued)

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll14 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel
-static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll12
-inline-level=0 -scalar-rep -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll12
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll14

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-SNB-C.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-SNB-C.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 64.2

IBM System x3530 M4 (Intel Xeon E5-2430)

SPECfp_base2006 = 61.0

CPU2006 license: 11

Test date: Jul-2012

Test sponsor: IBM Corporation

Hardware Availability: May-2012

Tested by: IBM Corporation

Software Availability: Dec-2011

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 11:45:39 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 31 July 2012.