



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Huawei

SPECfp®2006 = **66.5**

Huawei DH310 V2 (Intel Xeon E3-1220 v2)

SPECfp\_base2006 = **64.7**

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Jul-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

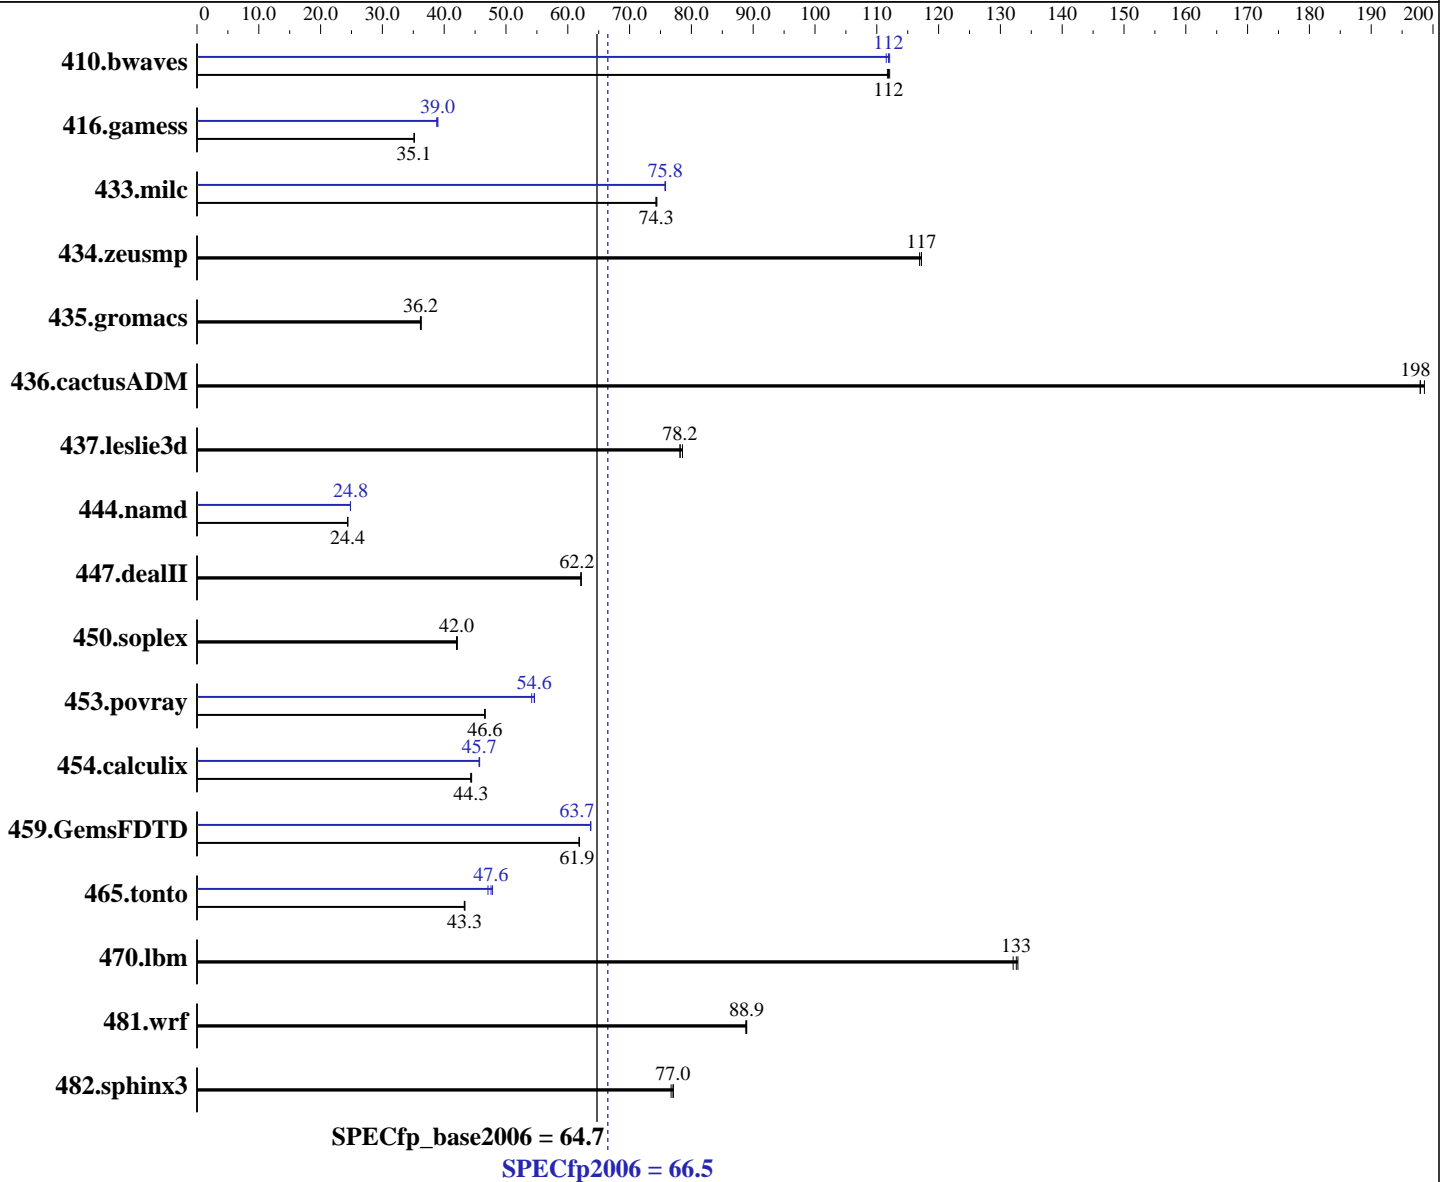

### Hardware

CPU Name: Intel Xeon E3-1220 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.50 GHz  
 CPU MHz: 3100  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
 2.6.32-220.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;  
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Huawei

SPECfp2006 = **66.5**

## Huawei DH310 V2 (Intel Xeon E3-1220 v2)

SPECfp\_base2006 = **64.7**

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jul-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

L3 Cache: 8 MB I+D on chip per chip  
Other Cache: None  
Memory: 16 GB (2 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
Disk Subsystem: 1 x 300 GB SAS, 10K RPM  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	<b><u>121</u></b>	<b><u>112</u></b>	121	112	122	112	121	112	122	112	<b><u>121</u></b>	<b><u>112</u></b>
416.gamess	557	35.2	557	35.1	<b><u>557</u></b>	<b><u>35.1</u></b>	505	38.8	<b><u>503</u></b>	<b><u>39.0</u></b>	503	39.0
433.milc	<b><u>124</u></b>	<b><u>74.3</u></b>	123	74.4	124	74.3	121	75.8	<b><u>121</u></b>	<b><u>75.8</u></b>	121	75.7
434.zeusmp	77.6	117	77.8	117	<b><u>77.6</u></b>	<b><u>117</u></b>	77.6	117	77.8	117	<b><u>77.6</u></b>	<b><u>117</u></b>
435.gromacs	<b><u>197</u></b>	<b><u>36.2</u></b>	197	36.3	198	36.1	<b><u>197</u></b>	<b><u>36.2</u></b>	197	36.3	198	36.1
436.cactusADM	<b><u>60.4</u></b>	<b><u>198</u></b>	60.2	199	60.4	198	<b><u>60.4</u></b>	<b><u>198</u></b>	60.2	199	60.4	198
437.leslie3d	120	78.6	120	78.2	<b><u>120</u></b>	<b><u>78.2</u></b>	120	78.6	120	78.2	<b><u>120</u></b>	<b><u>78.2</u></b>
444.namd	<b><u>329</u></b>	<b><u>24.4</u></b>	329	24.4	329	24.4	<b><u>323</u></b>	<b><u>24.8</u></b>	323	24.8	323	24.8
447.dealII	184	62.1	<b><u>184</u></b>	<b><u>62.2</u></b>	184	62.2	184	62.1	<b><u>184</u></b>	<b><u>62.2</u></b>	184	62.2
450.soplex	<b><u>198</u></b>	<b><u>42.0</u></b>	199	42.0	198	42.1	<b><u>198</u></b>	<b><u>42.0</u></b>	199	42.0	198	42.1
453.povray	<b><u>114</u></b>	<b><u>46.6</u></b>	114	46.5	114	46.6	97.4	54.6	<b><u>97.5</u></b>	<b><u>54.6</u></b>	98.2	54.2
454.calculix	<b><u>186</u></b>	<b><u>44.3</u></b>	186	44.4	186	44.3	<b><u>181</u></b>	<b><u>45.7</u></b>	180	45.7	181	45.6
459.GemsFDTD	171	61.9	172	61.8	<b><u>171</u></b>	<b><u>61.9</u></b>	<b><u>167</u></b>	<b><u>63.7</u></b>	167	63.7	167	63.7
465.tonto	227	43.4	<b><u>227</u></b>	<b><u>43.3</u></b>	228	43.2	206	47.8	209	47.1	<b><u>207</u></b>	<b><u>47.6</u></b>
470.lbm	104	132	103	133	<b><u>104</u></b>	<b><u>133</u></b>	104	132	103	133	<b><u>104</u></b>	<b><u>133</u></b>
481.wrf	126	88.8	<b><u>126</u></b>	<b><u>88.9</u></b>	126	88.9	126	88.8	<b><u>126</u></b>	<b><u>88.9</u></b>	126	88.9
482.sphinx3	253	77.1	254	76.7	<b><u>253</u></b>	<b><u>77.0</u></b>	253	77.1	254	76.7	<b><u>253</u></b>	<b><u>77.0</u></b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
Select only test related files when installing the operating system

## Platform Notes

BIOS configuration:  
Set Power Efficiency Mode to Performance  
Sysinfo program /spec/config/sysinfo.rev6800  
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3  
running on RH62-com Wed Jul 11 18:44:30 2012

This section contains SUT (System Under Test) info as seen by  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 66.5

Huawei DH310 V2 (Intel Xeon E3-1220 v2)

SPECfp\_base2006 = 64.7

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jul-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

## Platform Notes (Continued)

some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E3-1220 V2 @ 3.10GHz

1 "physical id"s (chips)

4 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 4

siblings : 4

physical 0: cores 0 1 2 3

cache size : 8192 KB

From /proc/meminfo

MemTotal: 16302876 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

From /etc/\*release\* /etc/\*version\*

redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)

system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)

system-release-cpe: cpe:/o:redhat:enterprise\_linux:6server:ga:server

uname -a:

Linux RH62-com 2.6.32-220.el6.x86\_64 #1 SMP Wed Nov 9 08:03:13 EST 2011  
x86\_64 x86\_64 x86\_64 GNU/Linux

run-level 3 Jul 10 20:05

SPEC is set to: /spec

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sdal	ext4	289G	49G	226G	18%	/

Additional information from dmidecode:

Memory:

2x Samsung M391B1G73BH0-CK0 8 GB 1600 MHz 2 rank

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,0,1"

LD\_LIBRARY\_PATH = "/spec/libs/32:/spec/libs/64"

OMP\_NUM\_THREADS = "4"

Binaries compiled on a system with 2 x Xeon X5645 CPU + 16GB memory  
using RHEL 6.1



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 66.5

Huawei DH310 V2 (Intel Xeon E3-1220 v2)

SPECfp\_base2006 = 64.7

CPU2006 license: 3175  
Test sponsor: Huawei  
Tested by: Huawei

Test date: Jul-2012  
Hardware Availability: May-2012  
Software Availability: Dec-2011

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

C++ benchmarks:  
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Fortran benchmarks:  
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:  
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

<b>Huawei</b>	<b>SPECfp2006 =</b>	<b>66.5</b>
<b>Huawei DH310 V2 (Intel Xeon E3-1220 v2)</b>	<b>SPECfp_base2006 =</b>	<b>64.7</b>
<b>CPU2006 license:</b> 3175	<b>Test date:</b>	Jul-2012
<b>Test sponsor:</b> Huawei	<b>Hardware Availability:</b>	May-2012
<b>Tested by:</b> Huawei	<b>Software Availability:</b>	Dec-2011

## Peak Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel  
-static

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 66.5

Huawei DH310 V2 (Intel Xeon E3-1220 v2)

SPECfp\_base2006 = 64.7

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jul-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

## Peak Optimization Flags (Continued)

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revE.20120703.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revE.20120703.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 11:42:53 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 31 July 2012.