



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

BladeSymphony BS320 (Intel Xeon E5-2440)

SPECfp®2006 = 69.2

SPECfp_base2006 = 66.5

CPU2006 license: 35


Test sponsor: HITACHI

Tested by: HITACHI

Test date: Jul-2012

Hardware Availability: Jun-2012

Software Availability: Feb-2012

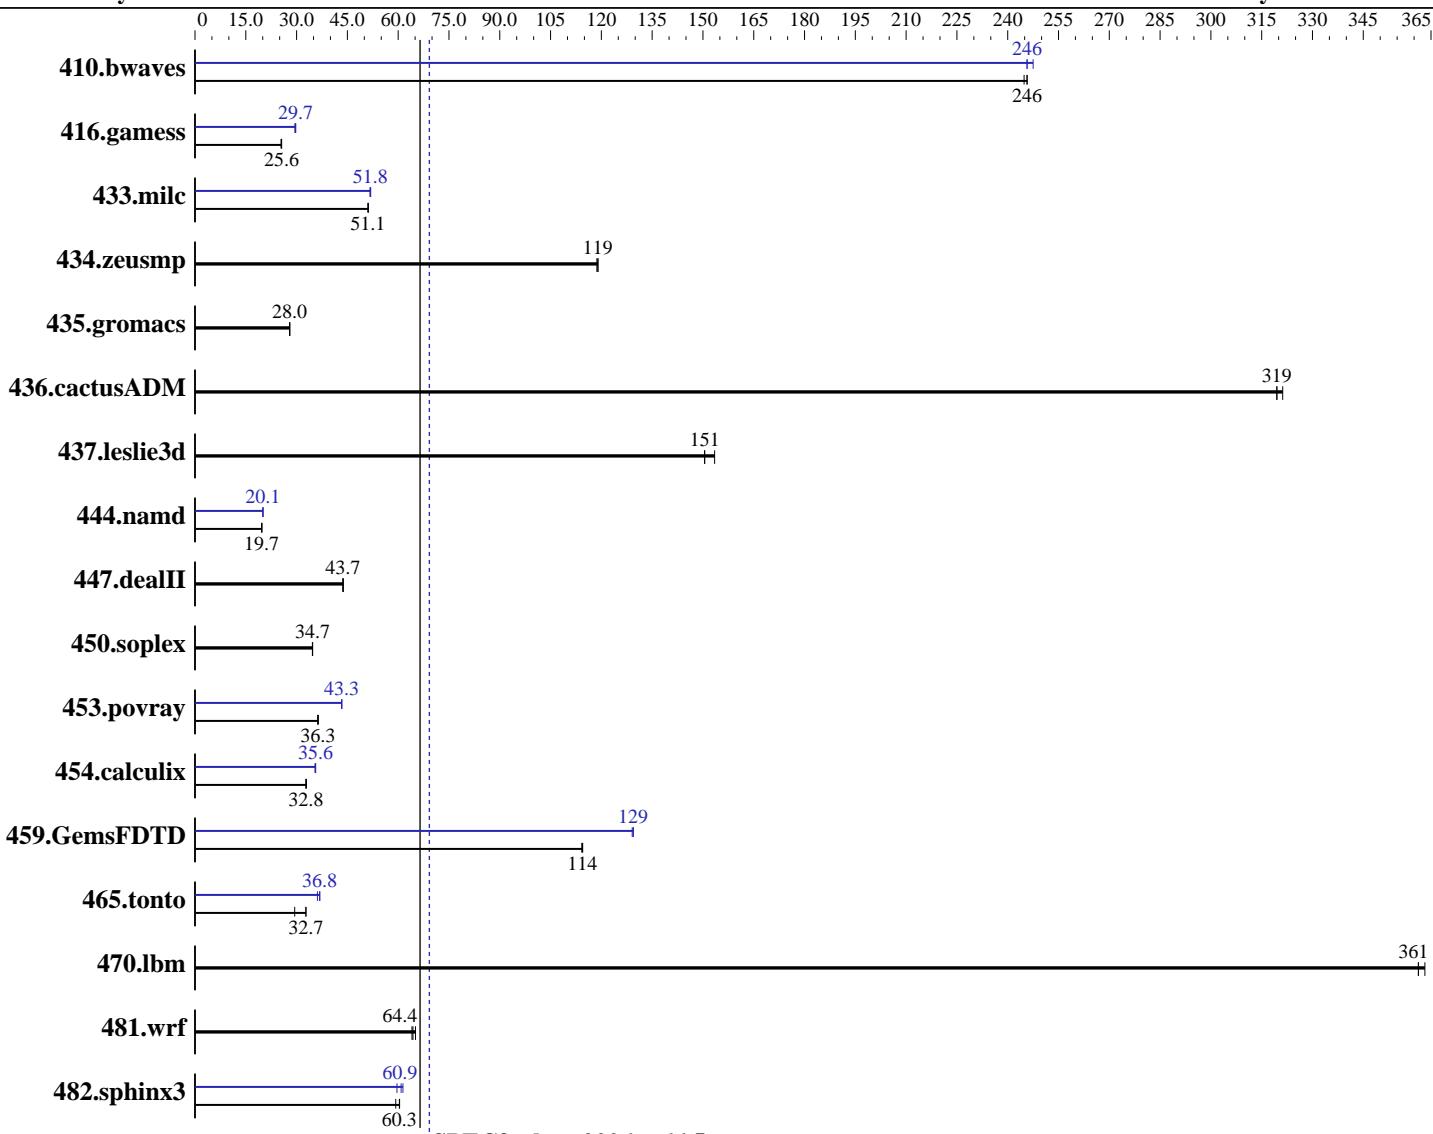

Hardware

CPU Name: Intel Xeon E5-2440
 CPU Characteristics: Intel Turbo Boost Technology up to 2.90 GHz
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1, 2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: Red Hat Enterprise Linux Server release 6.2, Kernel 2.6.32-220.4.2.el6.x86_64
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux
 Auto Parallel: Yes
 File System: ext4
 System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

BladeSymphony BS320 (Intel Xeon E5-2440)

SPECfp2006 = 69.2

CPU2006 license: 35

Test date: Jul-2012

Test sponsor: HITACHI

Hardware Availability: Jun-2012

Tested by: HITACHI

Software Availability: Feb-2012

L3 Cache: 15 MB I+D on chip per chip
 Other Cache: None
 Memory: 96 GB (12 x 8 GB 2Rx4 PC3L-10600R-9, ECC)
 Disk Subsystem: 2 x 147 GB SAS, 15000 RPM RAID1 configuration
 Other Hardware: None

Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	55.3	246	55.3	246	55.5	245	55.3	246	55.3	246	54.9	248
416.gamess	771	25.4	766	25.6	766	25.6	660	29.7	658	29.8	664	29.5
433.milc	180	51.1	180	51.1	179	51.1	177	51.8	177	51.9	178	51.7
434.zeusmp	76.7	119	76.5	119	76.5	119	76.7	119	76.5	119	76.5	119
435.gromacs	255	28.0	255	28.0	256	27.9	255	28.0	255	28.0	256	27.9
436.cactusADM	37.2	321	37.4	319	37.4	319	37.2	321	37.4	319	37.4	319
437.leslie3d	62.5	151	61.3	153	62.5	151	62.5	151	61.3	153	62.5	151
444.namd	406	19.7	407	19.7	407	19.7	400	20.1	400	20.1	400	20.1
447.dealII	261	43.8	262	43.7	262	43.7	261	43.8	262	43.7	262	43.7
450.soplex	241	34.7	240	34.7	240	34.7	241	34.7	240	34.7	240	34.7
453.povray	147	36.3	147	36.3	146	36.4	123	43.3	123	43.3	123	43.3
454.calculix	251	32.9	252	32.8	252	32.8	232	35.6	233	35.4	232	35.6
459.GemsFDTD	92.9	114	92.7	114	92.7	114	82.2	129	82.0	129	82.0	129
465.tonto	334	29.4	301	32.7	300	32.8	267	36.8	267	36.9	272	36.2
470.lbm	37.8	363	38.0	361	38.0	361	37.8	363	38.0	361	38.0	361
481.wrf	174	64.4	172	65.1	174	64.1	174	64.4	172	65.1	174	64.1
482.sphinx3	323	60.4	329	59.3	323	60.3	320	60.9	327	59.6	317	61.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

```
Sysinfo program /home/cpu2006/config/sysinfo.rev6800
$Rev: 6800 $ $Date:: 2011-10-11 #$
running on localhost.localdomain Fri Jul 13 12:03:19 2012
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2440 0 @ 2.40GHz
Continued on next page
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

BladeSymphony BS320 (Intel Xeon E5-2440)

SPECfp2006 =

69.2

SPECfp_base2006 =

66.5

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date:

Jul-2012

Hardware Availability:

Jun-2012

Software Availability:

Feb-2012

Platform Notes (Continued)

```
2 "physical id"s (chips)
24 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 6
    siblings   : 12
    physical 0: cores 0 1 2 3 4 5
    physical 1: cores 0 1 2 3 4 5
cache size : 15360 KB

From /proc/meminfo
MemTotal:      99009112 kB
HugePages_Total:       0
Hugepagesize:     2048 kB

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.2 (Santiago)

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
Linux localhost.localdomain 2.6.32-220.4.2.el6.x86_64 #1 SMP Mon Feb 6
16:39:28 EST 2012 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Jul 13 09:57

(End of data from sysinfo program)
```

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,1,0"

LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64"

OMP_NUM_THREADS = "12"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RHEL5.5

Transparent Huge Pages disabled with:

echo never > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:

icc -m64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

BladeSymphony BS320 (Intel Xeon E5-2440)

SPECfp2006 =

69.2

SPECfp_base2006 =

66.5

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date:

Jul-2012

Hardware Availability:

Jun-2012

Software Availability:

Feb-2012

Base Compiler Invocation (Continued)

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

BladeSymphony BS320 (Intel Xeon E5-2440)

SPECfp2006 = 69.2

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Jul-2012

Hardware Availability: Jun-2012

Software Availability: Feb-2012

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll12 -ansi-alias
-parallel

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll14 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel
-static

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

BladeSymphony BS320 (Intel Xeon E5-2440)

SPECfp2006 = 69.2

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Jul-2012

Hardware Availability: Jun-2012

Software Availability: Feb-2012

Peak Optimization Flags (Continued)

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/PlatformHitachi-V1.2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/PlatformHitachi-V1.2.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 11:34:56 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 31 July 2012.