



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp[®]2006 = 44.8

Cisco UCS C22 M3 (Intel Xeon E5-2403, 1.80 GHz)

SPECfp_base2006 = 43.4

CPU2006 license: 9019


Test date: Aug-2012

Test sponsor: Cisco Systems

Hardware Availability: Aug-2012

Tested by: Cisco Systems

Software Availability: Feb-2012

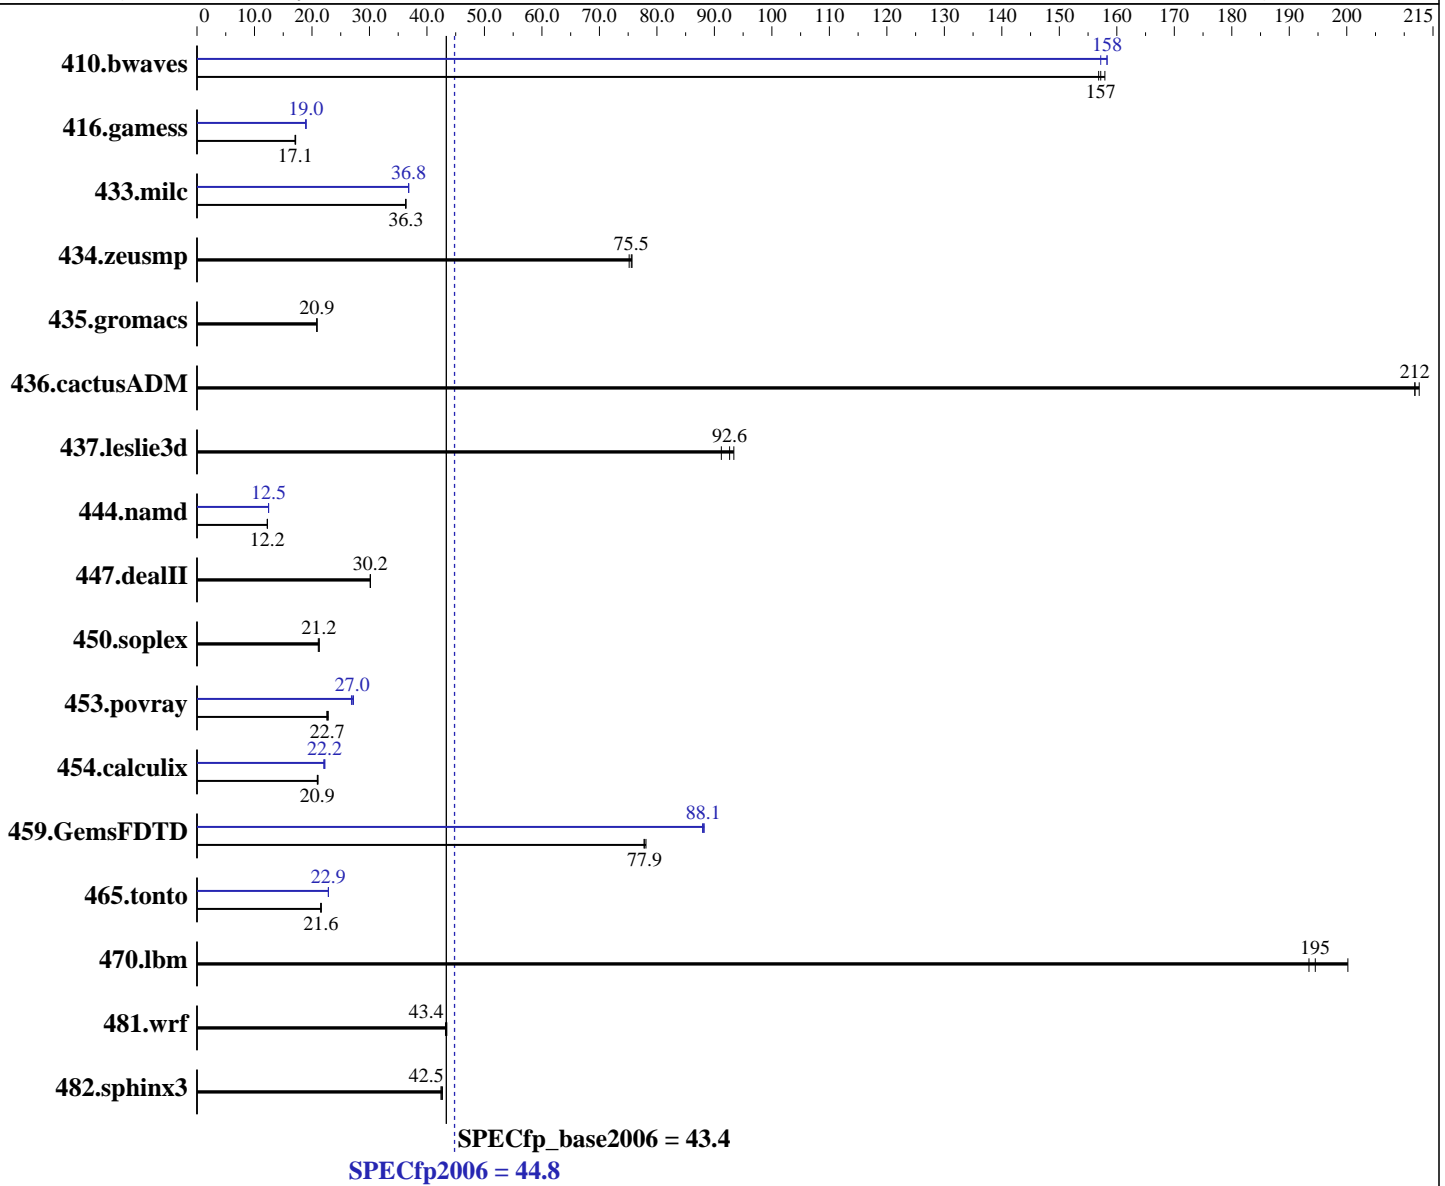

Hardware	
CPU Name:	Intel Xeon E5-2403
CPU Characteristics:	
CPU MHz:	1800
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Software	
Operating System:	Red Hat Enterprise Linux Server release 6.2 (Santiago)
Compiler:	2.6.32-220.el6.x86_64 C/C++: Version 12.1.3.293 of Intel C++ Studio XE for Linux; Fortran: Version 12.1.3.293 of Intel Fortran Studio XE for Linux
Auto Parallel:	Yes
File System:	ext4

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp2006 = **44.8**

Cisco UCS C22 M3 (Intel Xeon E5-2403, 1.80 GHz)

SPECfp_base2006 = **43.4**

CPU2006 license: 9019

Test date: Aug-2012

Test sponsor: Cisco Systems

Hardware Availability: Aug-2012

Tested by: Cisco Systems

Software Availability: Feb-2012

L3 Cache: 10 MB I+D on chip per chip
 Other Cache: None
 Memory: 96 GB (12 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1066 MHz and CL9)
 Disk Subsystem: 146 GB 15000 RPM SAS
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	86.1	158	86.4	157	86.6	157	85.8	158	86.4	157	85.8	158
416.gamess	1144	17.1	1141	17.2	1148	17.1	1033	19.0	1036	18.9	1032	19.0
433.milc	253	36.3	253	36.3	253	36.3	249	36.8	249	36.8	249	36.8
434.zeusmp	121	75.2	120	75.7	120	75.5	121	75.2	120	75.7	120	75.5
435.gromacs	342	20.9	342	20.9	342	20.9	342	20.9	342	20.9	342	20.9
436.cactusADM	56.4	212	56.2	213	56.4	212	56.4	212	56.2	213	56.4	212
437.leslie3d	103	91.2	101	92.6	101	93.4	103	91.2	101	92.6	101	93.4
444.namd	655	12.2	655	12.2	655	12.2	644	12.5	644	12.5	645	12.4
447.dealII	379	30.1	379	30.2	379	30.2	379	30.1	379	30.2	379	30.2
450.soplex	393	21.2	392	21.3	395	21.1	393	21.2	392	21.3	395	21.1
453.povray	233	22.8	234	22.7	236	22.6	197	27.0	195	27.2	198	26.9
454.calculix	394	20.9	392	21.1	394	20.9	374	22.1	371	22.2	372	22.2
459.GemsFDTD	136	77.9	136	77.8	136	78.1	120	88.1	121	87.9	120	88.2
465.tonto	455	21.6	457	21.5	456	21.6	430	22.9	430	22.9	431	22.8
470.lbm	68.6	200	70.6	195	71.0	193	68.6	200	70.6	195	71.0	193
481.wrf	258	43.2	257	43.5	258	43.4	258	43.2	257	43.5	258	43.4
482.sphinx3	456	42.7	459	42.5	459	42.5	456	42.7	459	42.5	459	42.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6800
 \$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3
 running on localhost.localdomain Thu Aug 2 04:02:15 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp2006 = 44.8

Cisco UCS C22 M3 (Intel Xeon E5-2403, 1.80 GHz)

SPECfp_base2006 = 43.4

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Aug-2012

Hardware Availability: Aug-2012

Software Availability: Feb-2012

Platform Notes (Continued)

model name : Intel(R) Xeon(R) CPU E5-2403 0 @ 1.80GHz

2 "physical id"s (chips)

8 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 4

siblings : 4

physical 0: cores 0 1 2 3

physical 1: cores 0 1 2 3

cache size : 10240 KB

From /proc/meminfo

MemTotal: 99042964 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

/usr/bin/lsb_release -d

Red Hat Enterprise Linux Server release 6.2 (Santiago)

From /etc/*release* /etc/*version*

redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)

system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)

system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:

Linux localhost.localdomain 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Aug 1 18:13

SPEC is set to: /opt/cpu2006-1.2

Filesystem Type Size Used Avail Use% Mounted on

/dev/sdal ext4 134G 10G 118G 8% /

Additional information from dmidecode:

Memory:

12x 0xCE00 M393B1K70DH0-YK0 8 GB 1600 MHz 2 rank

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,1,0"

LD_LIBRARY_PATH = "/opt/cpu2006-1.2/libs/32:/opt/cpu2006-1.2/libs/64"

OMP_NUM_THREADS = "8"

Binaries compiled on a system with 2 X Intel Xeon E5-2690 CPU + 128 GB memory using RHEL 6.2

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Filesystem page cache cleared with:

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 3



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp2006 = 44.8

Cisco UCS C22 M3 (Intel Xeon E5-2403, 1.80 GHz)

SPECfp_base2006 = 43.4

CPU2006 license: 9019

Test date: Aug-2012

Test sponsor: Cisco Systems

Hardware Availability: Aug-2012

Tested by: Cisco Systems

Software Availability: Feb-2012

General Notes (Continued)

```
echo 1> /proc/sys/vm/drop_caches
```

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias
```

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp2006 = 44.8

Cisco UCS C22 M3 (Intel Xeon E5-2403, 1.80 GHz)

SPECfp_base2006 = 43.4

CPU2006 license: 9019

Test date: Aug-2012

Test sponsor: Cisco Systems

Hardware Availability: Aug-2012

Tested by: Cisco Systems

Software Availability: Feb-2012

Base Optimization Flags (Continued)

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp2006 = 44.8

Cisco UCS C22 M3 (Intel Xeon E5-2403, 1.80 GHz)

SPECfp_base2006 = 43.4

CPU2006 license: 9019

Test date: Aug-2012

Test sponsor: Cisco Systems

Hardware Availability: Aug-2012

Tested by: Cisco Systems

Software Availability: Feb-2012

Peak Optimization Flags (Continued)

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel
-static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp2006 = 44.8

Cisco UCS C22 M3 (Intel Xeon E5-2403, 1.80 GHz)

SPECfp_base2006 = 43.4

CPU2006 license: 9019

Test date: Aug-2012

Test sponsor: Cisco Systems

Hardware Availability: Aug-2012

Tested by: Cisco Systems

Software Availability: Feb-2012

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 09:33:30 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 14 September 2012.