



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server 1012G-MTF  
(H8SGL-F, AMD Opteron 6386 SE)

SPECfp<sup>®</sup>\_rate2006 = 223

SPECfp\_rate\_base2006 = 199

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Sep-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

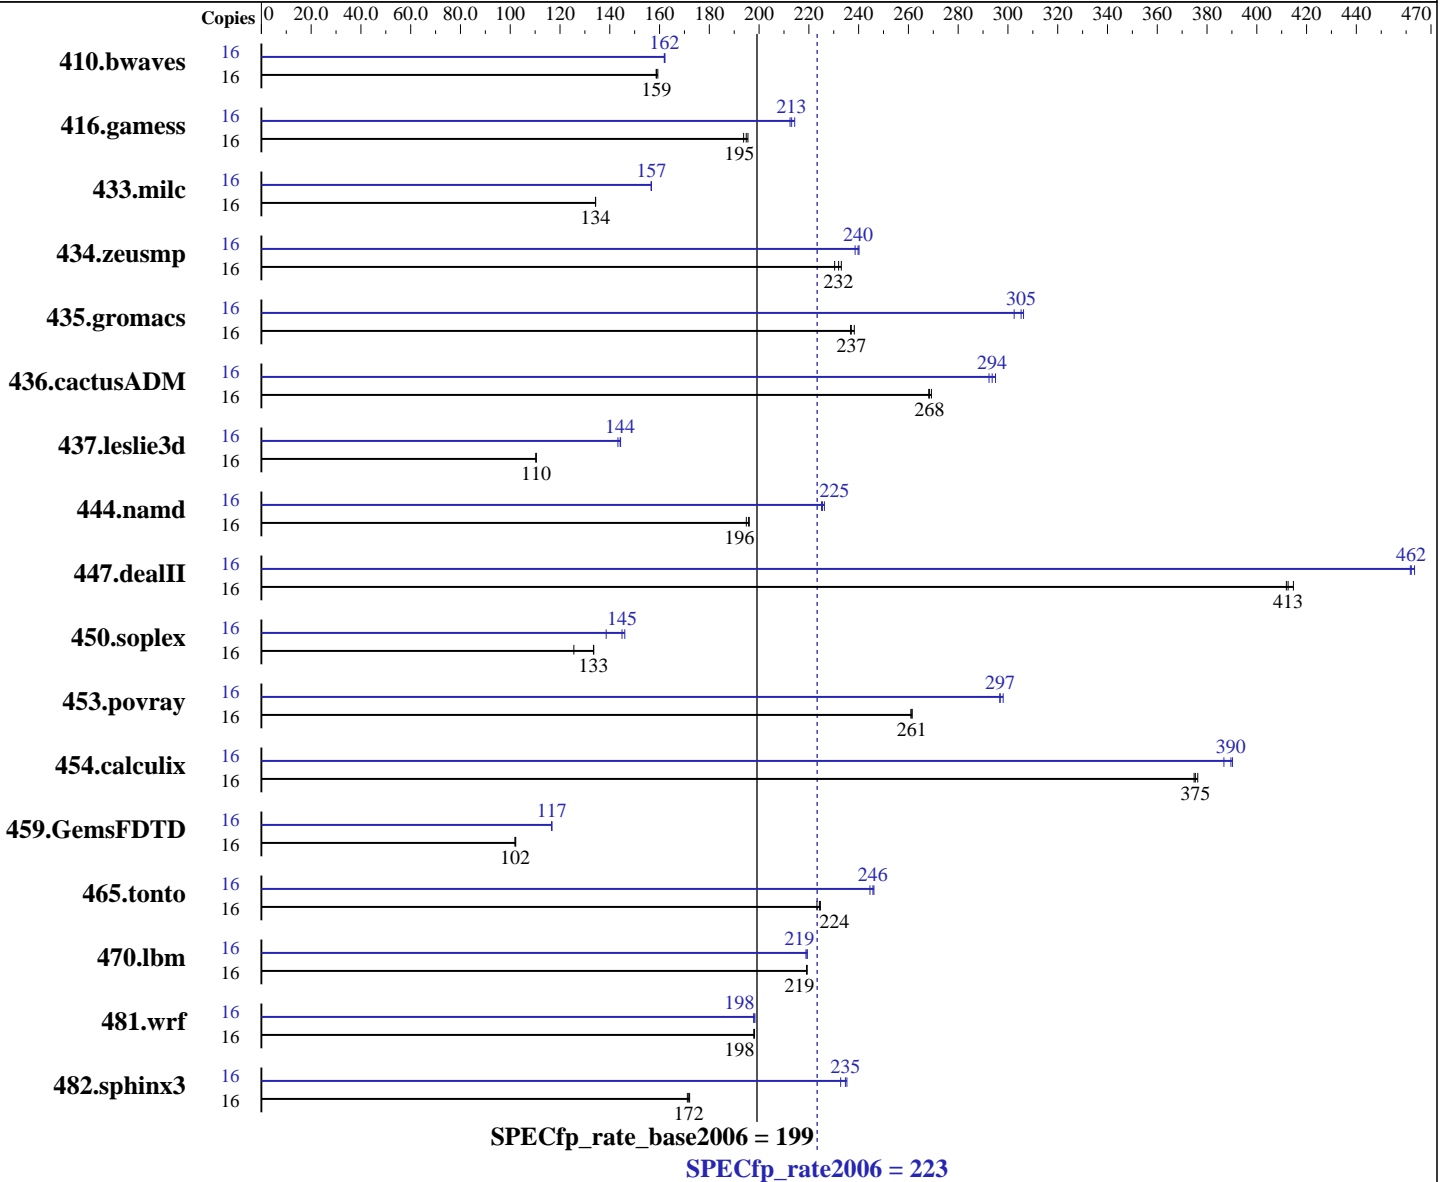

### Hardware

CPU Name: AMD Opteron 6386 SE  
 CPU Characteristics: AMD Turbo CORE technology up to 3.50 GHz  
 CPU MHz: 2800  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 1 chip, 16 cores/chip  
 CPU(s) orderable: 1 chip

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.3,  
Kernel 2.6.32-279.el6.x86\_64  
 Compiler: C/C++/Fortran: Version 4.5.2 of x86 Open64  
Compiler Suite (from AMD)  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server 1012G-MTF  
(H8SGL-F, AMD Opteron 6386 SE)

SPECfp\_rate2006 = 223

SPECfp\_rate\_base2006 = 199

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Sep-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

Primary Cache: 512 KB I on chip per chip,  
64 KB I shared / 2 cores;  
16 KB D on chip per core

Secondary Cache: 16 MB I+D on chip per chip, 2 MB shared / 2 cores

L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 8 cores

Other Cache: None

Memory: 64 GB (8 x 8 GB 2Rx4 PC3-12800R-11, ECC)

Disk Subsystem: 1 x 2048 GB SATA, 7200 RPM

Other Hardware: None

Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	<b>1369</b>	<b>159</b>	1371	159	1365	159	16	1341	162	1343	162	<b>1342</b>	<b>162</b>
416.gamess	16	1617	194	1602	196	<b>1608</b>	<b>195</b>	16	1462	214	1475	212	<b>1470</b>	<b>213</b>
433.milc	16	<b>1094</b>	<b>134</b>	1093	134	1094	134	16	937	157	938	157	<b>937</b>	<b>157</b>
434.zeusmp	16	625	233	<b>628</b>	<b>232</b>	632	230	16	610	239	606	240	<b>607</b>	<b>240</b>
435.gromacs	16	483	237	479	238	<b>482</b>	<b>237</b>	16	373	306	<b>374</b>	<b>305</b>	378	302
436.cactusADM	16	<b>712</b>	<b>268</b>	713	268	710	269	16	648	295	<b>651</b>	<b>294</b>	654	292
437.leslie3d	16	1362	110	<b>1362</b>	<b>110</b>	1363	110	16	1050	143	<b>1043</b>	<b>144</b>	1042	144
444.namd	16	658	195	655	196	<b>655</b>	<b>196</b>	16	570	225	<b>569</b>	<b>225</b>	567	226
447.dealII	16	<b>444</b>	<b>413</b>	444	412	441	415	16	395	463	<b>396</b>	<b>462</b>	396	462
450.soplex	16	1063	126	999	134	<b>1000</b>	<b>133</b>	16	963	139	<b>921</b>	<b>145</b>	914	146
453.povray	16	326	261	<b>326</b>	<b>261</b>	326	261	16	286	298	<b>287</b>	<b>297</b>	287	297
454.calculix	16	351	376	<b>352</b>	<b>375</b>	352	375	16	341	387	<b>339</b>	<b>390</b>	338	390
459.GemsFDTD	16	1665	102	<b>1664</b>	<b>102</b>	1661	102	16	1455	117	<b>1455</b>	<b>117</b>	1454	117
465.tonto	16	<b>702</b>	<b>224</b>	705	223	701	225	16	644	245	640	246	<b>641</b>	<b>246</b>
470.lbm	16	<b>1003</b>	<b>219</b>	1003	219	1002	219	16	1002	219	<b>1003</b>	<b>219</b>	1005	219
481.wrf	16	<b>903</b>	<b>198</b>	903	198	903	198	16	<b>903</b>	<b>198</b>	901	198	904	198
482.sphinx3	16	1822	171	1812	172	<b>1816</b>	<b>172</b>	16	1325	235	<b>1329</b>	<b>235</b>	1340	233

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set transparent\_hugepage=never as a boot parameter in /boot/grub/menu.lst  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server 1012G-MTF  
(H8SGL-F, AMD Opteron 6386 SE)

SPECfp\_rate2006 = 223

SPECfp\_rate\_base2006 = 199

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Sep-2012  
Hardware Availability: Nov-2012  
Software Availability: Aug-2012

## Operating System Notes (Continued)

```
Set vm/nr_hugepages=14336 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

## General Notes

Environment variables set by runspec before the start of the run:

```
HUGETLB_LIMIT = "896"
```

```
LD_LIBRARY_PATH = "/usr/cpu2006/amd1206-rate-libs-revA/32:/usr/cpu2006/amd1206-rate-libs-revA/64"
```

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6386SE chips + 128GB Memory using RHEL 6.3

## Base Compiler Invocation

C benchmarks:  
opencc

C++ benchmarks:  
openCC

Fortran benchmarks:  
openf95

Benchmarks using both Fortran and C:  
opencc openf95

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server 1012G-MTF  
(H8SGL-F, AMD Opteron 6386 SE)

SPECfp\_rate2006 = 223

SPECfp\_rate\_base2006 = 199

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Sep-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

## Base Portability Flags (Continued)

481.wrf: -DSPEC\_CPU\_LINUX -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LP64  
-fno-second-underscore  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

### C benchmarks:

-Ofast -OPT:malloc\_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000  
-IPA:small\_pu=100 -mso -march=bdver1

### C++ benchmarks:

-Ofast -static -CG:load\_exe=0 -OPT:malloc\_alg=1 -INLINE:aggressive=on  
-HP:bd=2m:heap=2m -D\_\_OPEN64\_FAST\_SET -march=bdver1

### Fortran benchmarks:

-Ofast -LNO:blocking=off -LNO:simd\_peel\_align=on -OPT:rsqrt=2  
-OPT:unroll\_size=256 -HP:bd=2m:heap=2m -mso -march=bdver1

### Benchmarks using both Fortran and C:

-Ofast -OPT:malloc\_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000  
-IPA:small\_pu=100 -mso -march=bdver1 -LNO:blocking=off  
-LNO:simd\_peel\_align=on -OPT:rsqrt=2 -OPT:unroll\_size=256

## Peak Compiler Invocation

### C benchmarks:

opencc

### C++ benchmarks:

openCC

### Fortran benchmarks:

openf95

### Benchmarks using both Fortran and C:

opencc openf95

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server 1012G-MTF  
(H8SGL-F, AMD Opteron 6386 SE)

SPECfp\_rate2006 = 223

SPECfp\_rate\_base2006 = 199

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Sep-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

## Peak Portability Flags (Continued)

435.gromacs: -DSPEC\_CPU\_LP64  
 436.cactusADM: -DSPEC\_CPU\_LP64 -fno-second-underscore  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LINUX -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LP64  
 -fno-second-underscore

## Peak Optimization Flags

C benchmarks:

433.milc: -Ofast -CG:movnti=1 -CG:locs\_best=on -HP:bdt=2m:heap=2m  
 -IPA:plimit=7000 -IPA:callee\_limit=1200  
 -OPT:struct\_array\_copy=2 -OPT:alias=field\_sensitive -mso  
 -march=bdver1

470.lbm: -Ofast -CG:cmp\_peep=on -OPT:keep\_ext=on -HP:bdt=2m:heap=2m  
 -IPA:plimit=8000 -IPA:small\_pu=100 -march=bdver1 -mso

482.sphinx3: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
 -m32 -IPA:plimit=1000 -OPT:malloc\_alg=2 -CG:cmp\_peep=on  
 -CG:p2align=0 -CG:load\_exe=1 -CG:dsched=on  
 -INLINE:aggressive=on -LNO:prefetch=2 -LNO:prefetch\_ahead=4  
 -mso -march=bdver2

C++ benchmarks:

444.namd: -Ofast -IPA:plimit=3000 -LNO:ignore\_feedback=off  
 -CG:local\_sched\_alg=0 -CG:load\_exe=0 -OPT:unroll\_size=256  
 -fno-exceptions -HP:bdt=2m:heap=2m -LNO:if\_select\_conv=1  
 -OPT:alias=disjoint -LNO:psimd\_iso\_unroll=ON -march=bdver1

447.dealIII: -Ofast -D\_\_OPEN64\_FAST\_SET -static -INLINE:aggressive=on  
 -LNO:opt=1 -LNO:simd=2 -fno-emit-exceptions -m32  
 -OPT:unroll\_times\_max=8 -OPT:unroll\_size=256  
 -OPT:unroll\_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on  
 -CG:cmp\_peep=on -CG:movext\_icmp=off -TENV:frame\_pointer=off  
 -march=bdver1

450.soplex: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O3  
 -LNO:ignore\_feedback=off -INLINE:aggressive=on -OPT:RO=1  
 -OPT:IEEE\_arith=3 -OPT:IEEE\_NaN\_Inf=off  
 -OPT:fold\_unsigned\_relops=on -fno-exceptions -CG:p2align=0  
 -m32 -mno-fma4 -HP:bdt=2m:heap=2m -WOPT:sib=on

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server 1012G-MTF  
(H8SGL-F, AMD Opteron 6386 SE)

SPECfp\_rate2006 = 223

SPECfp\_rate\_base2006 = 199

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Sep-2012  
Hardware Availability: Nov-2012  
Software Availability: Aug-2012

## Peak Optimization Flags (Continued)

450.soplex (continued):

-march=bdver1

453.povray: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
-CG:pre\_local\_sched=off -CG:p2align=0 -CG:p2align\_split=on  
-CG:dsched=on -INLINE:aggressive=on -HP:bd=2m:heap=2m  
-OPT:transform=2 -OPT:alias=disjoint -WOPT:aggcm=0  
-march=bdver2

Fortran benchmarks:

410.bwaves: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
-OPT:Ofast -OPT:treeheight=on -LNO:blocking=off  
-LNO:ignore\_feedback=off -LNO:fu=4 -LNO:loop\_model\_simd=on  
-LNO:simd\_rm\_unity\_remainder=on -WOPT:aggstr=0  
-HP:bd=2m:heap=2m -CG:cmp\_peep=on -march=bdver1

416.gamess: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
-LNO:fu=6 -LNO:blocking=0 -LNO:simd=2 -OPT:ro=3  
-OPT:recip=on -CG:local\_sched\_alg=1 -HP:bd=2m:heap=2m  
-WOPT:sib=on -march=bdver1

434.zeusmp: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
-LNO:blocking=off -LNO:interchange=off -IPA:plimit=1500  
-HP:bd=2m:heap=2m -march=bdver1

437.leslie3d: -Ofast -CG:pre\_minreg\_level=2 -LNO:simd=0 -LNO:fusion=2  
-HP:bd=2m:heap=2m -mso -march=bdver1

459.GemsFDTD: -Ofast -IPA:plimit=1500 -OPT:unroll\_size=1024  
-OPT:unroll\_times\_max=16 -LNO:fission=2  
-CG:local\_sched\_alg=2 -HP -march=bdver1

465.tonto: -Ofast -OPT:alias=no\_f90\_pointer\_alias -LNO:blocking=off  
-CG:load\_exe=1 -CG:local\_sched\_alg=3 -IPA:plimit=525  
-HP:bd=2m:heap=2m -march=bdver1

Benchmarks using both Fortran and C:

435.gromacs: -Ofast -OPT:rsqrt=2 -HP:bd=2m:heap=2m  
-CG:local\_sched\_alg=2 -CG:load\_exe=3 -GRA:unspill=on  
-march=bdver1 -LNO:simd=3

436.cactusADM: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
-LNO:blocking=off -LNO:prefetch=2 -LNO:pf2=0  
-LNO:prefetch\_ahead=4 -HP -CG:locs\_shallow\_depth=1  
-CG:load\_exe=0 -CG:dsched=on -WOPT:sib=on -march=bdver1

454.calculix: -Ofast -OPT:unroll\_size=256 -OPT:alias=disjoint  
-GRA:optimize\_boundary=on -CG:dsched=on -HP:bd=2m:heap=2m  
-march=bdver1

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server 1012G-MTF  
(H8SGL-F, AMD Opteron 6386 SE)

SPECfp\_rate2006 = 223

SPECfp\_rate\_base2006 = 199

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Sep-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

## Peak Optimization Flags (Continued)

```
481.wrf: -Ofast -LNO:blocking=off -LANG:copyinout=off
        -IPA:callee_limit=5000 -GRA:prioritize_by_density=on -HP
        -WOPT:sib=on -march=bdver1
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-I.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-I.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 14:32:04 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 2 January 2013.