



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server 4022G-6F (H8DG6-F, AMD Opteron 6380)  
AMD Opteron 6380

SPECfp<sup>®</sup>\_rate2006 = 421

SPECfp\_rate\_base2006 = 377

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Aug-2012

Hardware Availability: Sep-2012

Software Availability: Aug-2012

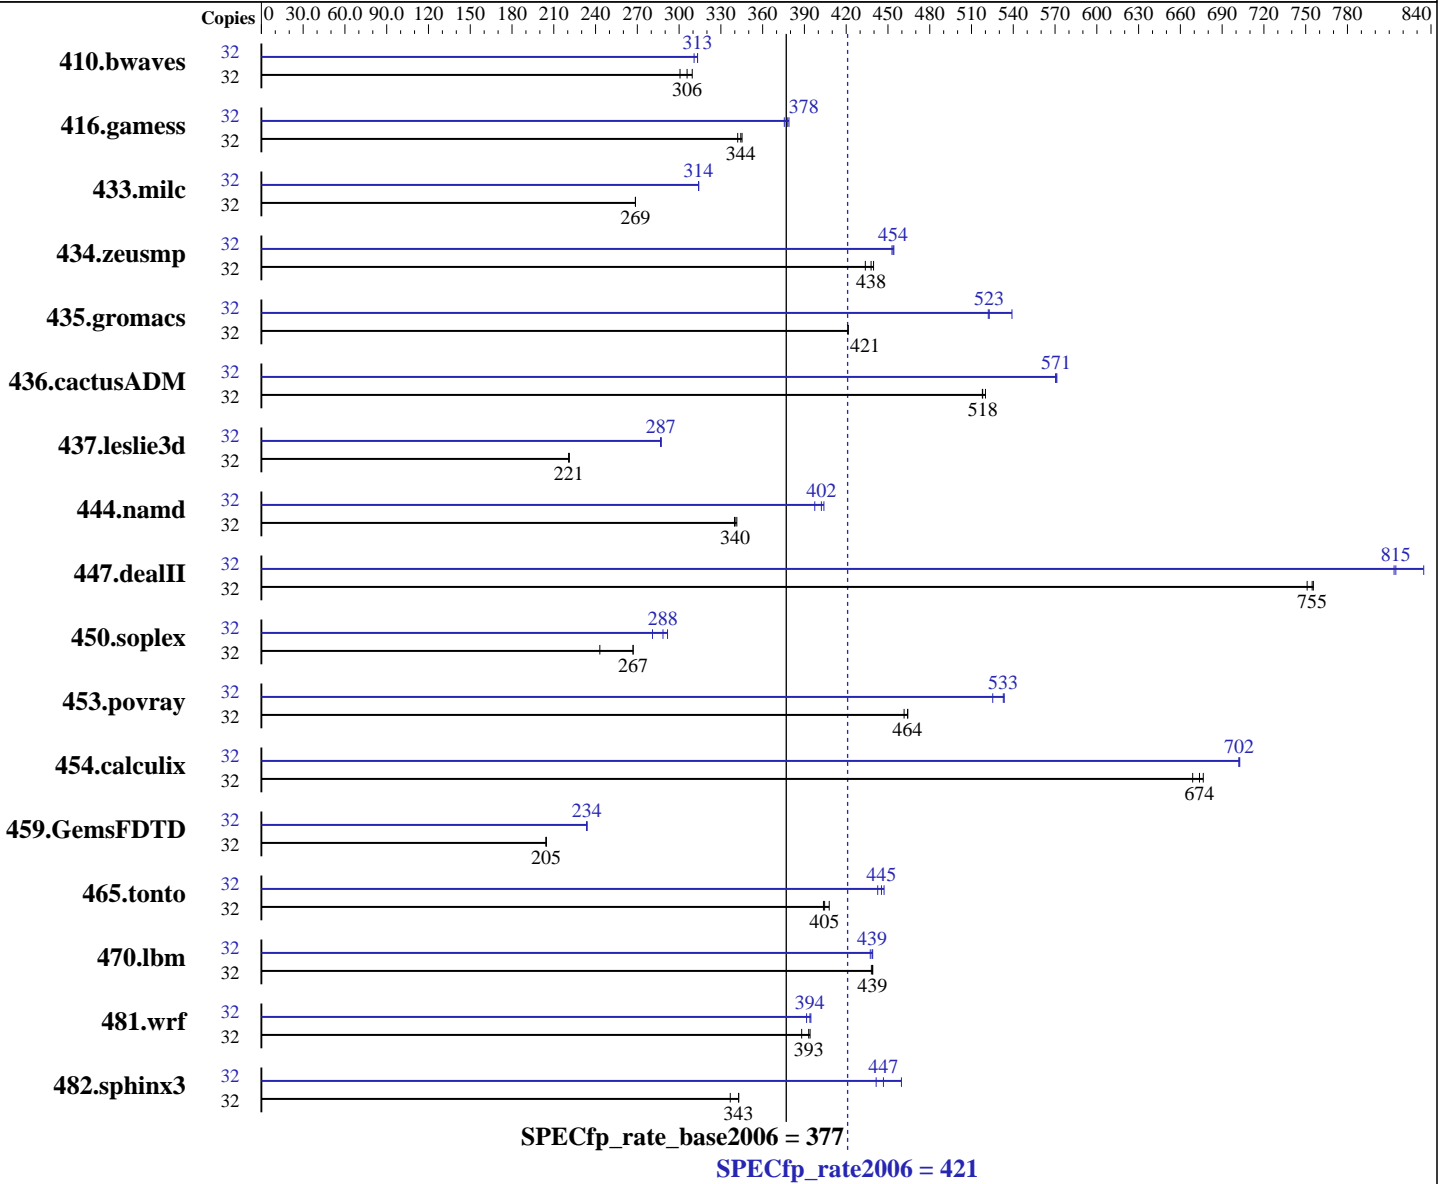

### Hardware

CPU Name: AMD Opteron 6380  
 CPU Characteristics: AMD Turbo CORE technology up to 3.40 GHz  
 CPU MHz: 2500  
 FPU: Integrated  
 CPU(s) enabled: 32 cores, 2 chips, 16 cores/chip  
 CPU(s) orderable: 1,2 chips

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2, Kernel 2.6.32-220.el6.x86\_64  
 Compiler: C/C++/Fortran: Version 4.5.2 of x86 Open64 Compiler Suite (from AMD)  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server 4022G-6F (H8DG6-F, AMD Opteron 6380)  
AMD Opteron 6380

SPECfp\_rate2006 = 421

SPECfp\_rate\_base2006 = 377

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Aug-2012

Hardware Availability: Sep-2012

Software Availability: Aug-2012

Primary Cache: 512 KB I on chip per chip,  
64 KB I shared / 2 cores;  
16 KB D on chip per core  
Secondary Cache: 16 MB I+D on chip per chip, 2 MB shared / 2 cores  
L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 8 cores  
Other Cache: None  
Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
Disk Subsystem: 1 x 500 GB SATA, 7200 RPM  
Other Hardware: None

Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	1446	301	<u>1422</u>	<u>306</u>	1405	309	32	<u>1388</u>	<u>313</u>	1399	311	1388	313
416.gamess	32	<u>1820</u>	<u>344</u>	1815	345	1832	342	32	<u>1658</u>	<u>378</u>	1654	379	1668	376
433.milc	32	1093	269	<u>1093</u>	<u>269</u>	1094	269	32	<u>935</u>	<u>314</u>	935	314	936	314
434.zeusmp	32	662	440	<u>665</u>	<u>438</u>	671	434	32	<u>642</u>	<u>454</u>	641	454	643	453
435.gromacs	32	<u>542</u>	<u>421</u>	542	421	542	421	32	424	539	<u>437</u>	<u>523</u>	438	522
436.cactusADM	32	739	518	<u>738</u>	<u>518</u>	735	520	32	<u>670</u>	<u>571</u>	670	570	669	571
437.leslie3d	32	1363	221	1360	221	<u>1362</u>	<u>221</u>	32	1049	287	1047	287	<u>1048</u>	<u>287</u>
444.namd	32	755	340	<u>754</u>	<u>340</u>	752	341	32	646	397	<u>638</u>	<u>402</u>	635	404
447.dealII	32	485	756	<u>485</u>	<u>755</u>	487	751	32	450	813	439	835	<u>449</u>	<u>815</u>
450.soplex	32	1098	243	<u>1000</u>	<u>267</u>	1000	267	32	950	281	<u>925</u>	<u>288</u>	915	292
453.povray	32	369	462	367	464	<u>367</u>	<u>464</u>	32	<u>319</u>	<u>533</u>	319	534	324	525
454.calculix	32	395	669	<u>392</u>	<u>674</u>	390	676	32	<u>376</u>	<u>702</u>	376	703	376	702
459.GemsFDTD	32	1661	204	<u>1659</u>	<u>205</u>	1659	205	32	<u>1453</u>	<u>234</u>	1454	234	1451	234
465.tonto	32	780	404	<u>778</u>	<u>405</u>	772	408	32	711	443	<u>707</u>	<u>445</u>	704	447
470.lbm	32	1001	439	1004	438	<u>1002</u>	<u>439</u>	32	<u>1003</u>	<u>439</u>	1005	437	1002	439
481.wrf	32	921	388	907	394	<u>909</u>	<u>393</u>	32	<u>907</u>	<u>394</u>	913	392	906	395
482.sphinx3	32	<u>1820</u>	<u>343</u>	1852	337	1819	343	32	1357	460	1413	442	<u>1396</u>	<u>447</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set transparent\_hugepage=never as a boot parameter in /boot/grub/menu.lst  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server 4022G-6F (H8DG6-F, AMD Opteron 6380)  
AMD Opteron 6380

SPECfp\_rate2006 = 421

SPECfp\_rate\_base2006 = 377

**CPU2006 license:** 001176  
**Test sponsor:** Supermicro  
**Tested by:** Supermicro

**Test date:** Aug-2012  
**Hardware Availability:** Sep-2012  
**Software Availability:** Aug-2012

## Operating System Notes (Continued)

```
Set vm/nr_hugepages=28672 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

## General Notes

Environment variables set by runspec before the start of the run:

```
HUGETLB_LIMIT = "896"
```

```
LD_LIBRARY_PATH = "/home/spec/amd1206-rate-libs-revA/32:/home/spec/amd1206-rate-libs-revA/64"
```

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6386SE chips + 128GB Memory using RHEL 6.3

## Base Compiler Invocation

C benchmarks:  
opencc

C++ benchmarks:  
openCC

Fortran benchmarks:  
openf95

Benchmarks using both Fortran and C:  
opencc openf95

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server 4022G-6F (H8DG6-F, AMD Opteron 6380)  
AMD Opteron 6380

SPECfp\_rate2006 = 421

SPECfp\_rate\_base2006 = 377

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Aug-2012

Hardware Availability: Sep-2012

Software Availability: Aug-2012

## Base Portability Flags (Continued)

481.wrf: -DSPEC\_CPU\_LINUX -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LP64  
-fno-second-underscore  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

### C benchmarks:

-Ofast -OPT:malloc\_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000  
-IPA:small\_pu=100 -mso -march=bdver1

### C++ benchmarks:

-Ofast -static -CG:load\_exe=0 -OPT:malloc\_alg=1 -INLINE:aggressive=on  
-HP:bd=2m:heap=2m -D\_\_OPEN64\_FAST\_SET -march=bdver1

### Fortran benchmarks:

-Ofast -LNO:blocking=off -LNO:simd\_peel\_align=on -OPT:rsqrt=2  
-OPT:unroll\_size=256 -HP:bd=2m:heap=2m -mso -march=bdver1

### Benchmarks using both Fortran and C:

-Ofast -OPT:malloc\_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000  
-IPA:small\_pu=100 -mso -march=bdver1 -LNO:blocking=off  
-LNO:simd\_peel\_align=on -OPT:rsqrt=2 -OPT:unroll\_size=256

## Peak Compiler Invocation

### C benchmarks:

opencc

### C++ benchmarks:

openCC

### Fortran benchmarks:

openf95

### Benchmarks using both Fortran and C:

opencc openf95

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server 4022G-6F (H8DG6-F, AMD Opteron 6380)  
AMD Opteron 6380

SPECfp\_rate2006 = 421

SPECfp\_rate\_base2006 = 377

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Aug-2012

Hardware Availability: Sep-2012

Software Availability: Aug-2012

## Peak Portability Flags (Continued)

435.gromacs: -DSPEC\_CPU\_LP64  
 436.cactusADM: -DSPEC\_CPU\_LP64 -fno-second-underscore  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LINUX -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LP64  
 -fno-second-underscore

## Peak Optimization Flags

C benchmarks:

433.milc: -Ofast -CG:movnti=1 -CG:locs\_best=on -HP:bdt=2m:heap=2m  
 -IPA:plimit=7000 -IPA:callee\_limit=1200  
 -OPT:struct\_array\_copy=2 -OPT:alias=field\_sensitive -mso  
 -march=bdver1

470.lbm: -Ofast -CG:cmp\_peep=on -OPT:keep\_ext=on -HP:bdt=2m:heap=2m  
 -IPA:plimit=8000 -IPA:small\_pu=100 -march=bdver1 -mso

482.sphinx3: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
 -m32 -IPA:plimit=1000 -OPT:malloc\_alg=2 -CG:cmp\_peep=on  
 -CG:p2align=0 -CG:load\_exe=1 -CG:dsched=on  
 -INLINE:aggressive=on -LNO:prefetch=2 -LNO:prefetch\_ahead=4  
 -mso -march=bdver2

C++ benchmarks:

444.namd: -Ofast -IPA:plimit=3000 -LNO:ignore\_feedback=off  
 -CG:local\_sched\_alg=0 -CG:load\_exe=0 -OPT:unroll\_size=256  
 -fno-exceptions -HP:bdt=2m:heap=2m -LNO:if\_select\_conv=1  
 -OPT:alias=disjoint -LNO:psimd\_iso\_unroll=ON -march=bdver1

447.dealIII: -Ofast -D\_\_OPEN64\_FAST\_SET -static -INLINE:aggressive=on  
 -LNO:opt=1 -LNO:simd=2 -fno-emit-exceptions -m32  
 -OPT:unroll\_times\_max=8 -OPT:unroll\_size=256  
 -OPT:unroll\_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on  
 -CG:cmp\_peep=on -CG:movext\_icmp=off -TENV:frame\_pointer=off  
 -march=bdver1

450.soplex: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O3  
 -LNO:ignore\_feedback=off -INLINE:aggressive=on -OPT:RO=1  
 -OPT:IEEE\_arith=3 -OPT:IEEE\_NaN\_Inf=off  
 -OPT:fold\_unsigned\_relops=on -fno-exceptions -CG:p2align=0  
 -m32 -mno-fma4 -HP:bdt=2m:heap=2m -WOPT:sib=on

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server 4022G-6F (H8DG6-F, AMD Opteron 6380)  
AMD Opteron 6380

SPECfp\_rate2006 = 421

SPECfp\_rate\_base2006 = 377

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Aug-2012

Hardware Availability: Sep-2012

Software Availability: Aug-2012

## Peak Optimization Flags (Continued)

450.soplex (continued):

-march=bdver1

453.povray: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast

-CG:pre\_local\_sched=off -CG:p2align=0 -CG:p2align\_split=on

-CG:dsched=on -INLINE:aggressive=on -HP:bd=2m:heap=2m

-OPT:transform=2 -OPT:alias=disjoint -WOPT:aggcm=0

-march=bdver2

Fortran benchmarks:

410.bwaves: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast

-OPT:Ofast -OPT:treeheight=on -LNO:blocking=off

-LNO:ignore\_feedback=off -LNO:fu=4 -LNO:loop\_model\_simd=on

-LNO:simd\_rm\_unity\_remainder=on -WOPT:aggstr=0

-HP:bd=2m:heap=2m -CG:cmp\_peep=on -march=bdver1

416.gamess: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast

-LNO:fu=6 -LNO:blocking=0 -LNO:simd=2 -OPT:ro=3

-OPT:recip=on -CG:local\_sched\_alg=1 -HP:bd=2m:heap=2m

-WOPT:sib=on -march=bdver1

434.zeusmp: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast

-LNO:blocking=off -LNO:interchange=off -IPA:plimit=1500

-HP:bd=2m:heap=2m -march=bdver1

437.leslie3d: -Ofast -CG:pre\_minreg\_level=2 -LNO:simd=0 -LNO:fusion=2

-HP:bd=2m:heap=2m -mso -march=bdver1

459.GemsFDTD: -Ofast -IPA:plimit=1500 -OPT:unroll\_size=1024

-OPT:unroll\_times\_max=16 -LNO:fission=2

-CG:local\_sched\_alg=2 -HP -march=bdver1

465.tonto: -Ofast -OPT:alias=no\_f90\_pointer\_alias -LNO:blocking=off

-CG:load\_exe=1 -CG:local\_sched\_alg=3 -IPA:plimit=525

-HP:bd=2m:heap=2m -march=bdver1

Benchmarks using both Fortran and C:

435.gromacs: -Ofast -OPT:rsqrt=2 -HP:bd=2m:heap=2m

-CG:local\_sched\_alg=2 -CG:load\_exe=3 -GRA:unspill=on

-march=bdver1 -LNO:simd=3

436.cactusADM: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast

-LNO:blocking=off -LNO:prefetch=2 -LNO:pf2=0

-LNO:prefetch\_ahead=4 -HP -CG:locs\_shallow\_depth=1

-CG:load\_exe=0 -CG:dsched=on -WOPT:sib=on -march=bdver1

454.calculix: -Ofast -OPT:unroll\_size=256 -OPT:alias=disjoint

-GRA:optimize\_boundary=on -CG:dsched=on -HP:bd=2m:heap=2m

-march=bdver1

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 6



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server 4022G-6F (H8DG6-F, AMD Opteron 6380)  
AMD Opteron 6380

SPECfp\_rate2006 = 421

SPECfp\_rate\_base2006 = 377

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Aug-2012

**Hardware Availability:** Sep-2012

**Software Availability:** Aug-2012

## Peak Optimization Flags (Continued)

```
481.wrf: -Ofast -LNO:blocking=off -LANG:copyinout=off
        -IPA:callee_limit=5000 -GRA:prioritize_by_density=on -HP
        -WOPT:sib=on -march=bdver1
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-I.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-I.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 14:41:29 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 2 January 2013.