



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

**SPECint®2006 = 53.3**

Cisco UCS B200 M3 (Intel Xeon E5-2667, 2.90 GHz)

**SPECint\_base2006 = 50.0**

CPU2006 license: 9019


Test date: Dec-2012

Test sponsor: Cisco Systems

Hardware Availability: Sep-2012

Tested by: Cisco Systems

Software Availability: Feb-2012

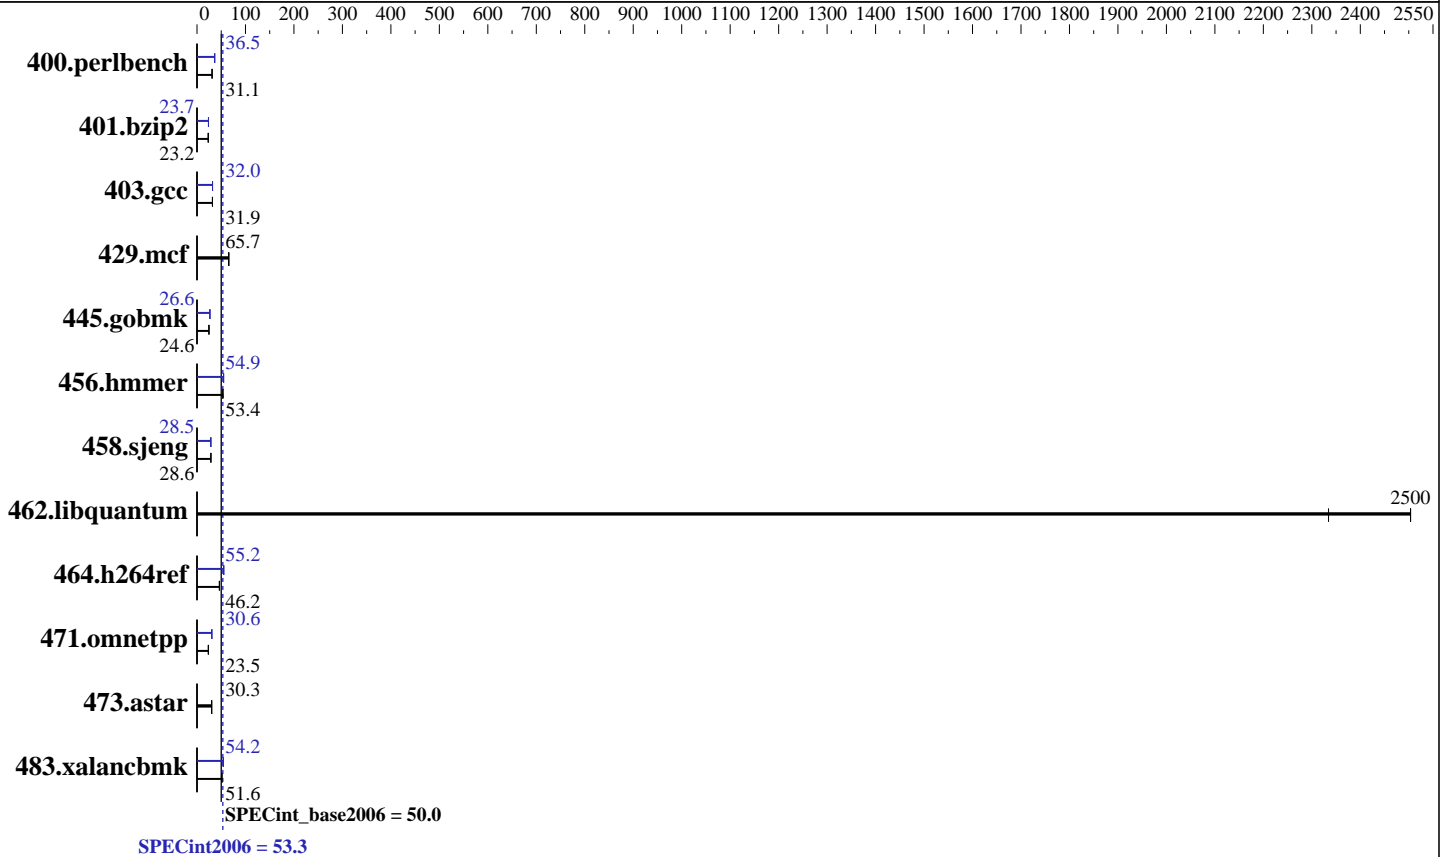

### Hardware

CPU Name: Intel Xeon E5-2667  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.50 GHz  
 CPU MHz: 2900  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 15 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: 1 X 600 GB 10000 RPM SAS  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
 2.6.32-220.el6.x86\_64  
 Compiler: C/C++: Version 12.1.3.293 of Intel C++ Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

SPECint2006 = **53.3**

Cisco UCS B200 M3 (Intel Xeon E5-2667, 2.90 GHz)

SPECint\_base2006 = **50.0**

CPU2006 license: 9019

Test date: Dec-2012

Test sponsor: Cisco Systems

Hardware Availability: Sep-2012

Tested by: Cisco Systems

Software Availability: Feb-2012

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	315	31.1	<b>314</b>	<b>31.1</b>	314	31.1	268	36.5	<b>268</b>	<b>36.5</b>	268	36.5
401.bzip2	<b>415</b>	<b>23.2</b>	415	23.3	416	23.2	408	23.7	<b>408</b>	<b>23.7</b>	408	23.7
403.gcc	<b>252</b>	<b>31.9</b>	252	31.9	253	31.8	<b>251</b>	<b>32.0</b>	251	32.0	251	32.1
429.mcf	<b>139</b>	<b>65.7</b>	140	65.0	139	65.7	<b>139</b>	<b>65.7</b>	140	65.0	139	65.7
445.gobmk	<b>426</b>	<b>24.6</b>	426	24.6	426	24.6	394	26.6	<b>394</b>	<b>26.6</b>	395	26.6
456.hammer	175	53.3	175	53.4	<b>175</b>	<b>53.4</b>	170	54.8	<b>170</b>	<b>54.9</b>	170	54.9
458.sjeng	423	28.6	422	28.7	<b>422</b>	<b>28.6</b>	424	28.5	<b>424</b>	<b>28.5</b>	424	28.5
462.libquantum	8.88	2330	<b>8.28</b>	<b>2500</b>	8.28	2500	8.88	2330	<b>8.28</b>	<b>2500</b>	8.28	2500
464.h264ref	479	46.2	<b>479</b>	<b>46.2</b>	478	46.3	<b>401</b>	<b>55.2</b>	400	55.3	403	55.0
471.omnetpp	265	23.6	<b>266</b>	<b>23.5</b>	268	23.3	<b>205</b>	<b>30.6</b>	204	30.6	205	30.5
473.astar	232	30.2	<b>232</b>	<b>30.3</b>	232	30.3	232	30.2	<b>232</b>	<b>30.3</b>	232	30.3
483.xalancbmk	134	51.6	136	50.9	<b>134</b>	<b>51.6</b>	127	54.3	127	54.2	<b>127</b>	<b>54.2</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Configuration:

Processor C6 Report set to Disabled

Processor C1E set to Disabled

CPU Performance set to HPC

LV DDR Mode set to Performance-mode

Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6800

\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3

running on localhost.localdomain Wed Dec 12 18:04:22 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-2667 0 @ 2.90GHz

2 "physical id"s (chips)

12 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 6

siblings : 6

physical 0: cores 0 1 2 3 4 5

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 2



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

**SPECint2006 = 53.3**

Cisco UCS B200 M3 (Intel Xeon E5-2667, 2.90 GHz)

**SPECint\_base2006 = 50.0**

**CPU2006 license:** 9019

**Test date:** Dec-2012

**Test sponsor:** Cisco Systems

**Hardware Availability:** Sep-2012

**Tested by:** Cisco Systems

**Software Availability:** Feb-2012

### Platform Notes (Continued)

physical 1: cores 0 1 2 3 4 5  
cache size : 15360 KB

```
From /proc/meminfo
MemTotal:      132101948 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.2 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux localhost.localdomain 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13
EST 2011 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Dec 12 18:02
```

```
SPEC is set to: /opt/cpu2006-1.2
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sdal       ext4      550G  9.9G  512G   2% /
```

Additional information from dmidecode:

```
Memory:
16x 0xCE00 M393B1K70DH0-YK0 8 GB 1600 MHz 2 rank
```

(End of data from sysinfo program)

### General Notes

Environment variables set by runspec before the start of the run:

```
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/opt/cpu2006-1.2/libs/32:/opt/cpu2006-1.2/libs/64"
OMP_NUM_THREADS = "12"
```

Intel HT Technology=disable

Binaries compiled on a system with 2 X Intel Xeon E5-2690 CPU + 128 GB memory using RHEL 6.2

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

### Base Compiler Invocation

C benchmarks:

```
icc -m64
```

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECint2006 = 53.3

Cisco UCS B200 M3 (Intel Xeon E5-2667, 2.90 GHz)

SPECint\_base2006 = 50.0

CPU2006 license: 9019

Test date: Dec-2012

Test sponsor: Cisco Systems

Hardware Availability: Sep-2012

Tested by: Cisco Systems

Software Availability: Feb-2012

## Base Compiler Invocation (Continued)

C++ benchmarks:  
icpc -m64

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
471.omnetpp: -DSPEC\_CPU\_LP64  
473.astar: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-Wl,-z,muldefs -L/smartheap -lsmartheap64

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m64

400.perlbench: icc -m32

445.gobmk: icc -m32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECint2006 = 53.3

Cisco UCS B200 M3 (Intel Xeon E5-2667, 2.90 GHz)

SPECint\_base2006 = 50.0

CPU2006 license: 9019

Test date: Dec-2012

Test sponsor: Cisco Systems

Hardware Availability: Sep-2012

Tested by: Cisco Systems

Software Availability: Feb-2012

## Peak Compiler Invocation (Continued)

464.h264ref: icc -m32

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

401.bzip2: -DSPEC\_CPU\_LP64

403.gcc: -DSPEC\_CPU\_LP64

429.mcf: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

473.astar: -DSPEC\_CPU\_LP64

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32  
-opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -inline-calloc  
-opt-malloc-options=3 -auto-ilp32

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32  
-ansi-alias

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECint2006 = 53.3

Cisco UCS B200 M3 (Intel Xeon E5-2667, 2.90 GHz)

SPECint\_base2006 = 50.0

CPU2006 license: 9019

Test date: Dec-2012

Test sponsor: Cisco Systems

Hardware Availability: Sep-2012

Tested by: Cisco Systems

Software Availability: Feb-2012

## Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-ra-region-strategy=block -ansi-alias  
-Wl,-z,muldefs -L/smartheap -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias  
-Wl,-z,muldefs -L/smartheap -lsmartheap

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20130607.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20130607.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 14:21:14 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 2 January 2013.