



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Huawei**

**SPECfp®2006 = 92.1**

**Huawei RH1288 V2 (Intel Xeon E5-2680)**

**SPECfp\_base2006 = 88.7**

**CPU2006 license:** 3175


**Test sponsor:** Huawei

**Tested by:** Huawei

**Test date:** Apr-2013

**Hardware Availability:** May-2012

**Software Availability:** Dec-2011

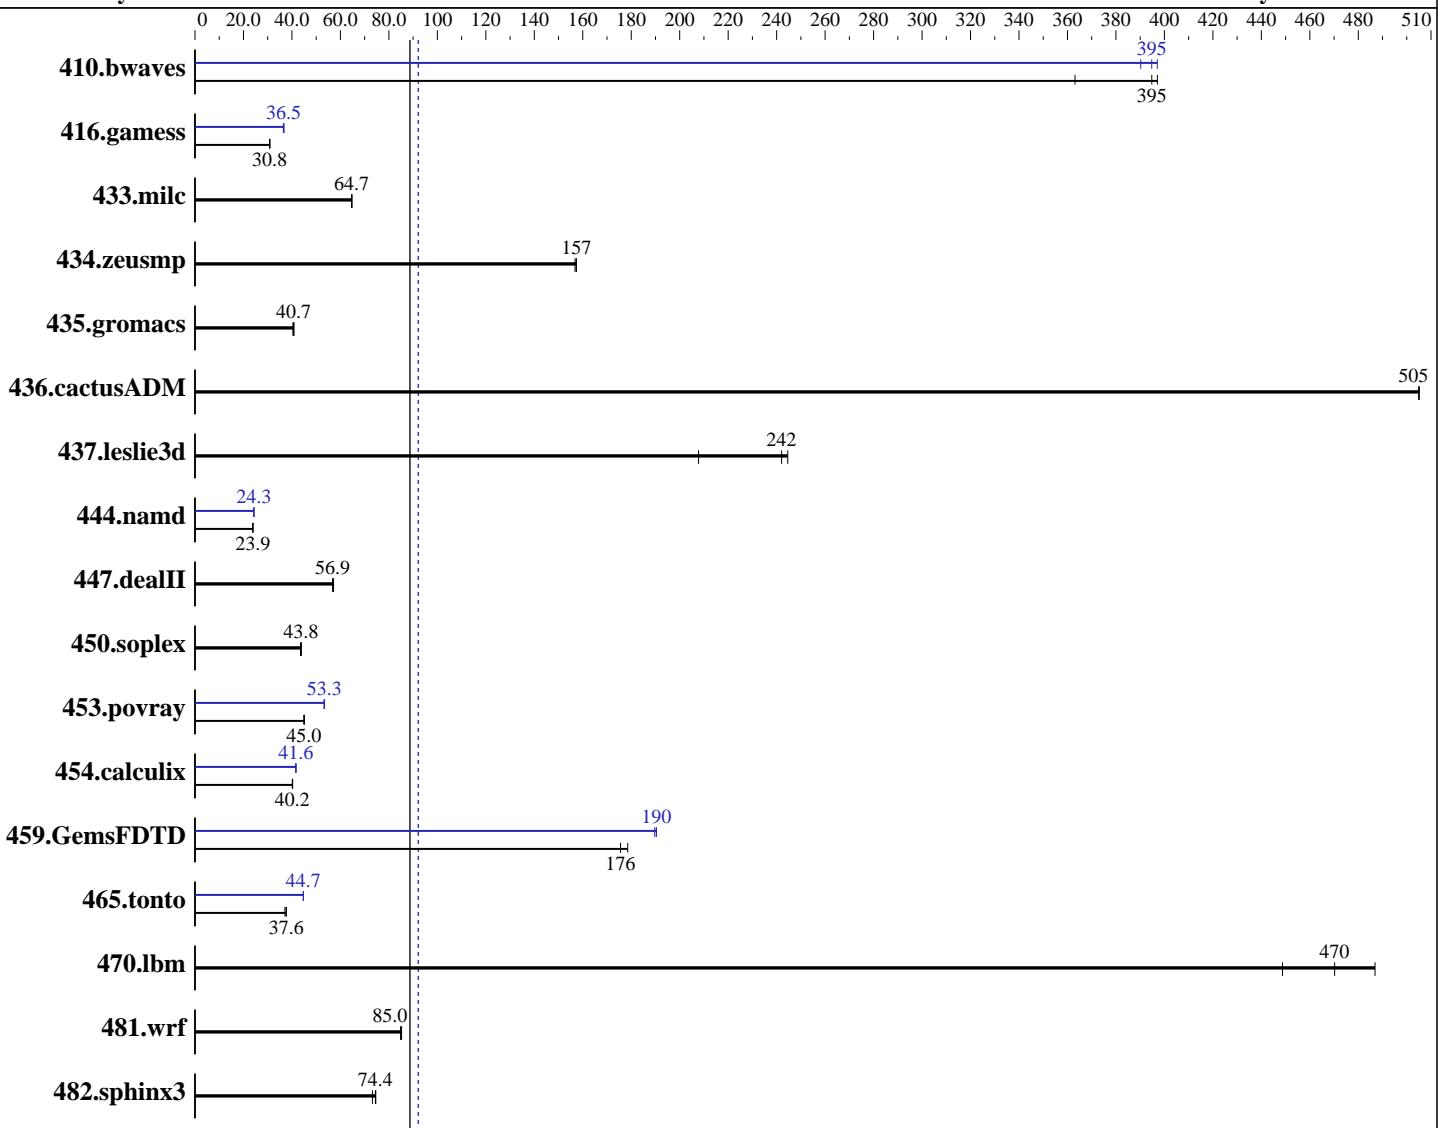

## Hardware

CPU Name: Intel Xeon E5-2680  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.50 GHz  
 CPU MHz: 2700  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

*Continued on next page*

## Software

Operating System: Red Hat Enterprise Linux Server release 6.3 (Santiago)  
 Compiler: 2.6.32-279.el6.x86\_64  
 C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;  
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4

*Continued on next page*



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Huawei**

**SPECfp2006 = 92.1**

**Huawei RH1288 V2 (Intel Xeon E5-2680)**

**SPECfp\_base2006 = 88.7**

**CPU2006 license:** 3175

**Test date:** Apr-2013

**Test sponsor:** Huawei

**Hardware Availability:** May-2012

**Tested by:** Huawei

**Software Availability:** Dec-2011

L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	37.4	363	<b>34.4</b>	<b>395</b>	34.2	397	<b>34.2</b>	<b>397</b>	34.8	390	<b>34.4</b>	<b>395</b>
416.gamess	636	30.8	<b>636</b>	<b>30.8</b>	634	30.9	<b>536</b>	<b>36.5</b>	537	36.5	533	36.8
433.milc	142	64.7	142	64.7	<b>142</b>	<b>64.7</b>	<b>142</b>	<b>64.7</b>	142	64.7	<b>142</b>	<b>64.7</b>
434.zeusmp	58.0	157	57.8	157	<b>57.8</b>	<b>157</b>	<b>58.0</b>	<b>157</b>	57.8	157	<b>57.8</b>	<b>157</b>
435.gromacs	177	40.4	175	40.8	<b>175</b>	<b>40.7</b>	177	40.4	175	40.8	<b>175</b>	<b>40.7</b>
436.cactusADM	23.7	505	<b>23.7</b>	<b>505</b>	23.7	505	<b>23.7</b>	<b>505</b>	<b>23.7</b>	<b>505</b>	23.7	505
437.leslie3d	<b>38.8</b>	<b>242</b>	45.2	208	38.4	245	<b>38.8</b>	<b>242</b>	45.2	208	38.4	245
444.namd	336	23.9	336	23.9	<b>336</b>	<b>23.9</b>	330	24.3	<b>330</b>	<b>24.3</b>	330	24.3
447.dealII	<b>201</b>	<b>56.9</b>	200	57.2	201	56.8	<b>201</b>	<b>56.9</b>	200	57.2	201	56.8
450.soplex	192	43.5	190	43.8	<b>191</b>	<b>43.8</b>	<b>192</b>	<b>43.5</b>	190	43.8	<b>191</b>	<b>43.8</b>
453.povray	<b>118</b>	<b>45.0</b>	118	44.9	118	45.1	<b>99.5</b>	<b>53.5</b>	99.9	53.3	<b>99.8</b>	<b>53.3</b>
454.calculix	<b>205</b>	<b>40.2</b>	205	40.2	205	40.3	<b>198</b>	<b>41.7</b>	198	41.6	<b>198</b>	<b>41.6</b>
459.GemsFDTD	59.4	179	<b>60.4</b>	<b>176</b>	60.4	176	<b>55.9</b>	<b>190</b>	<b>55.7</b>	190	<b>55.7</b>	<b>190</b>
465.tonto	261	37.7	<b>262</b>	<b>37.6</b>	265	37.1	<b>220</b>	<b>44.7</b>	<b>220</b>	<b>44.7</b>	220	44.7
470.lbm	28.2	487	<b>29.2</b>	<b>470</b>	30.6	449	<b>28.2</b>	<b>487</b>	<b>29.2</b>	<b>470</b>	30.6	449
481.wrf	132	84.8	131	85.2	<b>131</b>	<b>85.0</b>	132	84.8	131	85.2	<b>131</b>	<b>85.0</b>
482.sphinx3	266	73.2	261	74.6	<b>262</b>	<b>74.4</b>	<b>266</b>	<b>73.2</b>	261	74.6	<b>262</b>	<b>74.4</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled with:

Select only test related files when installing the operating system

## Platform Notes

BIOS configuration:

Set Power Efficiency Mode to Performance

Baseboard Management Controller used to adjust the fan speed to 100%

Sysinfo program /spec/config/sysinfo.rev6800

\$Rev: 6800 \$ \$Date::: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3  
running on z-spectest Sun Apr 21 07:10:04 2013

This section contains SUT (System Under Test) info as seen by

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 92.1

Huawei RH1288 V2 (Intel Xeon E5-2680)

SPECfp\_base2006 = 88.7

CPU2006 license: 3175

Test date: Apr-2013

Test sponsor: Huawei

Hardware Availability: May-2012

Tested by: Huawei

Software Availability: Dec-2011

## Platform Notes (Continued)

some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-2680 0 @ 2.70GHz
        2 "physical id"s (chips)
        16 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The
    following excerpts from /proc/cpuinfo might not be reliable. Use with
    caution.)
        cpu cores : 8
        siblings   : 8
        physical 0: cores 0 1 2 3 4 5 6 7
        physical 1: cores 0 1 2 3 4 5 6 7
    cache size : 20480 KB
```

```
From /proc/meminfo
    MemTotal:      132118004 kB
    HugePages_Total:       0
    Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
    Red Hat Enterprise Linux Server release 6.3 (Santiago)
```

```
From /etc/*release* /etc/*version*
    redhat-release: Red Hat Enterprise Linux Server release 6.3 (Santiago)
    system-release: Red Hat Enterprise Linux Server release 6.3 (Santiago)
    system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
    Linux z-spectest 2.6.32-279.el6.x86_64 #1 SMP Wed Jun 13 18:24:36 EDT 2012
    x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Apr 21 01:19
```

```
SPEC is set to: /spec
    Filesystem      Type  Size  Used Avail Use% Mounted on
    /dev/sda2        ext4  289G  6.2G  268G  3%  /
```

Additional information from dmidecode:

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,0,1"  
LD\_LIBRARY\_PATH = "/spec/libs/32:/spec/libs/64"  
OMP\_NUM\_THREADS = "16"

Binaries compiled on a system with 2 x Xeon X5645 CPU + 16GB memory

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Huawei**

Huawei RH1288 V2 (Intel Xeon E5-2680)

**SPECfp2006 = 92.1**

**CPU2006 license:** 3175

**Test date:** Apr-2013

**Test sponsor:** Huawei

**Hardware Availability:** May-2012

**Tested by:** Huawei

**Software Availability:** Dec-2011

## General Notes (Continued)

using RHEL 6.1

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

## Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
        433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
        444.namd: -DSPEC_CPU_LP64
        447.dealII: -DSPEC_CPU_LP64
        450.soplex: -DSPEC_CPU_LP64
        453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
        465.tonto: -DSPEC_CPU_LP64
        470.lbm: -DSPEC_CPU_LP64
        481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias
```

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

**SPECfp2006 = 92.1**

Huawei RH1288 V2 (Intel Xeon E5-2680)

**SPECfp\_base2006 = 88.7**

**CPU2006 license:** 3175

**Test sponsor:** Huawei

**Tested by:** Huawei

**Test date:** Apr-2013

**Hardware Availability:** May-2012

**Software Availability:** Dec-2011

## Base Optimization Flags (Continued)

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
433.milc: basepeak = yes
```

```
470.lbm: basepeak = yes
```

```
482.sphinx3: basepeak = yes
```

C++ benchmarks:

```
444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32
```

```
447.dealII: basepeak = yes
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei RH1288 V2 (Intel Xeon E5-2680)

SPECfp2006 =

92.1

SPECfp\_base2006 =

88.7

CPU2006 license: 3175

Test date: Apr-2013

Test sponsor: Huawei

Hardware Availability: May-2012

Tested by: Huawei

Software Availability: Dec-2011

## Peak Optimization Flags (Continued)

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll14 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel  
-static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll12  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll12  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll14

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>  
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revE.20121120.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>  
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revE.20121120.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei RH1288 V2 (Intel Xeon E5-2680)

**SPECfp2006 = 92.1**

**SPECfp\_base2006 = 88.7**

**CPU2006 license:** 3175

**Test sponsor:** Huawei

**Tested by:** Huawei

**Test date:** Apr-2013

**Hardware Availability:** May-2012

**Software Availability:** Dec-2011

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 15:25:33 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 4 June 2013.