



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M420 (Intel Xeon E5-2450 v2,
2.50 GHz)

SPECfp[®]_rate2006 = 454

SPECfp_rate_base2006 = 442

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Nov-2013

Hardware Availability: Jan-2014

Software Availability: Sep-2013

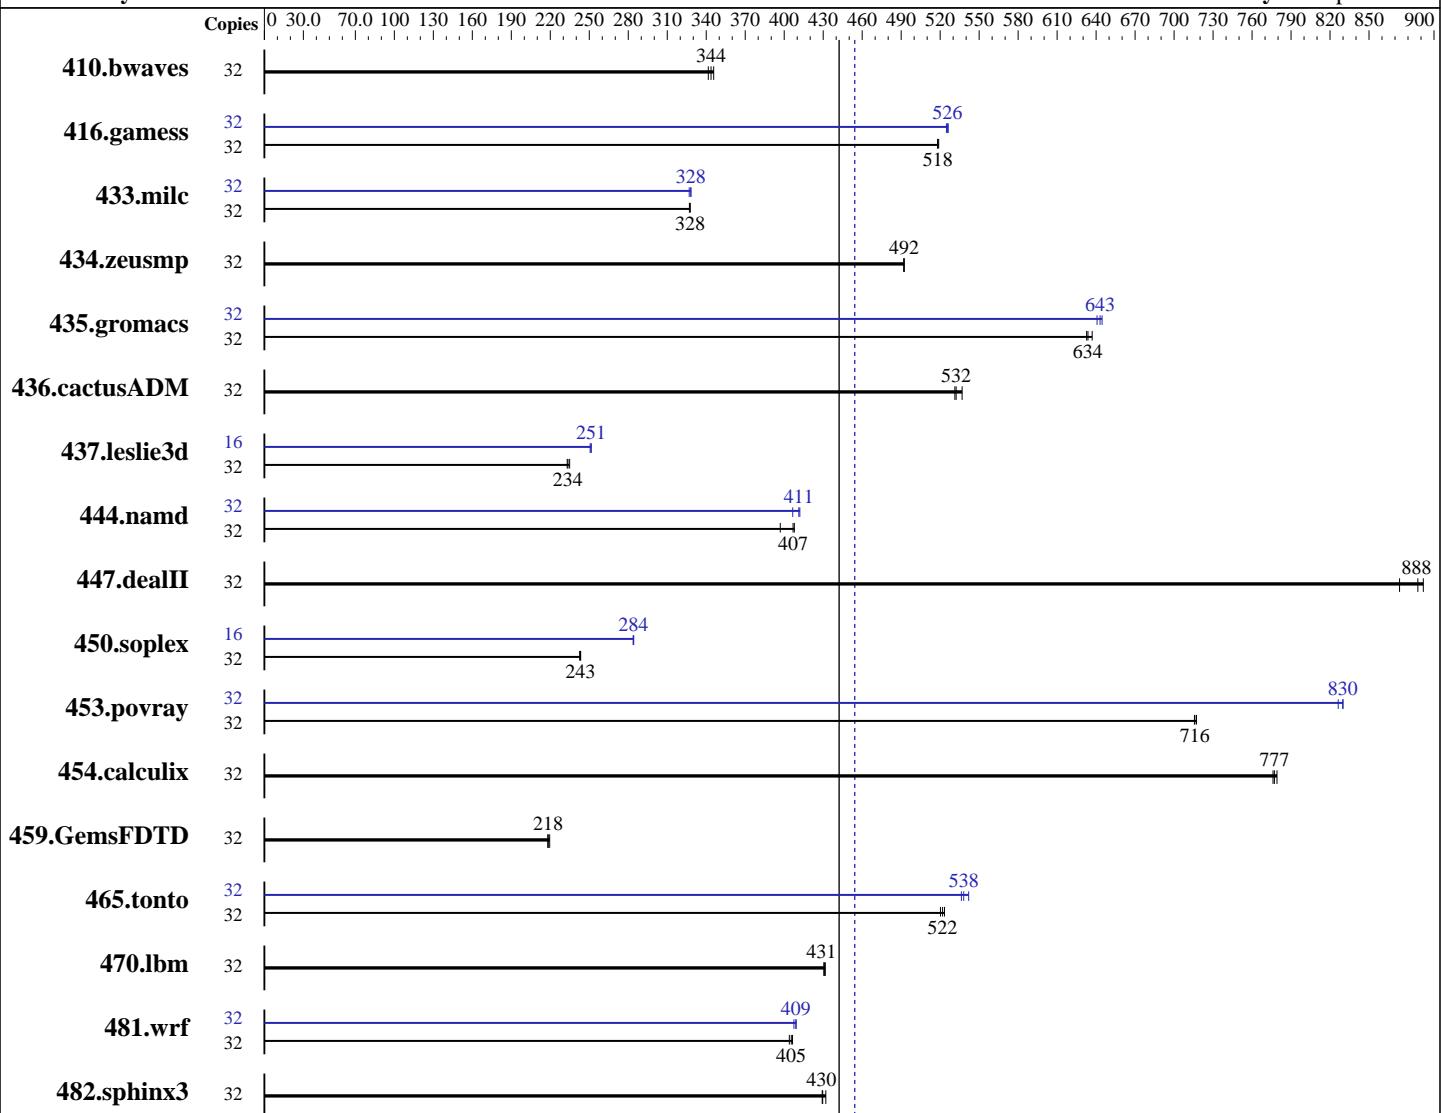

SPECfp_rate_base2006 = 442

SPECfp[®]2006 = 454

Hardware

CPU Name: Intel Xeon E5-2450 v2
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz
 CPU MHz: 2500
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64)
 3.0.70-0.9-default
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE
 for Linux;
 Fortran: Version 14.0.0.080 of Intel Fortran
 Studio XE for Linux
 Auto Parallel: No
 File System: ext2
 System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M420 (Intel Xeon E5-2450 v2,
2.50 GHz)

SPECfp_rate2006 = 454

SPECfp_rate_base2006 = 442

CPU2006 license: 55

Test date: Nov-2013

Test sponsor: Dell Inc.

Hardware Availability: Jan-2014

Tested by: Dell Inc.

Software Availability: Sep-2013

L3 Cache: 20 MB I+D on chip per chip
 Other Cache: None
 Memory: 96 GB (6 x 16 GB 2Rx4 PC3L-12800R-11, ECC)
 Disk Subsystem: 2 x 50 GB SATA SSD, RAID 0
 Other Hardware: None

Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	<u>1265</u>	<u>344</u>	1258	346	1273	342	32	<u>1265</u>	<u>344</u>	1258	346	1273	342
416.gamess	32	1208	519	1210	518	<u>1209</u>	<u>518</u>	32	<u>1192</u>	<u>526</u>	1194	525	1191	526
433.milc	32	<u>897</u>	<u>328</u>	898	327	897	328	32	<u>895</u>	<u>328</u>	899	327	<u>895</u>	<u>328</u>
434.zeusmp	32	<u>592</u>	<u>492</u>	592	492	592	492	32	<u>592</u>	<u>492</u>	592	492	592	492
435.gromacs	32	<u>361</u>	<u>634</u>	359	637	361	633	32	354	645	<u>355</u>	<u>643</u>	357	641
436.cactusADM	32	<u>718</u>	<u>532</u>	712	537	720	531	32	<u>718</u>	<u>532</u>	712	537	720	531
437.leslie3d	32	1281	235	<u>1288</u>	<u>234</u>	1291	233	16	598	251	600	251	<u>598</u>	<u>251</u>
444.namd	32	<u>631</u>	<u>407</u>	629	408	646	397	32	623	412	<u>624</u>	<u>411</u>	631	407
447.dealII	32	<u>412</u>	<u>888</u>	419	873	411	892	32	<u>412</u>	<u>888</u>	419	873	411	892
450.soplex	32	<u>1097</u>	<u>243</u>	1097	243	1100	243	16	<u>470</u>	<u>284</u>	<u>470</u>	<u>284</u>	470	284
453.povray	32	237	717	<u>238</u>	<u>716</u>	238	716	32	206	826	205	830	<u>205</u>	<u>830</u>
454.calculix	32	339	779	<u>340</u>	<u>777</u>	340	776	32	339	779	<u>340</u>	<u>777</u>	340	776
459.GemsFDTD	32	1547	220	<u>1554</u>	<u>218</u>	1557	218	32	1547	220	<u>1554</u>	<u>218</u>	1557	218
465.tonto	32	<u>603</u>	<u>522</u>	602	523	605	520	32	<u>585</u>	<u>538</u>	587	536	581	542
470.lbm	32	1021	430	<u>1020</u>	<u>431</u>	1019	432	32	1021	430	<u>1020</u>	<u>431</u>	1019	432
481.wrf	32	<u>882</u>	<u>405</u>	880	406	885	404	32	877	407	<u>874</u>	<u>409</u>	873	409
482.sphinx3	32	1444	432	<u>1452</u>	<u>430</u>	1453	429	32	<u>1444</u>	<u>432</u>	<u>1452</u>	<u>430</u>	1453	429

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS settings:
 Virtualization Technology disabled
 Execute Disable disabled

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M420 (Intel Xeon E5-2450 v2,
2.50 GHz)

SPECfp_rate2006 = 454

SPECfp_rate_base2006 = 442

CPU2006 license: 55

Test date: Nov-2013

Test sponsor: Dell Inc.

Hardware Availability: Jan-2014

Tested by: Dell Inc.

Software Availability: Sep-2013

Platform Notes (Continued)

```
Logical Processor enabled
System Profile set to Performance
Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on linux Tue Nov 19 03:14:40 2013
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-2450 v2 @ 2.50GHz
        2 "physical id"s (chips)
        32 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The
    following excerpts from /proc/cpuinfo might not be reliable. Use with
    caution.)
        cpu cores : 8
        siblings : 16
        physical 0: cores 0 1 2 3 4 5 6 7
        physical 1: cores 0 1 2 3 4 5 6 7
    cache size : 20480 KB
```

```
From /proc/meminfo
    MemTotal:      99123324 kB
    HugePages_Total:       0
    Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 11 (x86_64)
```

```
From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 11 (x86_64)
    VERSION = 11
    PATCHLEVEL = 3
```

```
uname -a:
Linux linux 3.0.70-0.9-default #1 SMP Tue Apr 2 13:01:38 UTC 2013 (25ae5d2)
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Nov 18 15:00 last=S
```

```
SPEC is set to: /root/cpu2006-1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        ext2   83G   36G   47G  44%  /
```

Additional information from dmidecode:

BIOS Dell Inc. 2.0.22 09/23/2013

Memory:

6x 00CE04B300CE M393B2G70BH0-YK0 16 GB 1600 MHz

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M420 (Intel Xeon E5-2450 v2,
2.50 GHz)

SPECfp_rate2006 = 454

SPECfp_rate_base2006 = 442

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Nov-2013

Hardware Availability: Jan-2014

Software Availability: Sep-2013

Platform Notes (Continued)

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M420 (Intel Xeon E5-2450 v2,
2.50 GHz)

SPECfp_rate2006 = 454

SPECfp_rate_base2006 = 442

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Nov-2013

Hardware Availability: Jan-2014

Software Availability: Sep-2013

Base Portability Flags (Continued)

470.lbm: -DSPEC_CPU_LP64

481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

450.soplex: icpc -m32

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M420 (Intel Xeon E5-2450 v2,
2.50 GHz)

SPECfp_rate2006 = 454

SPECfp_rate_base2006 = 442

CPU2006 license: 55

Test date: Nov-2013

Test sponsor: Dell Inc.

Hardware Availability: Jan-2014

Tested by: Dell Inc.

Software Availability: Sep-2013

Peak Portability Flags (Continued)

```

435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
           -prof-use(pass 2) -auto-ilp32

```

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
           -prof-use(pass 2) -fno-alias -auto-ilp32

```

447.dealII: basepeak = yes

```

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
           -prof-use(pass 2) -opt-malloc-options=3

```

```

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
           -prof-use(pass 2) -unroll4 -ansi-alias

```

Fortran benchmarks:

410.bwaves: basepeak = yes

```

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
           -inline-level=0 -scalar-rep-

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M420 (Intel Xeon E5-2450 v2,
2.50 GHz)

SPECfp_rate2006 = 454

SPECfp_rate_base2006 = 442

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Nov-2013

Hardware Availability: Jan-2014

Software Availability: Sep-2013

Peak Optimization Flags (Continued)

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll14 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>
<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>
<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revB.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 21:17:01 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 28 January 2014.