



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECfp<sup>®</sup>2006 = 49.0

PRIMERGY BX920 S4, Intel Xeon E5-2403 v2, 1.80 GHz

SPECfp\_base2006 = 47.6

CPU2006 license: 19


Test date: Jan-2014

Test sponsor: Fujitsu

Hardware Availability: Jan-2014

Tested by: Fujitsu

Software Availability: Sep-2013

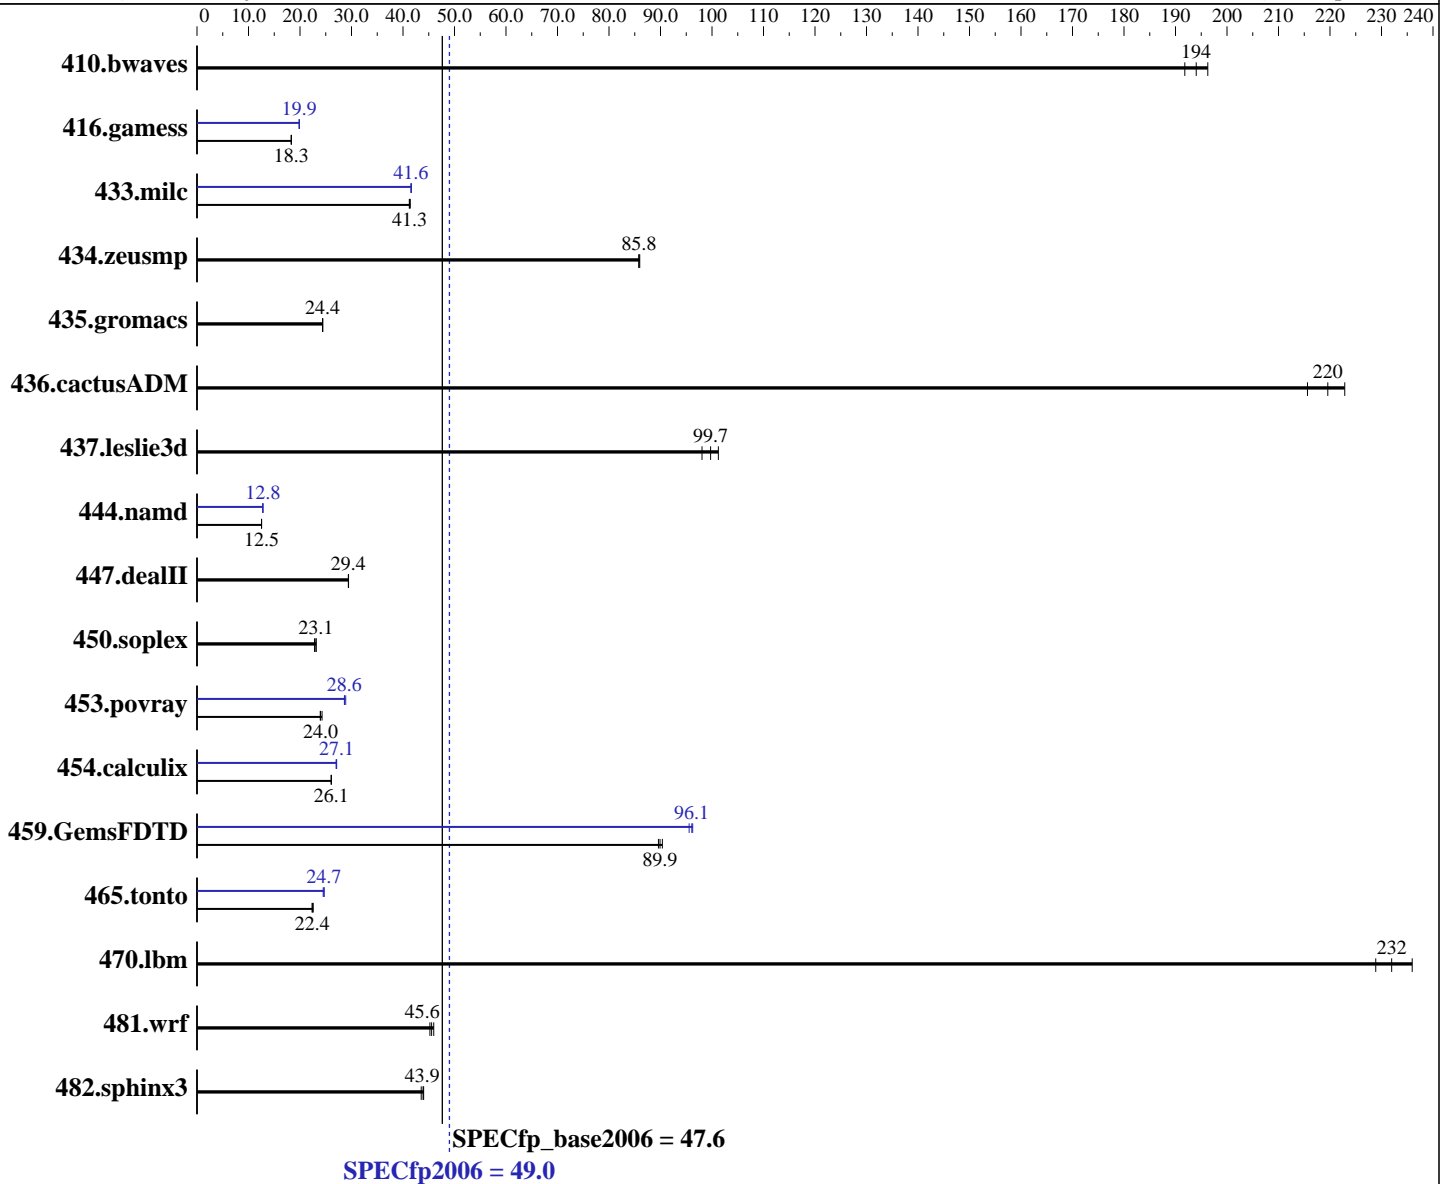

### Hardware

CPU Name: Intel Xeon E5-2403 v2  
 CPU Characteristics:  
 CPU MHz: 1800  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
 2.6.32-358.11.1.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECfp2006 = **49.0**

PRIMERGY BX920 S4, Intel Xeon E5-2403 v2, 1.80 GHz

SPECfp\_base2006 = **47.6**

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jan-2014

Hardware Availability: Jan-2014

Software Availability: Sep-2013

L3 Cache: 10 MB I+D on chip per chip  
Other Cache: None  
Memory: 192 GB (12 x 16 GB 2Rx4 PC3L-12800R-11, ECC, running at 1333 MHz and CL9)  
Disk Subsystem: 1 x SATA, 500 GB, 7200 RPM  
Other Hardware: None

System State: Run level 5 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	70.9	192	<b>70.0</b>	<b>194</b>	69.2	196	70.9	192	<b>70.0</b>	<b>194</b>	69.2	196
416.gamess	1069	18.3	1069	18.3	<b>1069</b>	<b>18.3</b>	986	19.9	986	19.9	<b>986</b>	<b>19.9</b>
433.milc	223	41.2	222	41.4	<b>222</b>	<b>41.3</b>	<b>221</b>	<b>41.6</b>	221	41.6	220	41.6
434.zeusmp	106	86.0	<b>106</b>	<b>85.8</b>	106	85.8	106	86.0	<b>106</b>	<b>85.8</b>	106	85.8
435.gromacs	<b>293</b>	<b>24.4</b>	292	24.4	293	24.4	<b>293</b>	<b>24.4</b>	292	24.4	293	24.4
436.cactusADM	<b>54.4</b>	<b>220</b>	53.6	223	55.4	216	<b>54.4</b>	<b>220</b>	53.6	223	55.4	216
437.leslie3d	<b>94.3</b>	<b>99.7</b>	92.9	101	95.9	98.1	<b>94.3</b>	<b>99.7</b>	92.9	101	95.9	98.1
444.namd	<b>640</b>	<b>12.5</b>	640	12.5	640	12.5	<b>627</b>	<b>12.8</b>	<b>627</b>	<b>12.8</b>	627	12.8
447.dealII	<b>389</b>	<b>29.4</b>	389	29.4	389	29.4	<b>389</b>	<b>29.4</b>	389	29.4	389	29.4
450.soplex	360	23.1	<b>361</b>	<b>23.1</b>	366	22.8	360	23.1	<b>361</b>	<b>23.1</b>	366	22.8
453.povray	222	23.9	<b>222</b>	<b>24.0</b>	219	24.3	186	28.6	<b>186</b>	<b>28.6</b>	184	28.9
454.calculix	<b>316</b>	<b>26.1</b>	316	26.1	317	26.1	<b>304</b>	<b>27.1</b>	305	27.0	304	27.1
459.GemsFDTD	118	89.6	117	90.4	<b>118</b>	<b>89.9</b>	110	96.3	<b>110</b>	<b>96.1</b>	111	95.6
465.tonto	<b>439</b>	<b>22.4</b>	436	22.6	440	22.4	399	24.7	<b>399</b>	<b>24.7</b>	402	24.5
470.lbm	<b>59.2</b>	<b>232</b>	58.2	236	60.0	229	<b>59.2</b>	<b>232</b>	58.2	236	60.0	229
481.wrf	247	45.2	<b>245</b>	<b>45.6</b>	243	46.0	247	45.2	<b>245</b>	<b>45.6</b>	243	46.0
482.sphinx3	<b>444</b>	<b>43.9</b>	443	44.0	448	43.5	<b>444</b>	<b>43.9</b>	443	44.0	448	43.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:  
Energy Performance = Performance  
Utilization Profile = Unbalanced

## General Notes

Environment variables set by runspec before the start of the run:  
KMP\_AFFINITY = "granularity=fine,compact,1,0"  
LD\_LIBRARY\_PATH = "/SPECcpu2006/libs/32:/SPECcpu2006/libs/64:/SPECcpu2006/sh"  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp2006 = 49.0**

PRIMERGY BX920 S4, Intel Xeon E5-2403 v2, 1.80 GHz

**SPECfp\_base2006 = 47.6**

**CPU2006 license:** 19

**Test date:** Jan-2014

**Test sponsor:** Fujitsu

**Hardware Availability:** Jan-2014

**Tested by:** Fujitsu

**Software Availability:** Sep-2013

## General Notes (Continued)

OMP\_NUM\_THREADS = "8"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

For information about Fujitsu please visit: <http://www.fujitsu.com>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.deallI: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp2006 = 49.0**

PRIMERGY BX920 S4, Intel Xeon E5-2403 v2, 1.80 GHz

**SPECfp\_base2006 = 47.6**

**CPU2006 license:** 19

**Test date:** Jan-2014

**Test sponsor:** Fujitsu

**Hardware Availability:** Jan-2014

**Tested by:** Fujitsu

**Software Availability:** Sep-2013

## Base Optimization Flags

C benchmarks:

`-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias`

C++ benchmarks:

`-xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias`

Fortran benchmarks:

`-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch`

Benchmarks using both Fortran and C:

`-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias`

## Peak Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: `-xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32  
-ansi-alias`

470.lbm: `basepeak = yes`

482.sphinx3: `basepeak = yes`

C++ benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp2006 = 49.0**

PRIMERGY BX920 S4, Intel Xeon E5-2403 v2, 1.80 GHz

**SPECfp\_base2006 = 47.6**

**CPU2006 license:** 19

**Test date:** Jan-2014

**Test sponsor:** Fujitsu

**Hardware Availability:** Jan-2014

**Tested by:** Fujitsu

**Software Availability:** Sep-2013

## Peak Optimization Flags (Continued)

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

### Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20131009.html>

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20131009.xml>

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

**SPECfp2006 = 49.0**

PRIMERGY BX920 S4, Intel Xeon E5-2403 v2, 1.80 GHz

**SPECfp\_base2006 = 47.6**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Jan-2014

**Hardware Availability:** Jan-2014

**Software Availability:** Sep-2013

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 20:36:50 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 11 February 2014.