



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation


IBM System x3250 M5
(Intel Xeon E3-1240 v3, 3.40 GHz)

SPECfp®_rate2006 = 153

SPECfp_rate_base2006 = 147

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Mar-2014
Hardware Availability: Dec-2013
Software Availability: Sep-2013

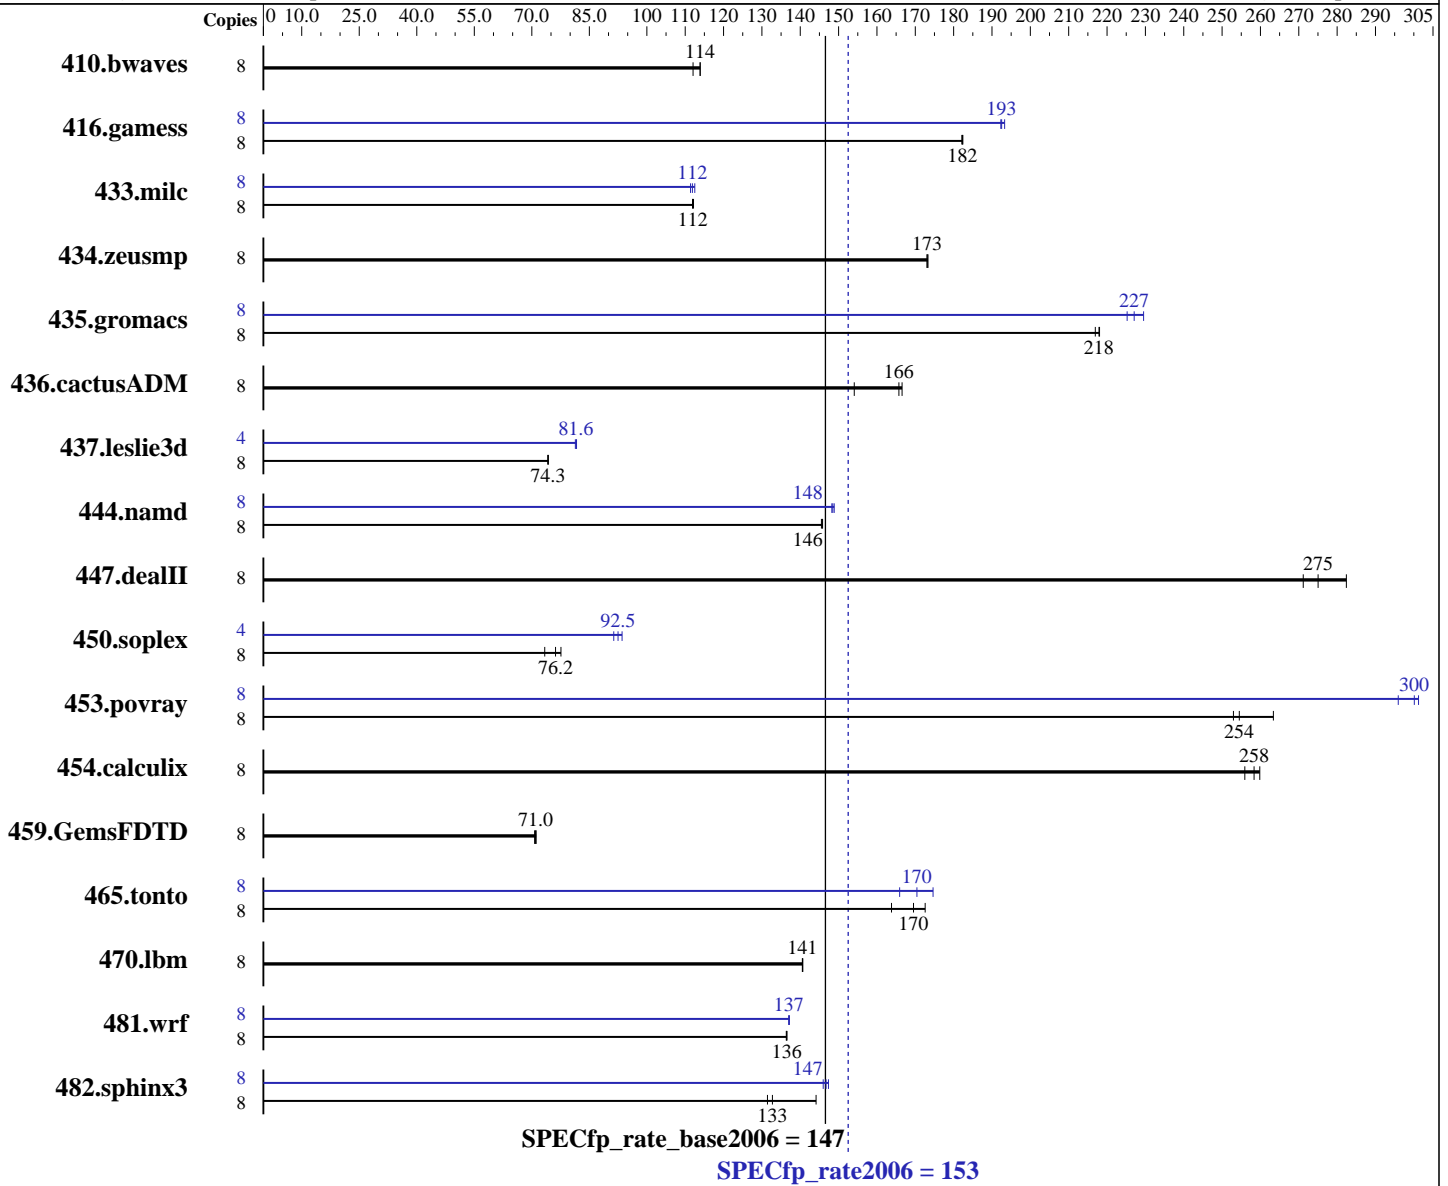

Hardware

CPU Name: Intel Xeon E3-1240 v3
CPU Characteristics: Intel Turbo Boost Technology up to 3.80 GHz
CPU MHz: 3400
FPU: Integrated
CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
CPU(s) orderable: 1 chip
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)
2.6.32-358.el6.x86_64
Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
Auto Parallel: No
File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3250 M5
(Intel Xeon E3-1240 v3, 3.40 GHz)

SPECfp_rate2006 = 153

SPECfp_rate_base2006 = 147

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Mar-2014

Hardware Availability: Dec-2013

Software Availability: Sep-2013

L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 16 GB (2 x 8 GB 2Rx8 PC3-12800E-11, ECC)
Disk Subsystem: 1 x 1 TB SATA, 7200 RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	955	114	970	112	<u>955</u>	<u>114</u>	8	955	114	970	112	<u>955</u>	<u>114</u>
416.gamess	8	859	182	860	182	<u>859</u>	<u>182</u>	8	<u>814</u>	<u>193</u>	810	193	815	192
433.milc	8	<u>656</u>	<u>112</u>	655	112	656	112	8	653	113	659	111	<u>656</u>	<u>112</u>
434.zeusmp	8	421	173	420	173	<u>421</u>	<u>173</u>	8	421	173	420	173	<u>421</u>	<u>173</u>
435.gromacs	8	262	218	<u>262</u>	<u>218</u>	263	217	8	<u>252</u>	<u>227</u>	254	225	249	230
436.cactusADM	8	574	167	<u>577</u>	<u>166</u>	620	154	8	574	167	<u>577</u>	<u>166</u>	620	154
437.leslie3d	8	<u>1013</u>	<u>74.3</u>	1014	74.2	1012	74.3	4	460	81.7	462	81.4	<u>461</u>	<u>81.6</u>
444.namd	8	441	146	<u>440</u>	<u>146</u>	440	146	8	<u>432</u>	<u>148</u>	433	148	431	149
447.dealII	8	<u>333</u>	<u>275</u>	338	271	324	282	8	<u>333</u>	<u>275</u>	338	271	324	282
450.soplex	8	<u>876</u>	<u>76.2</u>	909	73.4	860	77.6	4	365	91.4	<u>361</u>	<u>92.5</u>	357	93.5
453.povray	8	<u>167</u>	<u>254</u>	168	253	162	263	8	144	296	141	301	<u>142</u>	<u>300</u>
454.calculix	8	254	260	258	256	<u>255</u>	<u>258</u>	8	254	260	258	256	<u>255</u>	<u>258</u>
459.GemsFDTD	8	1200	70.7	<u>1196</u>	<u>71.0</u>	1193	71.1	8	1200	70.7	<u>1196</u>	<u>71.0</u>	1193	71.1
465.tonto	8	456	173	481	164	<u>464</u>	<u>170</u>	8	451	175	<u>462</u>	<u>170</u>	474	166
470.lbm	8	<u>782</u>	<u>141</u>	781	141	782	141	8	<u>782</u>	<u>141</u>	781	141	782	141
481.wrf	8	<u>655</u>	<u>136</u>	655	136	655	136	8	652	137	<u>652</u>	<u>137</u>	651	137
482.sphinx3	8	1186	131	1082	144	<u>1175</u>	<u>133</u>	8	1068	146	1058	147	<u>1063</u>	<u>147</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS setting:
Operating Mode set to Maximum Performance
Sysinfo program /home/SPECcpu-new/config/sysinfo.rev6818

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3250 M5
(Intel Xeon E3-1240 v3, 3.40 GHz)

SPECfp_rate2006 = 153

SPECfp_rate_base2006 = 147

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Mar-2014
Hardware Availability: Dec-2013
Software Availability: Sep-2013

Platform Notes (Continued)

\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191
running on x3250M5 Thu Mar 6 00:01:10 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E3-1240 v3 @ 3.40GHz
 1 "physical id"s (chips)
 8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 4
  siblings  : 8
  physical 0: cores 0 1 2 3
 cache size : 8192 KB
```

```
From /proc/meminfo
MemTotal:      16299396 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux x3250M5 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Mar 4 11:30
```

```
SPEC is set to: /home/SPECcpu-new
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/mapper/vg_x3250m5-lv_home
                ext4      852G  29G  780G   4% /home
```

```
Additional information from dmidecode:
BIOS IBM -[JUE1090US-1.00]- 11/20/2013
Memory:
2x 0000      1600 MHz
2x Micron 18KSF1G72AZ-1G6E1 8 GB 1600 MHz 2 rank
```

(End of data from sysinfo program)
"2x 0000 1600 MHz" memory information from dmidecode indicates unused DIMM slots.



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3250 M5
(Intel Xeon E3-1240 v3, 3.40 GHz)

SPECfp_rate2006 = 153

SPECfp_rate_base2006 = 147

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Mar-2014
Hardware Availability: Dec-2013
Software Availability: Sep-2013

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/SPECcpu-new/libs/32:/home/SPECcpu-new/libs/64:/home/SPECcpu-new/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RedHat EL 6.4
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3250 M5
(Intel Xeon E3-1240 v3, 3.40 GHz)

SPECfp_rate2006 = 153

SPECfp_rate_base2006 = 147

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Mar-2014
Hardware Availability: Dec-2013
Software Availability: Sep-2013

Base Optimization Flags (Continued)

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3250 M5
(Intel Xeon E3-1240 v3, 3.40 GHz)

SPECfp_rate2006 = 153

SPECfp_rate_base2006 = 147

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Mar-2014

Hardware Availability: Dec-2013

Software Availability: Sep-2013

Peak Portability Flags (Continued)

465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
-unroll2

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3250 M5
(Intel Xeon E3-1240 v3, 3.40 GHz)

SPECfp_rate2006 = 153

SPECfp_rate_base2006 = 147

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Mar-2014
Hardware Availability: Dec-2013
Software Availability: Sep-2013

Peak Optimization Flags (Continued)

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-HSW-A.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-HSW-A.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Mon Sep 22 17:25:49 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 25 March 2014.